
CUI Devices is now Same Sky! Learn More

same sky

SERIES: TS42 | DESCRIPTION: TACTILE SWITCH

FEATURES

- ultra thin
- 160, 260 & 350 gf



RoHS

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage		1		12	Vdc
rated current		0.01		50	mA
withstanding voltage	for 1 minute		250		Vac
contact resistance	applying load of 2 times operating force at 5 Vdc, 10 mA			100	mΩ
insulation resistance	at 100 Vdc for 1 minute	100			MΩ
operating force	160 gf model 260 gf model 350 gf model	110 190 260	160 260 350	210 330 440	gf gf gf
return force		20			gf
actuator travel		0.10	0.20	0.30	mm
operating temperature		-30		80	°C
storage temperature		-40		90	°C
life	5 Vdc, 5 mA, 2 cycles/second, 1.5 times operating force 160 & 260 gf models 350 gf model		80,000 100,000		cycles cycles
vibration	10~55~10 Hz, 1.5 mm amplitude, 2 hours on each XYZ				
flammability rating	see material table				
RoHS	yes				

PART NUMBER KEY


TS42 - 5252 - 09 - Y - XXX - SMT - TR


- TS42 - 5252: Base Number
- XXX: Push Force:
  160 = 160 gf
  260 = 260 gf
  350 = 350 gf


MECHANICAL DRAWING


units: mm
tolerance: ±0.2 mm
unless otherwise noted

DESCRIPTION	MATERIAL	PLATING/COLOR
terminals	phosphor copper	silver
housing	PA6T (UL94HB)	black
contacts	SUS	silver
cover	SUS	--
film	PI	yellow

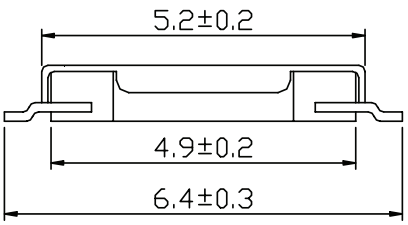

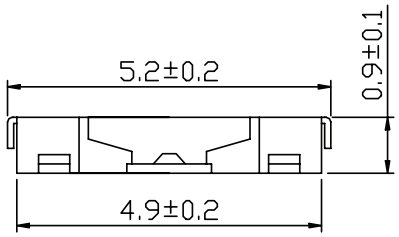


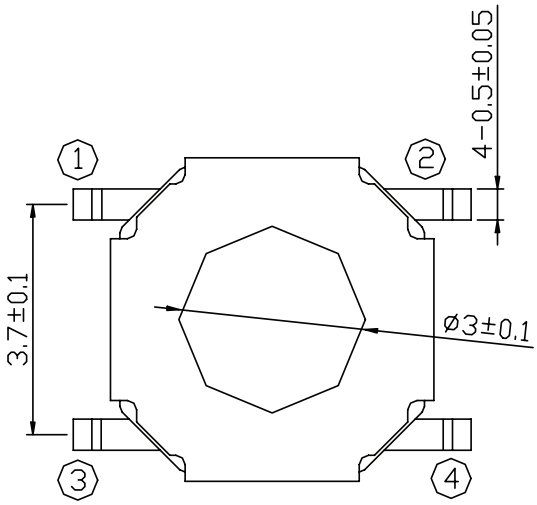

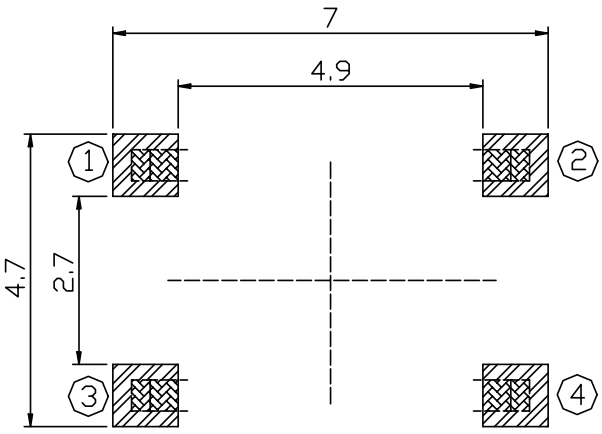


Recommended PCB Layout
Top View

ACTUATOR POSITION [ ]: MOMENTARY	
NORMAL	DOWN
OFF	[ON]
SCHEMATIC	



SOLDERABILITY


parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 3 seconds			350	°C
reflow soldering	see reflow profile			260	°C

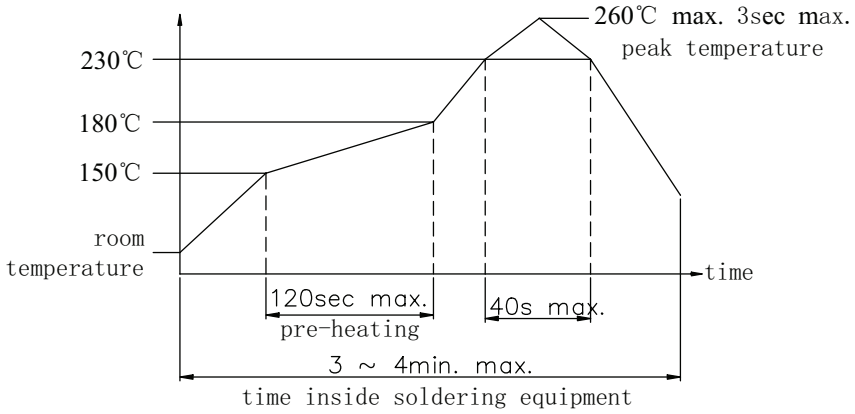

PACKAGING

units: mm

Reel Size: Ø330 mm
Reel QTY: 4,000 pcs per reel

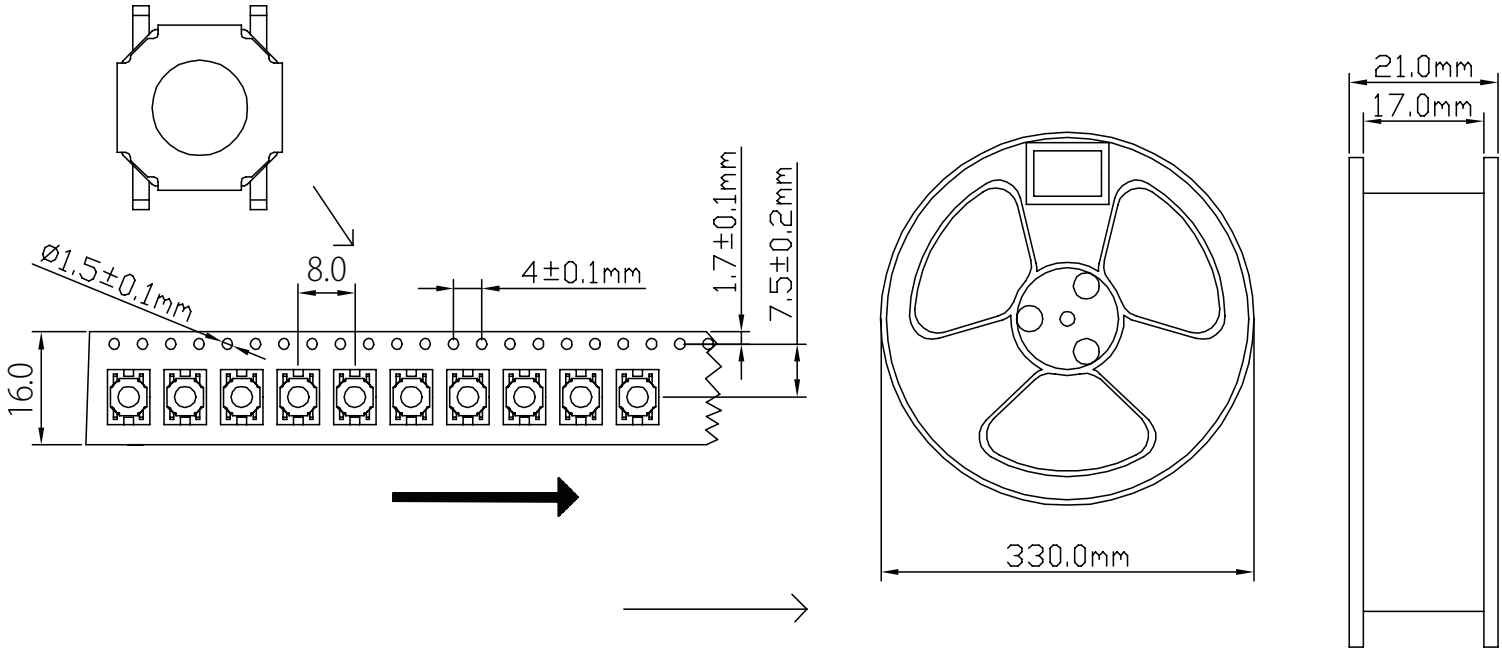

REVISION HISTORY

rev.	description	date
1.0	initial release	11/20/2025

The revision history provided is for informational purposes only and is believed to be accurate.

same sky

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

sameskydevices.com