


Essentials

Agent builder (Studio)

Drag and drop builder

In general, we model a conversation as a series of conversation steps. Each conversation step has its own box or AI mini agent to instruct it in plain language.

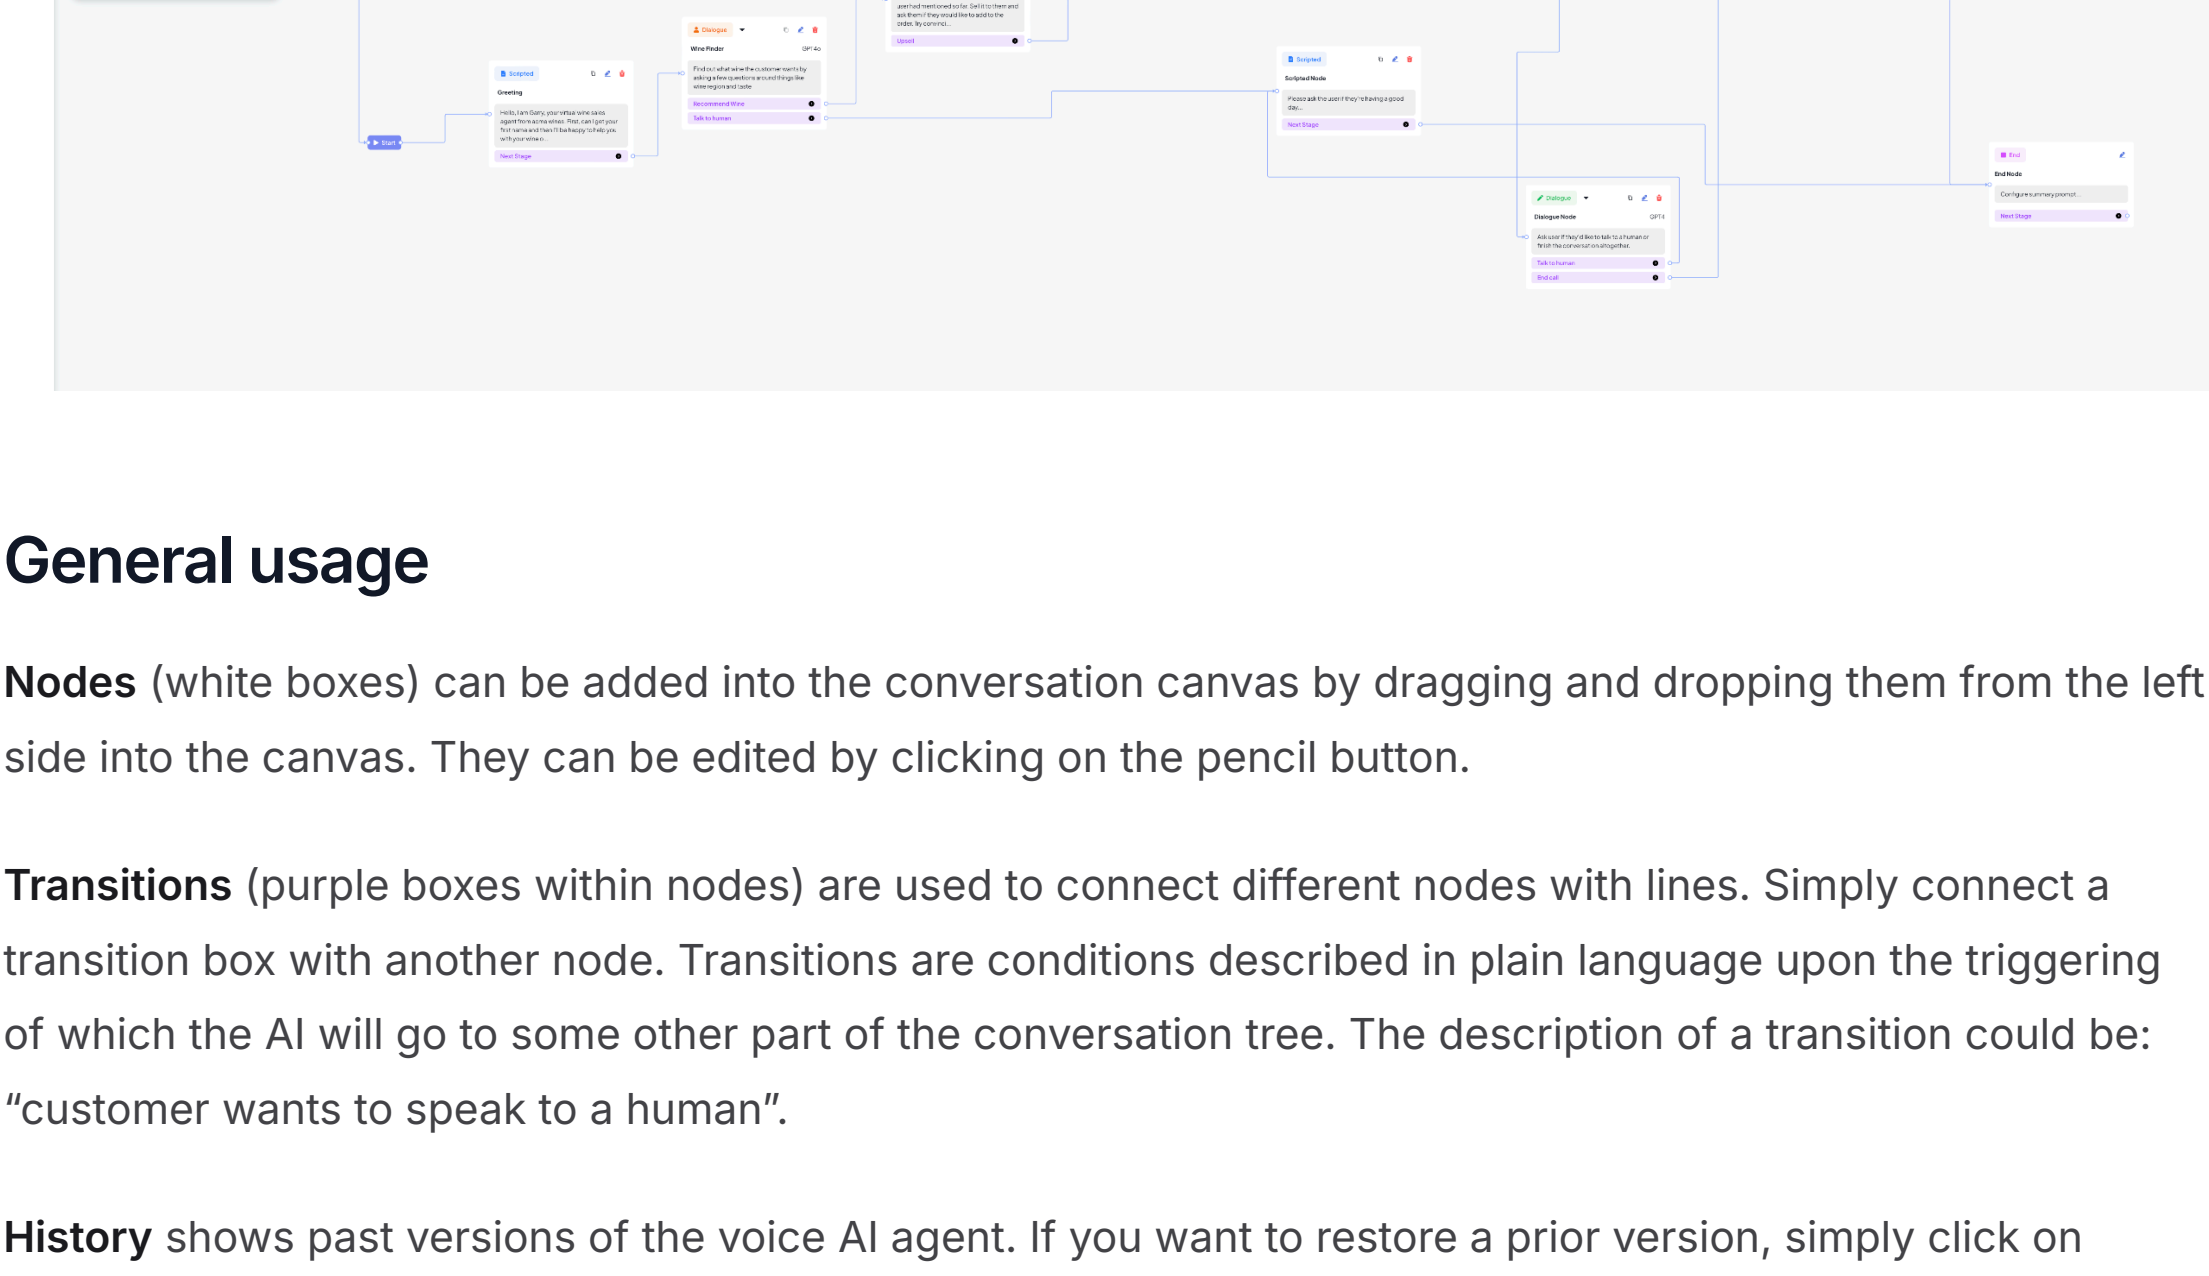

General usage

Nodes (white boxes) can be added into the conversation canvas by dragging and dropping them from the left side into the canvas. They can be edited by clicking on the pencil button.

Transitions (purple boxes within nodes) are used to connect different nodes with lines. Simply connect a transition box with another node. Transitions are conditions described in plain language upon the triggering of which the AI will go to some other part of the conversation tree. The description of a transition could be: "customer wants to speak to a human".

History shows past versions of the voice AI agent. If you want to restore a prior version, simply click on history and select a prior agent version.

Fields are containers of information that can be referenced throughout the conversation. They have default values and can be read / written to throughout the conversation.

Save button can be used to persist changes into the database.

Publish button is used make those saved changes testable. On the right side, one can press the "voice chat" or "text chat" button to test the published voice AI agent. Before pressing **Publish**, make sure that all nodes and transitions are connected.

Phone button allows deploying the changes to a phone number that was assigned to your organisation / that you added from Twilio. If you call that phone number, you can speak to your newly created voice AI agent.

Different node types

Agent Setup

This node uses plain language to describe the overall goal of the AI agent. It should contain the role and the task of the agent. Furthermore, general instructions on how to speak or behave can be included here. Note that the content of this node will be loaded at every turn of the conversation.

Tip: do not include too many details of the script in this node. These details are best placed in the other nodes coming after the start node.

Node Configuration

Save

×

Stage Message

Imagine you are an experienced wine sales agent lexi. You are receiving a call and helping the customers over the phone. Your objective is to sell customers wine.
Please speak in English and never more than 3 sentences at the same time. Please convert all numbers to letters, (e.g. "55" to "fifty five") and avoid generating special characters like "\$", "*", etc.

Other instructions:
– The text you will generate will be spoken via a voicebot.
Therefore, to sound more human, please insert filler words here and there to make the spoken version of the text sound more natural. Insert them especially at the beginning of paragraphs.
Examples of filler words are: "umm", "uhh", "let's see", "ah",

Scripted

The words typed into the Scripted node will be spoken at verbatim, meaning exactly as they are typed into the node. Scripted nodes are especially suitable for the following situations:

- Intro:** Saying the same greeting to every customer at the start of the conversation
- Outtro:** Saying the same goodbye message to every customer at the end of the conversation
- Before a call transfer:** Saying a standardised message before transferring the call to a human

Scripted

Copy

Edit

Delete

Greeting

Hello, I am Garry, your virtual wine sales agent from acme wines. First, can I get your first name and then I'll be happy to help you with your wine o...

Next Stage

Dialogue

A dialogue node differs from a scripted node in that you tell the AI what its job is and not which words to say. Plain language is used to give instructions to the AI agent in the stage message. Functions can be selected to give the AI agent abilities to read / write data from external systems.

Transitions can be added to navigate the conversation to another conversation step.

Node Configuration

Save

×

Node Name

Wine Finder

Stage Message

Find out what wine the customer wants by asking a few questions around things like wine region and taste

Functions

Knowledge Bases

☐ Compile Query

☐ nat box

☐ CF rejection handling

Model

GPT4o

Transitions

Add

Recommend Wine

Talk to human

Field setter

The field setter node can be used to set the value for certain variables manually.

Use cases:

- Storing certain information that should be accessed further downstream in the conversation. Example could be storing the intent of a customer.
- Making it easier to filter exported calls. In the example in the screenshot below, we determine if a customer is a qualified customer in a previous step and transition to a field setter node that sets the value of the *qualified* field to *true*. As every field is its own column in the calls export, this allows for easy filtering of qualified customers.
- Detecting voicemail. Setting the field *leaping_call_voicemail_detected* to *true* will mark the status of the call to *No Answer*.

Field Setter

Copy

Edit

Delete

Field Setter Node

qualified = true

Next Stage

Junction

A junction node can check the value of a certain field and depending on its value, route the conversation to one part of the conversation tree or another.

One example is detecting at the beginning of the conversation if the call is an *inbound* or *outbound* call.

Junction

Copy

Edit

Delete

Junction Node

field(leaping_call_direction) == "outbound"

True

False

Function

Generally, functions can be used to read / write from an external data system. They can be executed within a dialogue box or executed as part of a separate stage / node. The advantage of the latter is that the function is executed deterministically 100% of the time.

Function

Copy

Edit

Delete

Get customer info

GPT4o

get_customer_info

Next Stage

Call Transfer

This node will initiate a call transfer to a third party. There are two options: transfer by phone number of transfer by SIP.

In the former, you have to enter the target phone number. Note that the phone number has to have '(country code)' format before the actual phone number.

In the case of transfer by SIP, you have to enter the SIP URI and if relevant, any SIP headers, such as conversation ids. SIP can be either SIP Invite or SIP REFER. Please talk to kevin(dot)wu(at)leapingai(dot)com to evaluate the best possible option for your business.

Call Transfer

Copy

Edit

Delete

Call Transfer Node

Phone Number: +1234567890

Next Stage

End

Calls that reach the End node will be marked as **Completed** in the frontend. A summary will be generated for every call, irrespective of if the call completes or gets dropped. The prompt for the summary is inside the End node.

End

Edit

Summarise the conversation. At the top of the summary, indicate in a separate sentence whether a sale happened or not: "Sale happened: yes/no". This should be decided based upon whether you have presented the customer with a specific health plan AND "Customer wants subsidy" function was triggered earlier in the conversation AND customer provided their social security number. In the rest of the summary, please include the following information from the customer: their first name, their middle name, their last name, their address, the city, the state and the zip code, their date of birth, gender and social security number.

Next Stage

Post conversation

A post conversation node is the same as a function node, but it is executed after the conversation completes, irrespective of the status of the call. An especially good use case is sending a call summary to a CRM.

Post Conversation

Copy

Edit

Delete

Send call summary

GPT4o

Execute the function...

set_call_conclusion

Next Stage

Switch

Overview

The Switch node directs the conversation flow based on the value of a specific Field. It allows you to define multiple **cases** for different values and route the caller accordingly.

Use Cases

For example, you can use the Switch node to route callers based on their country code. Cases might be configured for values such as DE, US, or AU, directing the caller to the appropriate node for their country.

Default Case

If the Field value doesn't match any of the defined cases, the Switch node will automatically use its **default case**, ensuring a fallback path for any unexpected or undefined input.

Switch

Copy

Edit

Delete

intent

Weinbestellung

Rechnungskopie

Werbung abbestellen

Default

Home area

Details

Ask a question...

361

↑