


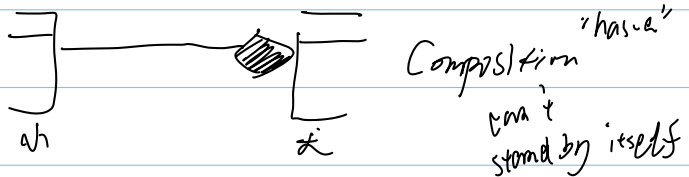
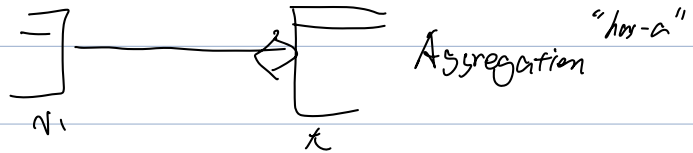

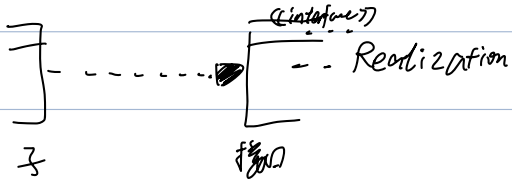
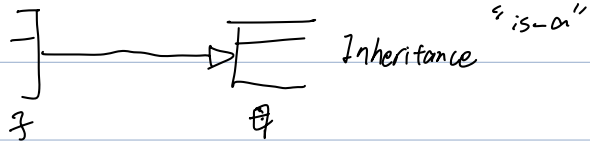



UML class diagram

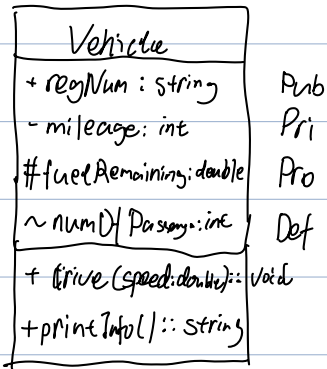

read()
italic → virtual
must be re-implemented

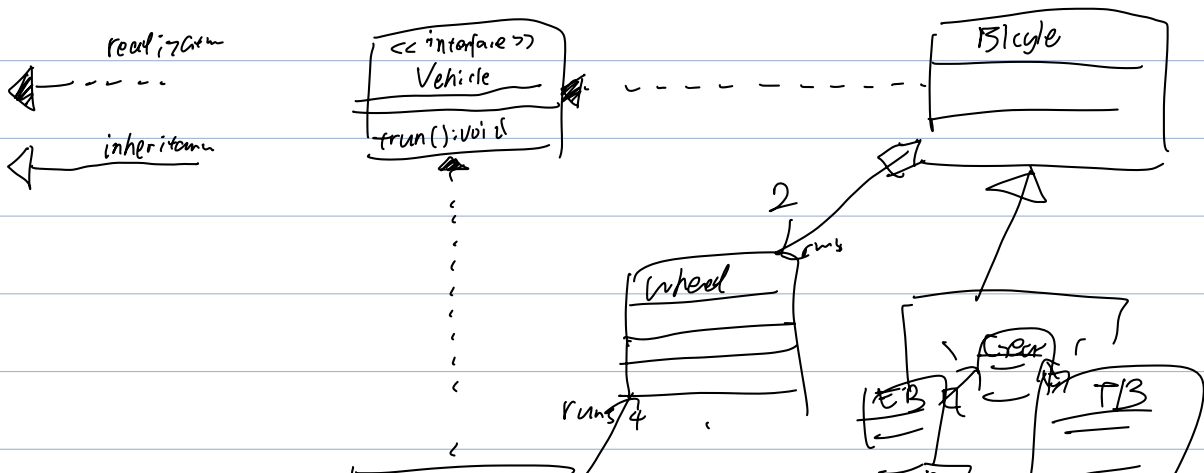

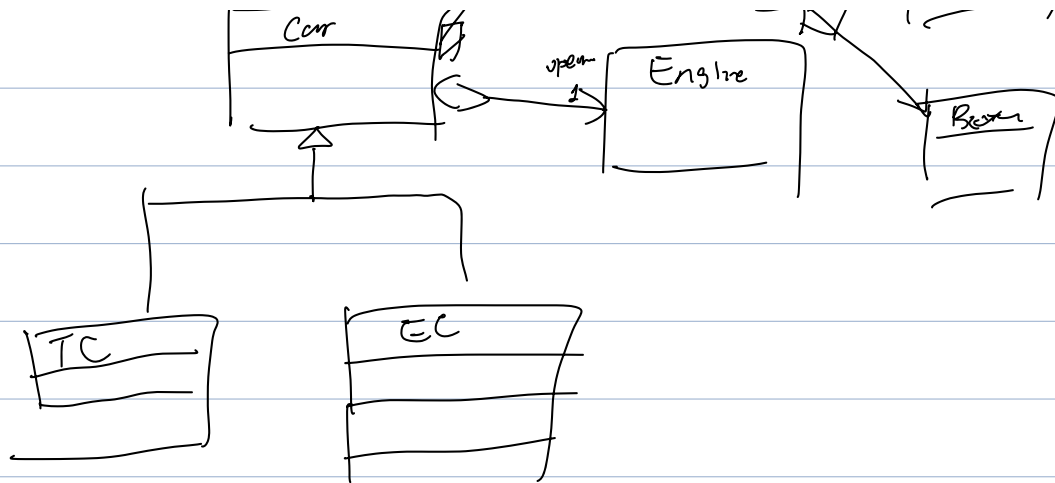

A virtual function is a member function that can be overridden in a derived class, but it may also have a default implementation in the base class. Base class can be instantiated. Virtual function provides polymorphism.

The find command starts in the current directory and prints out all files with "...", recursively descending subdirectories.

```

mkdir -p $"
$?
$^ "$@" $?

```

A unique pointer implies exclusive ownership so cannot be copied.