

LAPORAN PRAKTIKUM
MODUL 9: SYSCALL XINU



Disusun Oleh:

Dhiemas Tulus Ikhsan

2311104046 S1SE-07-02

Dosen Pengampu:

Yudha Islami Sulistya, S.Kom., M.Kom

PROGRAM STUDI S1 REKAYASA PERANGKAT LUNAK

FAKULTAS INFORMATIKA

TELKOM UNIVERSITY PURWOKERTO

2026

JURNAL

1. Buat syscall baru seperti yang ditunjukkan pada modul syscall poin 9.5! (sertakan Screenshot kode dan hasil run)

- a. Membuat syscall baru

```
// Nama: Dhiemas Tulus Ikhsan
// NIM: 2311104046

#include <xinu.h>

/*-----
 * cname - Dummy syscall
 *-----*/
syscall cname(pid32 pid, char *newname) {
    intmask mask;

    mask = disable();

    /* Validasi PID */
    if (isbadpid(pid)) {
        restore(mask);
        return SYSERR;
    }

    /* Validasi nama */
    if (newname == NULL) {
        restore(mask);
        return SYSERR;
    }

    /* Ubah nama proses */
    strncpy(proctab[pid].pname, newname, PNMLEN-1);
    proctab[pid].pname[PNMLEN-1] = '\0';

    restore(mask);
    return OK;
}
```

- b. Menambahkan prototypes.h

```
extern status ascdatetime(uint32, char *);

/* in file bufinit.c */
extern status bufinit(void);

/* in file chprio.c */
extern syscall chprio(pid32, pri16);

/* in file cname.c */
extern syscall cname(pid32, char *);

/* in file clkupdate.S */
extern uint32 clkcount(void);

/* in file clkhandler.c */
extern interrupt clkhandler(void);

/* in file clkinit.c */
extern void clkinit(void);

/* in file clkdisp.S */
extern void clkdisp(void);

/* in file close.c */
extern syscall close(pid32);

/* in file control.c */
extern syscall control(pid32, int32, int32, int32);

/* in file create.c */
extern pid32 create(void *, uint32, pri16, char *, uint32, ...);

/* in file ctxsw.S */
extern void ctxsw(void *, void *);
```

c. xsh_uptime

```

/* xsh_uptime.c - xsh_uptime */

#include <xinu.h>
#include <stdio.h>
#include <string.h>

/*-----
 * xsh_uptime - shell to print the time the system has been up
 *-----
 */
// Dhiemas Tulus Ikhsan
// 2311104046
shellcmd xsh_uptime(int nargs, char *args[])
{
    uint32 days, hrs, mins, secs; /* Days, hours, minutes, and */
                                /* seconds since system boot */
    uint32 secpday = 86400; /* Seconds in a day */
    uint32 secpshr = 3600; /* Seconds in an hour */
    uint32 secpmin = 60; /* Seconds in a minute */

    /* Nama proses baru */
    char prosesBaru[] = "ProcBaru";

    /* For argument '--help', emit help about the 'uptime' command */
    if (nargs == 2 && strcmp(args[1], "--help", 7) == 0) {
        printf("Use: %s\n\n", args[0]);
        printf("Description:\n");
        printf("\tDisplays time since the system booted\n");
        printf("Options:\n");
        printf("\t--help\t display this help and exit\n");
        return 0;
    }

    /* Subtract number of hours */
    hrs = secs/secpshr;
    secs -= hrs*secpshr;

    /* Subtract number of minutes */
    mins = secs/secpmin;
    secs -= mins*secpmin;

    printf("Xinu has been up ");
    if (days > 0) {
        printf(" %d day(s) ", days);
    }

    if (hrs > 0) {
        printf(" %d hour(s) ", hrs);
    }

    if (mins > 0) {
        printf(" %d minute(s) ", mins);
    }

    if (secs > 0) {
        printf(" %d second(s) ", secs);
    }
    printf("\n");

    /* Syscall baru */
    kprintf("Mengubah nama proses ID 5 Menjadi %s...\n", prosesBaru);
    chname(5, prosesBaru);

    return 0;
}

```

d. Output

```

xinu@xinu-develop-end: ~/xinu/compile
File Edit View Search Terminal Help
116598 bytes of Xinu code.
[0x00100000 to 0x0011C775]
148392 bytes of data.
[0x0011FF20 to 0x001442C7]

Obtained IP address 10.0.3.15 (0xa00030f)

-----DHIEMAS TULUS IKHSAN-----
XINU
-----2311104046-----

Welcome to Xinu!

xsh $ uptime
Xinu has been up 1 second(s)

```

2. Perbaiki syscall chprio (xinu/system/chprio.c) dengan memperhatikan validasi input

- Pastikan id adalah angka dari 0 – NPROC
- Pastikan prioritas adalah bilangan yang positif

Compile dan jalankan Xinu dengan syscall yang telah diperbaiki

- make
- clean

```
// Nama: Dhiemas Tulus Ikhsan
// NIM: 2311104046

#include <xinu.h>

/*-----
 * chprio - Change the scheduling priority of a process
 *-----
 */
syscall chprio(pid32 pid, pri16 newprio)
{
    intmask mask;
    struct procent *prptr;
    pri16 oldprio;


    mask = disable();

    if (pid < 0 || pid >= NPROC) {
        restore(mask);
        return SYSERR;
    }

    if (newprio <= 0) {
        restore(mask);
        return SYSERR;
    }

    prptr = &proctab[pid];
    oldprio = prptr->prprio;
    prptr->prprio = newprio;

    restore(mask);
    return oldprio;
}
```

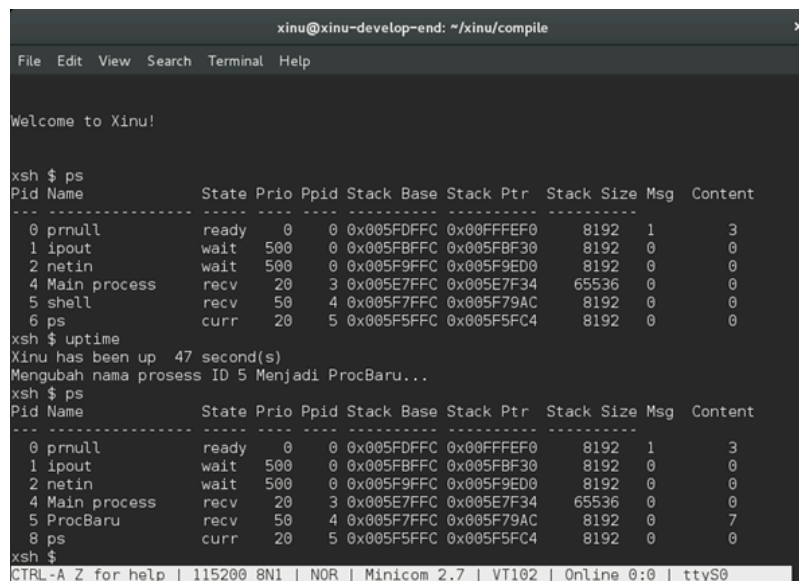

```
xinu@xinu-develop-end: ~/xinu/compile
File Edit View Search Terminal Help

Welcome to Xinu!

xsh $ ps
Pid Name          State Prio Ppid Stack Base Stack Ptr  Stack Size Msg  Content
-----
0 prnull          ready  0    0 0x005FDFFC 0x00FFFEF0 8192 1 3
1 ipout           wait   500  0 0x005FBFFC 0x005FBF30 8192 0 0
2 netin           wait   500  0 0x005F9FFC 0x005F9ED0 8192 0 0
4 Main process    recv   20   3 0x005E7FFC 0x005E7F34 65536 0 0
5 shell           recv   50   4 0x005F7FFC 0x005F79AC 8192 0 0
6 ps              curr   20   5 0x005F5FFC 0x005F5FC4 8192 0 0

xsh $ uptime
Xinu has been up 47 second(s)
Mengubah nama proses ID 5 Menjadi ProcBaru...
xsh $ ps
Pid Name          State Prio Ppid Stack Base Stack Ptr  Stack Size Msg  Content
-----
0 prnull          ready  0    0 0x005FDFFC 0x00FFFEF0 8192 1 3
1 ipout           wait   500  0 0x005FBFFC 0x005FBF30 8192 0 0
2 netin           wait   500  0 0x005F9FFC 0x005F9ED0 8192 0 0
4 Main process    recv   20   3 0x005E7FFC 0x005E7F34 65536 0 0
5 ProcBaru        recv   50   4 0x005F7FFC 0x005F79AC 8192 0 7
8 ps              curr   20   5 0x005F5FFC 0x005F5FC4 8192 0 0

xsh $
CTRL-A Z for help | 115200 8N1 | NOR | Minicom 2.7 | VT102 | Online 0:0 | ttyS0
```

3. Lakukan hal-hal berikut ini

Edit xsh_uptime.c

Tambahkan kode berikut

```
/* Subtract number of hours */
hrs = secs/secperhr;
secs -= hrs*secperhr;

/* Subtract number of minutes */
mins = secs/secpermin;
secs -= mins*secpermin;

printf("Xinu has been up ");
if (days > 0) {
    printf(" %d day(s) ", days);
}

if (hrs > 0) {
    printf(" %d hour(s) ", hrs);
}


if (mins > 0) {
    printf(" %d minute(s) ", mins);
}

if (secs > 0) {
    printf(" %d second(s) ", secs);
}
printf("\n");

/* Syscall baru */
kprintf("Mengubah prioritas proses ID 5 menjadi 33...\n");
chprio(5, 33);

return 0;
}
```

Compile source code dengan perintah; make clean, make kemudian jalankan perintah ps; xsh \$ ps, perhatikan prioritas proses dengan id = 5, jalankan uptime; xsh \$ uptime, perhatikan hasil perintah tsb, jalankan ps; xsh \$ ps, perhatikan prioritas proses dengan id = 5 seharusnya harus berubah

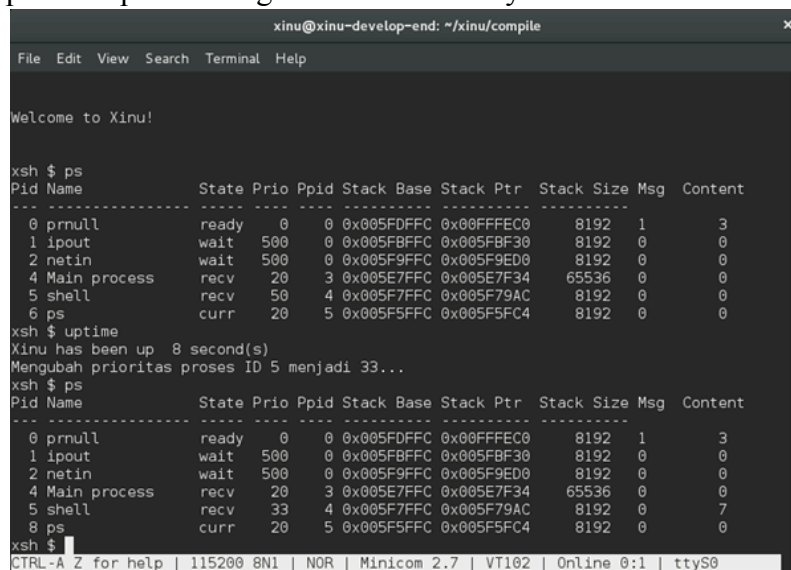

```
xinu@xinu-develop-end: ~/xinu/compile
Welcome to Xinu!

xsh $ ps
Pid Name      State Prio Ppid Stack Base Stack Ptr  Stack Size Msg  Content
-----
0 prnull      ready  0    0 0x005F0FFC 0x00FFFFEC0 8192 1 3
1 ipout       wait   500  0 0x005F8FFC 0x005F8F30 8192 0 0
2 netin       wait   500  0 0x005F9FFC 0x005F9ED0 8192 0 0
4 Main process recv   20   3 0x005E7FFC 0x005E7F34 65536 0 0
5 shell       recv   50   4 0x005F7FFC 0x005F79AC 8192 0 0
6 ps         curr   20   5 0x005F5FFC 0x005F5FC4 8192 0 0

xsh $ uptime
Xinu has been up  8 second(s)
Mengubah prioritas proses ID 5 menjadi 33...

xsh $ ps
Pid Name      State Prio Ppid Stack Base Stack Ptr  Stack Size Msg  Content
-----
0 prnull      ready  0    0 0x005F0FFC 0x00FFFFEC0 8192 1 3
1 ipout       wait   500  0 0x005F8FFC 0x005F8F30 8192 0 0
2 netin       wait   500  0 0x005F9FFC 0x005F9ED0 8192 0 0
4 Main process recv   20   3 0x005E7FFC 0x005E7F34 65536 0 0
5 shell       recv   33   4 0x005F7FFC 0x005F79AC 8192 0 7
8 ps         curr   20   5 0x005F5FFC 0x005F5FC4 8192 0 0

xsh $
```

Testing chprio syscall yang telah diubah

Testing prioritas tidak boleh < 0: Ubah “chprio(5,33)” menjadi “chprio(5,-3)” pada xsh_uptime.c

```
/* Subtract number of hours */
hrs = secs/secperhr;
secs -= hrs*secperhr;

/* Subtract number of minutes */
mins = secs/secpermin;
secs -= mins*secpermin;

printf("Xinu has been up ");
if (days > 0) {
    printf(" %d day(s) ", days);
}

if (hrs > 0) {
    printf(" %d hour(s) ", hrs);
}

if (mins > 0) {
    printf(" %d minute(s) ", mins);
}

if (secs > 0) {
    printf(" %d second(s) ", secs);
}
printf("\n");

/* Syscall baru */
kprintf("Mengubah prioritas proses ID 5 menjadi 33...\n");
chprio(5, -3);

return 0;
}
```

```

xinu@xinu-develop-end: ~/xinu/compile
File Edit View Search Terminal Help

Welcome to Xinu!

xsh $ ps
Pid Name          State Prio Ppid Stack Base Stack Ptr  Stack Size Msg  Content
-----
0 prnull          ready  0    0  0x005FDFFC 0x00FFFE0  8192  1    3
1 ipout           wait  500   0  0x005FBFFC 0x005FBF30  8192  0    0
2 netin           wait  500   0  0x005F9FFC 0x005F9ED0  8192  0    0
4 Main process    recv  20    3  0x005E7FFC 0x005E7F34  65536 0    0
5 shell           recv  50    4  0x005F7FFC 0x005F79AC  8192  0    0
6 ps             curr  20    5  0x005F5FFC 0x005F5FC4  8192  0    0

xsh $ uptime
Xinu has been up  5 second(s)
Mengubah prioritas proses ID 5 menjadi 33...
xsh $ ps
Pid Name          State Prio Ppid Stack Base Stack Ptr  Stack Size Msg  Content
-----
0 prnull          ready  0    0  0x005FDFFC 0x00FFFE9C  8192  1    3
1 ipout           wait  500   0  0x005FBFFC 0x005FBF30  8192  0    0
2 netin           wait  500   0  0x005F9FFC 0x005F9ED0  8192  0    0
4 Main process    recv  20    3  0x005E7FFC 0x005E7F34  65536 0    0
5 shell           recv  50    4  0x005F7FFC 0x005F79AC  8192  0    7
8 ps             curr  20    5  0x005F5FFC 0x005F5FC4  8192  0    0

xsh $
CTRL-A Z for help | 115200 8N1 | NOR | Minicom 2.7 | VT102 | Online 0:0 | ttyS0

```

Testing id adalah valid: Ubah “chprio(5,33)” menjadi “chprio(3000,3)”

```

/* Subtract number of hours */
hrs = secs/secperhr;
secs -= hrs*secperhr;

/* Subtract number of minutes */
mins = secs/secpermin;
secs -= mins*secpermin;

printf("Xinu has been up ");
if (days > 0) {
    printf(" %d day(s) ", days);
}

if (hrs > 0) {
    printf(" %d hour(s) ", hrs);
}

if (mins > 0) {
    printf(" %d minute(s) ", mins);
}

if (secs > 0) {
    printf(" %d second(s) ", secs);
}
printf("\n");

/* Syscall baru*/
kprintf("Mengubah prioritas proses ID 5 menjadi 33...\n");
chprio(3000, 3);

return 0;
}

```

```

Activities Terminal Fri 1 May, 21:54
xinu@xinu-develop-end: ~/xinu/compile
File Edit View Search Terminal Help

Welcome to Xinu!

xsh $ ps
Pid Name          State Prio Ppid Stack Base Stack Ptr  Stack Size Msg  Content
-----
0 prnull          ready  0    0  0x005FDFFC 0x00FFFE0  8192  1    3
1 ipout           wait  500   0  0x005FBFFC 0x005FBF30  8192  0    0
2 netin           wait  500   0  0x005F9FFC 0x005F9ED0  8192  0    0
4 Main process    recv  20    3  0x005E7FFC 0x005E7F34  65536 0    0
5 shell           recv  50    4  0x005F7FFC 0x005F79AC  8192  0    0
6 ps             curr  20    5  0x005F5FFC 0x005F5FC4  8192  0    0

xsh $ uptime
Xinu has been up  7 second(s)
Mengubah prioritas proses ID 5 menjadi 33...
xsh $ ps
Pid Name          State Prio Ppid Stack Base Stack Ptr  Stack Size Msg  Content
-----
0 prnull          ready  0    0  0x005FDFFC 0x00FFFE0  8192  1    3
1 ipout           wait  500   0  0x005FBFFC 0x005FBF30  8192  0    0
2 netin           wait  500   0  0x005F9FFC 0x005F9ED0  8192  0    0
4 Main process    recv  20    3  0x005E7FFC 0x005E7F34  65536 0    0
5 shell           recv  50    4  0x005F7FFC 0x005F79AC  8192  0    7
8 ps             curr  20    5  0x005F5FFC 0x005F5FC4  8192  0    0

xsh $
CTRL-A Z for help | 115200 8N1 | NOR | Minicom 2.7 | VT102 | Online 0:0 | ttyS0

```

Hasil dua testing di atas adalah prioritas tidak berubah karena salah argument (dibuktikan dengan menggunakan perintah ps)