


set_source_column

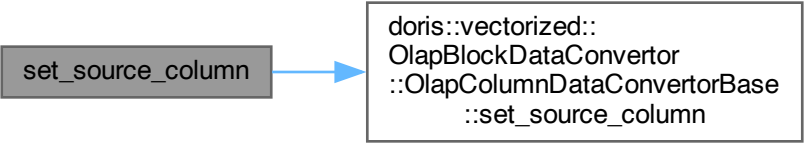

```
graph LR; A[set_source_column] --> B["doris::vectorized::  
OlapBlockDataConvertor  
::OlapColumnDataConvertorBase  
::set_source_column"]; style A fill:#808080,stroke:#333,stroke-width:1px; style B fill:#fff,stroke:#333,stroke-width:1px;
```

The diagram illustrates a function call. On the left, a grey rectangular box contains the text 'set_source_column'. A blue arrow points from this box to a larger white rectangular box on the right. The white box contains the fully qualified name of the function: 'doris::vectorized::OlapBlockDataConvertor::OlapColumnDataConvertorBase::set_source_column'.

doris::vectorized::
OlapBlockDataConvertor
::OlapColumnDataConvertorBase
::set_source_column