


create_remote_storage

init

_create_remote_storage
_internal

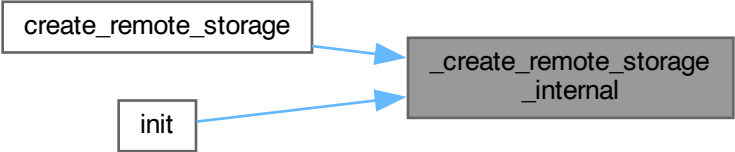

```
graph LR; A[create_remote_storage] --> C[_create_remote_storage_internal]; B[init] --> C;
```

The diagram illustrates two functions, 'create_remote_storage' and 'init', both of which call a common internal function '_create_remote_storage_internal'. 'create_remote_storage' is represented by a white box with a black border, while 'init' is a smaller white box with a black border. The target function '_create_remote_storage_internal' is shown in a gray box with a black border. Blue arrows indicate the flow of calls from the white boxes to the gray box.