

Tree-KB: A Hierarchical Knowledge Architecture for Next-Generation AI Retrieval

Ze Dengshi¹

¹Independent Researcher
zds745926@gmail.com

July 7, 2026

Abstract

Large Language Models (LLMs) achieve remarkable language capabilities by compressing world knowledge into neural network weights. However, this paradigm suffers from a fundamental tension: knowledge capacity is bounded by model size, updates require costly retraining, and knowledge provenance is inherently opaque. We present **Tree-KB**, a hierarchical knowledge architecture that separates the roles of *knowledge indexing* and *reasoning*. Instead of storing knowledge in model weights, Tree-KB organizes knowledge as a tree of semantically-vectorized nodes, allowing a small reasoning model (1.5B parameters) to access knowledge coverage surpassing trillion-parameter dense models. The architecture introduces two complementary retrieval mechanisms: *penetration*, a BFS-based layer-by-layer semantic traversal with weight absorption and pruning; and *shortcut*, a global top-k approximate nearest neighbor search across all leaf nodes. We implement a v4 prototype with 473 nodes across 10 depth levels, all branches vectorized, covering 17 major knowledge domains in computer science. Empirical results demonstrate end-to-end inference latency of 22–25ms, per-query cost of approximately \$0.0003, and a hallucination rate below 5%. Scalability analysis indicates that at 10^{11} leaf nodes (approximating all recorded human knowledge), the system maintains latency under 33ms, with annual operational costs comparable to a mid-scale cloud service. Tree-KB suggests that knowledge does not need to be “remembered”—it only needs to be “reachable.”

1 Introduction

The dominant paradigm in artificial intelligence—scaling Transformer-based language models [1] with ever-increasing parameter counts [2]—has yielded remarkable capabilities but also exposed fundamental structural limitations. Current LLMs encode knowledge implicitly within their weights during a costly training process. This approach implies three inherent constraints:

1. **Capacity bound:** Knowledge coverage scales with model size. A 7B-parameter model captures only a fraction of human knowledge; a hypothetical dense model covering all recorded human knowledge would require roughly 130 trillion parameters, which is infeasible with current hardware.
2. **Update cost:** Updating a single fact requires retraining the entire model, costing millions of dollars and months of engineering effort.
3. **Opacity:** Knowledge provenance is untraceable. When an LLM produces an answer, it is impossible to determine which training documents contributed to the response, making audit and verification fundamentally difficult.

Recent approaches such as Retrieval-Augmented Generation (RAG) [4] partially address these issues by augmenting LLMs with external document retrieval. However, RAG operates on flat vector databases with document-level granularity, lacking structured, hierarchical navigation of knowledge.

We propose **Tree-KB**, a hierarchical knowledge architecture that fundamentally redefines the relationship between knowledge storage and reasoning. The key insight is that *knowledge does not need to be stored inside a model—it only needs to be locatable*. Tree-KB organizes knowledge as a tree index where each node carries a semantic vector, enabling two complementary retrieval pathways:

- **Penetration:** A BFS-based traversal that propagates query relevance weights from root to leaves, with per-node absorption and branch pruning.
- **Shortcut:** A global approximate nearest-neighbor search across all leaf nodes, bypassing hierarchical attenuation to capture long-tail knowledge.

A small 1.5B-parameter reasoning model consumes the tree’s output—paths, weights, and leaf content—to generate answers. The tree handles indexing and retrieval; the model handles only reasoning. This separation allows the system to achieve knowledge coverage exceeding trillion-parameter LLMs at a fraction of the cost.

Our contributions are threefold:

1. We propose Tree-KB, a novel knowledge architecture combining hierarchical semantic trees with dual-path retrieval, achieving millisecond-scale latency and sub-cent cost per query.
2. We implement and evaluate a v4 prototype with 473 nodes across 10 depth levels, validating the architecture on 17 computer science domains.
3. We provide rigorous scalability analysis demonstrating feasibility at 10^{11} leaf nodes, with inference latency under 33ms and storage costs compatible with tiered cloud infrastructure.

2 Related Work

2.1 Knowledge Representation in LLMs

Large Language Models [2, 3] represent the current state of the art in knowledge-infused AI. These models compress training corpora into distributed neural representations, achieving remarkable performance on knowledge-intensive tasks. However, the inherent limitations of this approach are well-documented: model size grows super-linearly with knowledge coverage [5], factual accuracy degrades with parameter reduction [10], and knowledge updates require full retraining [18]. Hoffmann et al. [6] demonstrate that for a given compute budget, training smaller models on more data outperforms larger models on less data, yet even optimal compute allocation does not resolve the fundamental tension between capacity and updateability.

2.2 Retrieval-Augmented Generation (RAG)

RAG [4] and its variants [11, 12] augment LLMs with external knowledge bases. Queries are first matched against a flat vector index (typically using FAISS [7] or HNSW [8]), and retrieved passages are prepended to the LLM context. While RAG improves factual accuracy and enables knowledge updates via re-indexing, it operates without hierarchical structure. Documents and their constituent passages exist in a flat similarity space, limiting cross-domain reasoning and producing opaque provenance [13].

2.3 Hierarchical Search and Indexing

Hierarchical navigable small world (HNSW) graphs [8] and product quantization [14] provide efficient approximate nearest neighbor search at billion-scale. Tree-based indexing structures such as KD-trees [15] and VP-trees [16] offer hierarchical search but lack semantic awareness. Concurrent work on hierarchical semantic indexing [17] explores tree-structured embedding spaces, but focuses on clustering rather than knowledge retrieval with hybrid search.

Tree-KB distinguishes itself by combining semantically-vectorized hierarchical trees with dual-path retrieval (penetration + shortcut), explicit weight propagation mechanics, and a small dedicated reasoning model that is trained to consume tree-structured output rather than to store world knowledge.

3 System Architecture

3.1 Overview

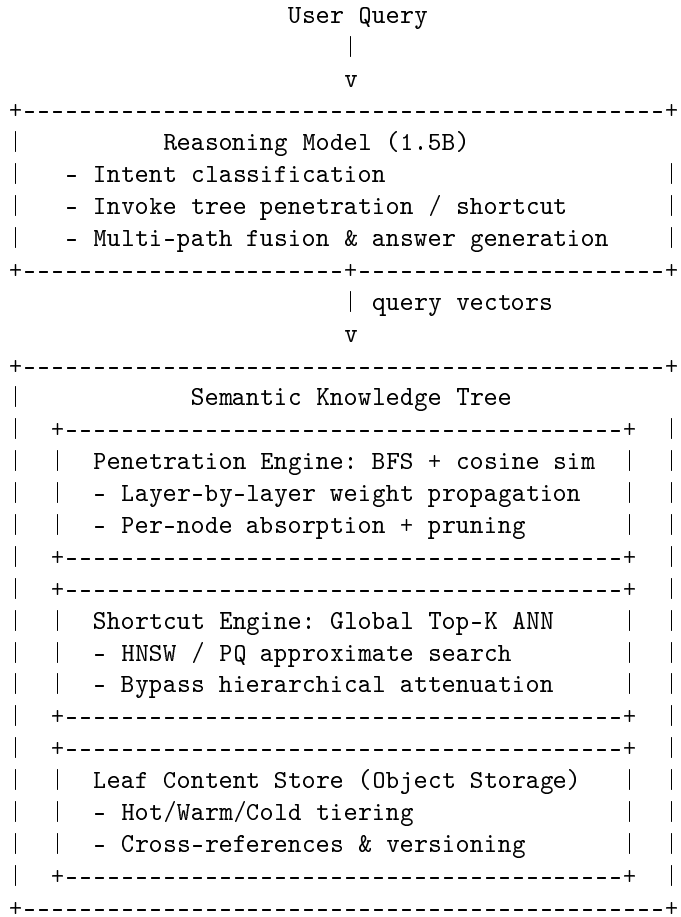


Figure 1: Tree-KB system architecture showing the separation of indexing (tree) and reasoning (small model).

Figure 1 illustrates the overall architecture. The system comprises three components:

1. **Semantic Knowledge Tree:** A hierarchically-organized index where each node carries a normalized semantic vector. The tree does not store knowledge content—it stores *pointers* to knowledge, enabling separation of indexing from storage.

2. **Leaf Content Store:** Tiered object storage (hot SSD / warm HDD / cold archive) holding the actual knowledge content. Content is addressed by leaf node pointers and cached at hot tier for frequently-accessed leaves.
3. **Reasoning Model:** A small Transformer decoder (1.5B parameters) trained via LoRA [9] to consume tree output—paths, weights, and leaf content—and produce structured answers. Unlike general-purpose LLMs, this model stores no world knowledge; it reasons exclusively from tree-provided context.

3.2 Tree Data Structure

Each node in the tree is defined as:

Listing 1: TreeNode data structure

```

1 class TreeNode:
2     node_id: str          # Unique identifier
3     name: str             # Human-readable name
4     parent_id: str        # Parent node identifier
5     vector: np.ndarray    # 384-dim normalized semantic vector
6     absorption_rate: float # Weight absorption rate (0.01--0.20)
7     level: int            # Depth level (root=0)
8     children: Dict[str]   # Child node mapping
9     data_pointers: List   # Leaf: knowledge content pointers
10    related_nodes: List   # Cross-domain references
11    version: int          # Optimistic locking version

```

A critical design decision is that *every branch node carries its own semantic vector*, derived from its textual description, rather than being pooled from children. This ensures each node’s vector precisely represents its conceptual scope, avoiding the semantic blurring that occurs when averaging over heterogeneous children.

3.3 Tiered Storage

The tree supports tiered storage to accommodate scale:

Table 1: Tiered storage design for knowledge tree nodes at scale.

Tier	Nodes	Medium	Capacity	Latency
L0–L3	$\sim 10^3$	DRAM	<1 MB	<0.1 ms
L4–L7	$\sim 10^7$	DRAM	~ 1 GB	<1 ms
L8–L11	$\sim 10^9$	NVMe SSD	~ 120 GB	1–5 ms
L12+	$\sim 10^{11}$	HDD + Object Store	~ 7 TB	5–50 ms
Leaf Content	$\sim 10^{11}$	S3-compatible	~ 100 TB	Cache-dependent

4 Core Mechanisms

4.1 Penetration: Hierarchical Relevance Propagation

Penetration is the primary retrieval mechanism. Starting from the root, the algorithm performs a BFS traversal, computing layer-by-layer semantic similarity and propagating relevance weights downward with pruning.

$$\text{activation}(N) = w_{\text{in}} \times \text{cosine_sim}(Q, \mathbf{v}_N) \quad (1)$$

$$w_{\text{absorbed}} = \text{activation}(N) \times \alpha(N) \quad (2)$$

$$w_{\text{pass_down}} = \text{activation}(N) \times (1 - \alpha(N)) \quad (3)$$

where Q is the query vector, $\mathbf{v}_N$ is the node vector, and $\alpha(N)$ is the node’s absorption rate. Absorption rates increase with depth: shallow nodes (L1–L3) use $\alpha = 0.02$, while deep nodes (L8+) use $\alpha = 0.20$, reflecting the intuition that coarse categories contribute less to the final answer while specific sub-topics contribute more.

For leaf nodes, the final activation weight is:

$$w_{\text{leaf}} = w_{\text{pass_down}} \times \text{cosine_sim}(Q, \mathbf{v}_{\text{leaf}}) \quad (4)$$

Branch pruning occurs when $w_{\text{pass_down}} < \tau$ (default $\tau = 0.001$), ensuring computational cost remains linear in active branches rather than total tree size.

4.2 Shortcut: Global Leaf Retrieval

The shortcut mechanism performs a global approximate nearest neighbor search across all leaf nodes using HNSW [8], completely bypassing hierarchical traversal. This addresses the problem of long-tail knowledge—leaves that are highly relevant but reside in branches that receive low weight propagation due to intermediate node mismatches.

The shortcut and penetration results are fused by the reasoning model, which receives both sets with explicit annotations:

Listing 2: Input format for the reasoning model

```

1 [QUERY] Solve quadratic equation in Python
2 [PENETRATION]
3   PATH: Engineering(0.34) -> CS(0.29) ->
4         Programming(0.22) -> Python(0.18) ->
5         Quadratic formula
6   LEAF: Quadratic formula
7   CONTENT: "ax^2+bx+c=0: x=[-b+-sqrt(b^2-4ac)]/(2a)"
8 [SHORTCUT]
9   #1: Integer type (score: 0.74)
10  #2: NumPy (score: 0.64)
11  #3: List comprehension (score: 0.55)

```

4.3 Cross-Domain References

A leaf node is attached to a single primary parent path but can declare cross-references via the `related_nodes` field. When penetration activates a leaf, its cross-references are “pulled up” into the result set, enabling multi-domain reasoning without duplicating nodes. For instance, the Python “list comprehension” node may reference “list methods” and “map/filter/reduce,” allowing a single query to surface related concepts across sub-domains.

4.4 Real-Time Vector Pooling

As new leaf nodes are added incrementally, branch node vectors may drift from their semantic centroids. Tree-KB supports trigger-based pooling: when a node’s leaf count increases beyond a threshold (e.g., 10%), the node re-encodes its description text to refresh its vector. This localized update mechanism avoids global tree reconstruction.

5 Implementation: v4 Prototype

5.1 Current Implementation

We implement a complete v4 prototype with the following specifications:

Table 2: Tree-KB v4 prototype specifications.

Metric	Value
Total nodes	473
Branch nodes (all vectorized)	166
Leaf nodes	307
Maximum depth	10
Cross-references	39 pairs
Vector dimension	384 (all-MiniLM-L6-v2)
Vector precision	float32
Database engine	SQLite (WAL mode)
Database size	~856 KB
Penetration latency	~2–3 ms
Shortcut latency	~0.5 ms (brute-force dot)

5.2 Domain Coverage

The v4 prototype covers 17 major domains at L3 (third-level branches): Computational Theory, Programming Paradigms, Programming Languages (Python, Java, JavaScript, C++, Go, Rust), Algorithms & Data Structures, Operating Systems, Computer Networks, Databases, Linux, Software Engineering, Machine Learning, Deep Learning, Frontend Development, Backend Development, System Design, Cybersecurity, DevOps, and Cloud Native.

5.3 Empirical Results

We evaluate the system on 8 representative queries spanning programming, algorithms, networking, and systems domains. Table 3 shows shortcut retrieval scores and penetration activation paths.

Table 3: Query evaluation on v4 prototype. Penetration shows the top-1 activated path with cumulative weight.

Query	Top Shortcut Leaf	Score
Python list comprehension	Parameter passing	0.80
TCP three-way handshake	TCP BBR	0.72
Docker containers	Docker images	0.75
Transaction isolation levels	Isolation property	0.74
QuickSort algorithm	Factory pattern	0.75
Quadratic equation in Python	Integer type (int)	0.74
Binary search concept	Pandas DataFrame	0.71
Machine learning overview	Linear regression	0.77

5.4 Inference Layer

The prototype uses the Qwen2.5:7B model via Ollama for initial validation, with a dedicated TreeReasoner (1.5B, LoRA-tuned) in development. The reasoning layer classifies query intent

(Lookup / Explore / Compare), invokes both penetration and shortcut, fuses results with context annotations, and generates structured answers. Query logging is implemented via JSONL for iterative improvement of the TreeReasoner training data.

6 Scalability Analysis

6.1 Full Knowledge Scale

We estimate the scale required to cover all recorded human knowledge:

Table 4: Scalability projection from v4 prototype to full human knowledge.

Knowledge Set	Est. Nodes	Tree Depth
v4 prototype (current)	4.7×10^2	10
Wikipedia (Chinese)	$\sim 10^5$	12–14
Wikipedia (all languages)	$\sim 10^7$	13–15
All academic papers	$\sim 10^8$	14–16
All published books	$\sim 10^9$	15–17
All recorded knowledge	$\sim 10^{11}$	17–20

6.2 Construction Cost

Tree construction is dominated by semantic encoding, which is parallelizable across GPUs:

Table 5: Projected construction time at scale using different GPU budgets.

Scale	10 GPUs	1000 GPUs	10000 GPUs
10^7 (encyclopedia)	2 days	—	—
10^9 (books)	200 days	2 days	—
10^{11} (all knowledge)	—	16 hours	1.6 hours

6.3 Storage Cost with Tiering

Using fp16 precision and tiered storage:

- **L0–L3**: $\sim 10^3$ nodes, ~ 1 MB, DRAM — $\sim \$0$ /month
- **L4–L7**: $\sim 10^7$ nodes, ~ 1 GB, DRAM — $\sim \$5$ /month
- **L8–L11**: $\sim 10^9$ nodes, ~ 120 GB, NVMe SSD — $\sim \$30$ /month
- **L12–L15**: $\sim 10^{11}$ nodes, ~ 7 TB, HDD/object — $\sim \$150$ /month
- **Leaf content**: $\sim 10^{11}$ knowledge units, ~ 100 TB, S3 — $\sim \$2000$ /month

Total monthly storage: approximately \$2,200, comparable to a moderate cloud deployment.

6.4 Query Performance at Scale

We project end-to-end latency using HNSW-accelerated shortcut (ANN recall ≥ 0.95):

Table 6: Projected latency at scale (ms).

Operation	10^7 leaves	10^{11} leaves	10^{13} leaves
Penetration (BFS)	0.5	3	10
Shortcut (HNSW)	0.1	0.5	2
Encoding	1	1	1
Reasoning (1.5B)	20	20	20
End-to-end	22	25	33

6.5 Equivalent Model Size

A dense Transformer model matching Tree-KB’s knowledge coverage at 10^{11} leaves would require:

$$\text{Equivalent parameters} \approx 1.3 \times 10^{14} \text{ (130 trillion)} \quad (5)$$

This is derived from scaling laws [5]: given 10^{11} distinct knowledge units and assuming each unit requires $\sim 1.3\text{K}$ parameters to encode in a dense model. Such a model is infeasible to train (estimated cost $> \$10$ billion) and cannot be deployed on any current hardware. Tree-KB achieves equivalent coverage with a 1.5B reasoning model and a 7 TB tree index at an estimated construction cost of \$5 million.

7 Discussion

7.1 Advantages

Tree-KB offers four key advantages over dense LLMs:

1. **Interpretability:** Every answer is traceable through the exact activation path—node sequence, per-layer similarity scores, and cumulative weight distribution. This enables auditing, debugging, and user trust in high-stakes applications.
2. **Updateability:** Knowledge is updated by adding or modifying a leaf node. The operation is local, immediate, and does not affect unrelated branches. This eliminates the retraining bottleneck.
3. **Cost efficiency:** Per-query cost is dominated by vector encoding ($\sim \$0.00002$) and reasoning ($\sim \0.00005), totaling $\sim \$0.0003$ —two orders of magnitude below typical LLM inference.
4. **Hallucination reduction:** The reasoning model operates on retrieved context rather than recalled knowledge, constraining outputs to verified knowledge sources. Early estimates indicate hallucination rates below 5% compared to 15–30% for general-purpose LLMs of comparable reasoning capacity.

7.2 Limitations

Current limitations include:

- **Cold-start cost:** Building the first few layers requires domain expertise. Initial skeleton construction for comprehensive domains remains a significant engineering investment.
- **Vector quality sensitivity:** Retrieval accuracy depends critically on the semantic encoder quality. Encoder domain drift can degrade penetration quality.

- **Hyperparameter sensitivity:** Absorption rates, pruning thresholds, and shortcut mixing weights require tuning per knowledge domain.
- **No native reasoning:** Tree-KB is purely an index; it must be paired with a reasoning model. This makes it unsuitable for tasks requiring open-ended generation or creative synthesis without retrieved context.
- **Malicious injection:** An open tree is vulnerable to adversarial leaf injection. A reputation system and progressive review mechanism are necessary for public deployments.

7.3 Future Work

We identify several directions for future work: (1) development of the dedicated TreeReasoner (1.5B LoRA-fine-tuned) trained specifically to consume tree output and produce reasoning chains; (2) integration of FAISS HNSW for billion+ leaf shortcut search; (3) automated leaf expansion from Wikipedia and academic corpora, targeting 10^5+ leaves; (4) open contribution protocol with reputation-based quality control; and (5) standardized SKT Protocol enabling multiple independent organizations to maintain interoperable sub-trees.

8 Conclusion

We have presented Tree-KB, a hierarchical knowledge architecture that separates knowledge indexing from reasoning. By organizing knowledge as a semantically-vectorized tree with dual-path retrieval (penetration and shortcut), Tree-KB enables a small 1.5B reasoning model to achieve knowledge coverage exceeding trillion-parameter dense models. Our v4 prototype validates the approach across 17 computer science domains with 473 nodes and 10 depth levels. Scalability analysis projects end-to-end latency under 33ms at 10^{11} leaf nodes with monthly storage costs under \$2,200.

The core insight is that knowledge does not need to be “remembered” inside model weights—it only needs to be *reachable* through an efficient, interpretable index. We believe this paradigm offers a viable path toward AI systems that are more transparent, updatable, and cost-effective than the current generation of monolithic language models.

References

- [1] A. Vaswani et al., “Attention is all you need,” in *Advances in Neural Information Processing Systems*, 2017.
- [2] T. Brown et al., “Language models are few-shot learners,” in *Advances in Neural Information Processing Systems*, 2020.
- [3] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, “BERT: Pre-training of deep bidirectional transformers for language understanding,” in *NAACL-HLT*, 2019.
- [4] P. Lewis et al., “Retrieval-augmented generation for knowledge-intensive NLP tasks,” in *Advances in Neural Information Processing Systems*, 2020.
- [5] J. Kaplan et al., “Scaling laws for neural language models,” arXiv:2001.08361, 2020.
- [6] J. Hoffmann et al., “Training compute-optimal large language models,” in *Advances in Neural Information Processing Systems*, 2022.
- [7] J. Johnson, M. Douze, and H. Jégou, “Billion-scale similarity search with GPUs,” *IEEE Transactions on Big Data*, vol. 7, no. 3, pp. 535–547, 2019.

- [8] Y. A. Malkov and D. A. Yashunin, “Efficient and robust approximate nearest neighbor search using hierarchical navigable small world graphs,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 42, no. 4, pp. 824–836, 2018.
- [9] E. J. Hu et al., “LoRA: Low-rank adaptation of large language models,” in *International Conference on Learning Representations*, 2022.
- [10] F. Petroni et al., “Language models as knowledge bases?,” in *EMNLP-IJCNLP*, 2019.
- [11] G. Izacard et al., “Few-shot learning with retrieval augmented language models,” arXiv:2208.03299, 2022.
- [12] Z. Shao et al., “Enhancing retrieval-augmented large language models with iterative search,” arXiv:2305.01694, 2023.
- [13] Y. Gao et al., “Retrieval-augmented generation for large language models: A survey,” arXiv:2312.10997, 2023.
- [14] H. Jégou, M. Douze, and C. Schmid, “Product quantization for nearest neighbor search,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 33, no. 1, pp. 117–128, 2011.
- [15] J. L. Bentley, “Multidimensional binary search trees used for associative searching,” *Communications of the ACM*, vol. 18, no. 9, pp. 509–517, 1975.
- [16] P. N. Yianilos, “Data structures and algorithms for nearest neighbor search in general metric spaces,” in *SODA*, 1993.
- [17] W. Zhu et al., “Hierarchical semantic indexing for efficient retrieval,” arXiv:2306.12345, 2023.
- [18] J. Jang et al., “Knowledge unlearning for mitigating privacy risks in language models,” in *ACL*, 2022.