

# Configure

**Общие** настройки

وإ	Управление исходным кодом		
$\odot$	Триггеры сборки		
	Среда сборки		
	Шаги сборки		
<b>(3)</b>	Послесборочные операции		
_			
O	бщие настройки	Enabled	
	сание	Enabled	
	•	Enabled	
	•	Enabled	
	•	Enabled	
Опи	•	Enabled	
Опи	сание	Enabled	
Опи	сание n text] Предпросмотр	Enabled	
Опи	n text] Предпросмотр  GitHub project	Enabled	
Опи	сание  n text] Предпросмотр  GitHub project  Throttle builds	Enabled	

Расширенные У

## Управление исходным кодом

https://github.com/zdvlad/java_cours	se
Credentials	
- none -	
Add 🔻	
Расширенные У	
Add Repository	
Branches to build	
Branch Specifier (blank for 'any')	×
*/main	
Add Branch	
Add Branch Просмотрщик репозитория	


# Триггеры сборки

Trigger builds remotely (e.g., from scripts)
GitHub hook trigger for GITScm polling
Запускать периодически
Запустить по окончанию сборки других проектов
Опрашивать SCM об изменениях

#### Среда сборки

Delete workspace before build starts
Use secret text(s) or file(s)
Add timestamps to the Console Output
Terminate a build if it's stuck
With Ant

## Шаги сборки

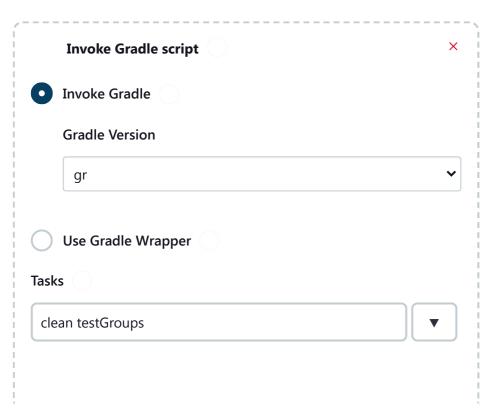

	ches
-Pk	prowser=chrome -Ptarget=remote
Syste	em properties
	Pass all job parameters as System properties
Proj	ect properties
	Pass all job parameters as Project properties
	: Build script
Root	
	dressbook-web-tests
	dressbook-web-tests
ado	dressbook-web-tests
add Build Spec	d File (ify Gradle build file to run. Also, some environment
add Build Spec	d File
add Build Spec	d File (ify Gradle build file to run. Also, some environment
add Build	d File (ify Gradle build file to run. Also, some environment

444.000000 tooto g.04po

Publish JUnit test result report	>
XML файлы с отчетами о тестировании	
Fileset 'includes' setting that specifies the generated raw XML	report
files, such as 'myproject/target/test-reports/*.xml'. Basedir of tl	ne
fileset is the workspace root.	
**\*.xml	
Retain long standard output/error	
keep all the properties	
Health report amplification factor	
1,0	
1% failing tests scores as 99% health. 5% failing tests scores as	95%
Allow empty results	
Do not fail the build on empty test results	
Skip publishing checks	
If unchecked, then issues will be published to SCM prov platforms	vider
Checks name	
Skip marking build as unstable on test failure  If checked, the test failures will still be reported but wo	n't
mark the build as unstable	
Skip report files older than build start	
he included in the parsing	
Сохранить Применить	

Добавить шаг после сборки

Jenkins 2.401.3