

Frontend CMD API Manual

Directory

Revision History:	2
Commands	3
LOGIN	4
#POS	4
#POSEND	4
%POS	4
POSREFRESH	4
#Order	4
#OrderEnd	5
%ORDER	5
%OrderAct	6
#Trade	6
#TradeEnd	6
%TRADE	6
NEWORDER	7
CANCEL	9
REPLACE	9
COMPLEXORDER	10
GET BP	11
BP	11
GET SHORTINFO	11
\$SHORTINFO	11
\$STINFOEX	12
\$LDLU	12
GET LDLU	12
GET SymStatus	12
\$SymStatus	12
GET AccountInfo	12
\$AccountInfo	12
GET POSITIONS/ORDERS/TRADES/LOCATES	12
SB	13
UNSB	13
\$Quote	13
\$T&S	14
\$Lv2	14
\$BAR	15
%IORDER	15
%IPOS	15

%ITRADE.....	15
ECHO.....	15
CLIENT	15
Order Server/Quote Server connection/logon status	15
SCRIPT	16
ReturnFullLv1	16
\$TopLst	16
GET RouteStatus.....	16
\$RouteStatus	16
\$INTMSG	16
GET INTMSGs	17
QUIT	17
Short Locate Commands.....	17
SLPRICEINQUIRE	18
SLNEWORDER	18
SLCANCELOrDER	18
SLOFFEROPERATION	18
%SLRET	18
#SLOrder.....	18
#SLOrderEnd	18
%SLOrder	19
SLAvailQuery	19
\$SLAvailQueryRet.....	19
SLReuseQuery	19
\$SLReuseQueryRet.....	19
SLRouteMinCharge	19
\$SLRouteMinChargeRet.....	19
ALGO orders:	20
Clearpool ALGO:.....	20
Limitations:	21
Enable/Disable CMD API for an user:.....	22
Configure CMD API port:.....	22
Simple Test method:.....	23

Revision History:

Date	Reviser	Revision Notes
2013/7/18	Tim Bian	Add PrimExch field to lv1 quote data.
2013/9/13	Tim Bian	Add price field to peg order.
2013/10/25	Tim Bian	Return Order Server/Quote Server connection/logon status.
2015/04/15	Tim Bian	Add SCRIPT command.
2018/12/30	Tim Bian	- Remove quotes subscription per data vendor protocol. - Add TIF support for neworder.

2020/04/20	Tim Bian	Add “Realized” for %POS.
2020/11/22	Tim Bian	Update doc to add more examples and fields explanations.
2020/12/09	Tim Bian	Support stocks shortable query.
2021/07/05	Tim Bian	Add Short Locate command set and re-organize the doc.
2021/07/11	Tim Bian	For NEWORDER command, Add "Display=0/Num" parameter for iceberg/hidden order.
2021/08/09	Tim Bian	Add \$LDLU for symbol limit down/up price.
2021/11/10	Tim Bian	Add explanation for current minute chart data not received in time from SB MINCHART LATEST command.
2022/02/03	Tim Bian	Add commands: SLAvailQuery, \$SLAvailQueryRet GET LDLU,GET SymStatus
2022/09/22	Tim Bian	Add commands: Get AccountInfo/\$AccountInfo.
2022/11/30	Tim Bian	Support ‘Minume’ parameter for NEWORDER.
2023/01/13	Tim Bian	For short locate inquiry command, add parameter “ALLROUTEWTTYPE1” to inquire excepting type 1 routes.
2023/02/05	Tim Bian	NEWORDER: support FixTags parameter to set customized FIX tags.
2023/3/12	Tim Bian	Add command “ReturnFullLv1 YES/NO” to return all fields of lv1 or not. Default NO.
2023/05/02	Tim Bian	Update SCRIPT logic to be consistent with hotkey window and support more than one script.
2023/7/30	Tim Bian	Support top list. SB TOPLIST, \$TopLst
2023/9/5	Tim Bian	Append Account and Trader fields to %ORDER.
2023/09/29	Tim Bian	Add commands GET POSITIONS/ORDERS/TRADES/LOCATES to return all positions/orders/trades/locates per request.
2023/10/23	Tim Bian	Support "Pref" (example, Pref=ARCA) and "NotRouteOut" parameters for NEWORDER. Add “GET RouteStatus” to retrieve routes status.
2023/11/15	Tim Bian	Add “Token” field to command “%OrderAct”.
2024/1/24	Tim Bian	Add “\$STINFOEX” for extended symbol info.
2024/4/07	Tim Bian	Add more details for ALGO orders.
2024/4/18	Tim Bian	For Lv2 data, add more columns “UPDATED/REMOVED time”.
2024/5/9	Tim Bian	Add token field for short locate to map from SLNEWORDER to %SLOrder.
2024/05/23	Tim Bian	Add “\$INTMSG” to receive internal message.
2024/6/18	Tim Bian	Short Locate: Add commands “ SLReuseQuery ” and “\$SLReuseQueryRet” for symbol locate reuse status.
2024/7/2	Tim Bian	Add RegSho Y/N flag in \$SHORTINFO for GET SHORTINFO.
2024/09/05	Tim Bian	Update \$INTMSG to add “\$INTMSG” for all parts of the message.
2024/9/24	Tim Bian	Add STOPLMTP to support Stop Limit order with pre/post hours for NEWORDER.
2024/9/30	Tim Bian	Update QNTX ALGO route to use Clearpool ALGO.
2024/12/26	Tim Bian	Add “OrderSrc” field to %ORDER.

Commands

Client: The user connecting to the DAS Frontend API port

Server: DAS Frontend.

Command	Parameters	Notes
LOGIN	Format: LOGIN Trader Password Account 1/0 Example: LOGIN BIAN 12345 TRBIAN 0	The client sends login to the server. Last parameter is optional, 1 means watch, 0 means normal connection. After Login success, the server will send back all positions, orders and trades data to the client.
#POS	Command: #POS symb type qty avgcost initqty initprice	Mark the start when the server sends position list to the client.
#POSEND	Command: #POSEND	Mark the end when the server sends position list to the client
%POS	Format: %POS Symbol Type Quantity AvgCost InitQuantity InitPrice Realized CreateTime Example: #POS symb type qty avgcost initqty initprice Realized CreateTime Unrealized %POS AAPL 3 100 117.34 0 0 0 2022/04/07-09:56:43 -245 %POS MSFT 2 100 210.39 0 0 0 2022/04/07-09:56:43 110 #POSEND	Position Type: 1 – cash; 2 – margin; 3 – short. Left example shows after client login, the server will send position list to the client, start with #POS, end with #POSEND. If a position is created or updated during the trading, the server will only send this position data back, not position start and end marked. Fields: Symbol: Position Symbol. Type: Position Type (cash, margin, short). Quantity: Current position shares. AvgCost: Average cost for this position. InitQuantity: position Overnight shares. InitPrice: position Overnight avgcost. Realized: Realized PL for this position. Unrealized: Unrealized PL when this position was returned. User needs to calculate unrealized PL with subscribed lv1 to get latest unrealized PL.
POSREFRESH		User can use this command to Query all positions.
#Order	#Order id symb b/s mkt/lmt qty lvqty price route status time origOrderid account trader	Mark the start when the server sends order list to the client.

#OrderEnd	#OrderEnd	Mark the end when the server sends order list to the client.
%ORDER	Example: #Order id token symb b/s mkt/lmt qty lvqty cxlqty price route status time origoid account trader orderSrc %ORDER 1 950543235 MSFT B L 100 100 0 333.3 SMAT Accepted 20:47:39 0 730001 BIAN %ORDER 2 950543236 MSFT B L 100 100 0 333.3 SMAT Accepted 20:47:40 0 730001 BIAN #OrderEnd	Orders will be sent to the client when login success, client's request and order status update from the server. Fields: Id: order id, generated by order server. Token: The number set by user for the order, user can user id or token to trace placed order. b/s: B-buy; S-SELL; SS-Short. Type: Same like Type column on frontend order window. Lvqty: left quantity to execute. Cxlqty: Canceled quantity. status: This field implies an order's current status, valid value: Closed: This order is closed. Hold: This order is open, but not sent to the exchange. Sending: this order is sending to the exchange.. Accepted: this order is accepted by the exchange. Canceled: This order has been canceled. Rejected: This order is rejected. Executed: This order is fully executed. Partial: This order is partial filled. Triggered: This order is an auto-route order and fully or partially executed. Time: Order update time. origoid: For GTC order, it's the order id in previous days. For complex order, all legs' original order id is 1st leg's order id.

		orderSrc: the source of order entered, values: Montage, Hotkey, CMDAPI, Basket, AutoStop etc. Especially, CMDAPI means the order is entered by API.
%OrderAct	%OrderAct id ActionType B/S symbol qty price route time notes token	%OrderAct is order's action message. Fields: Id: order id, generated by order server. ActionType: what action happened to this order, action type includes: Sending, Send_Rej, Accept, Canceling, Canceled, CancelRej, TimeOut, Execute, Close, Replaced, Replacing, ReplaceRej. B/S: order's side. Symbol: order's symbol. Qty: order or trade's shares. <i>Execute: current trade's share.</i> <i>Accept/Sending: order's open shares.</i> <i>Send_Rej: Rejected shares.</i> <i>Canceled: Canceled shares.</i> <i>Replaced: New replaced shares.</i> Price: order or trade's price, just for reference for non limit orders. <i>Execute: current trade's price.</i> Route: which route this order was sent to. Time: action happened time. Notes: more explanation for this order action. Token: the token from NEWORDER, for traceability.
#Trade	#Trade id symb b/s qty price route time orderid Liq EcnFee PL	Mark the start when the server sends trade list to the client.
#TradeEnd	#TradeEnd	Mark the end when the server sends trade list to the client.
%TRADE	Example: #Trade id symb B/S qty price route time orderid Liq EcnFee PL	Trades will be sent to the client when login success, client request and new trades

	%TRADE 1 MSFT B 100 28.3 SMAT 18:00:31 3 %TRADE 2 MSFT B 100 28.31 SMAT 18:01:19 4 %TRADE 3 DELL SS 100 14.75 SMAT 18:02:17 5 #TradeEnd	during trading. Fields: Id: trade's id, generated by order server. Trade's id is different with order id. Symb: trade's symbol. B/S: trade's side. Qty: trade's shares. Price: trade's price. Route: which route for this trade. Time: trade's execution time. Ordered: which order this trade executed from. Liq: liquidity flag, 'R': route out; '+' : Add liq; '-' : Remove Liq. EcnFee: ECN fee for the route. PL: Realized PL for covered trade.
NEWORDER	All kinds of orders examples: Limit order: Neworder token b/s symbol route share price Example: NEWORDER 1 B MSFT ARCA 100 200.5 TIF=DAY+ Market order: Neworder token b/s symbol route share MKT Example: NEWORDER 2 S MSFT SMAT 100 MKT TIF=DAY Peg Order: Neworder token b/s symbol route share PEG MID/AGG/PRIM/LAST (optional field) price (optional field) Example: NEWORDER 3 B MSFT INET 100 PEG MID 200.5 TIF=GTC Stop Market: Neworder token b/s symbol route share STOPMKT StopPrice Example: NEWORDER 4 S MSFT SMAT 100 STOPMKT 210.5 TIF=DAY Stop Limit: Neworder token b/s symbol route share STOPLMT StopPrice Price Example: NEWORDER 5 B MSFT SMAT 100 STOPLMT 210.5 210.8	Token: digit number set by the client. It's different from order id which is generated by order server. User can use token to identify returned order. Returned order (%ORDER) has a field "token". Token is stored in c data type int, so Token range is [MIN_INT, MAX_INT]. b/s: B-Buy; S-SELL; SS-SHORT. B/S: order's side: BUY, SELL/Short etc. B: buy order. S: sell order SS: short order. Notes: order server will correct S or SS with checking symbol's position. BO: buy to open, for options order. BC: buy to close, for options order. SO: sell to open, for options order. SC: sell to close, for options order. Symbol: order's symbol. Route: which route user wants to send this order to.

	TIF=DAY Stop Limit with Pre/Post hours: Neworder token b/s symbol route share STOPLMTP StopPrice Price Example: NEWORDER 5 B MSFT SMAT 100 STOPLMTP 210.5 210.8 TIF=DAY Stop Trailing: Neworder token b/s symbol route share STOPTRAILING TrailPrice Example: NEWORDER 6 S MSFT SMAT 100 STOPTRAILING 0.2 Stop Range: Neworder token b/s symbol route share STOPRANGE/STOPRANGEMKT LowPrice HighPrice Example: NEWORDER 7 B MSFT SMAT 100 STOPRANGE 210.2 210.6 NEWORDER 7 B MSFT SMAT 100 STOPRANGEMKT 210.2 210.6 Hidden order: Neworder token b/s symbol route share price Display=0/num “Display” is same with “Display” field of montage. Example: NEWORDER 1 B MSFT ARCA 300 200.5 GTC=DAY+ Display=0 ALGO order: Place algo order (TWAP/VWAP etc.), refer to section ALGO order, example: NEWORDER 1 B LLAP ALGO 100 1.20 TIF=DAY FixTags=ALGO Type=TWAP S T=15:46:36 ET=15:50:00	Like ARCA, INET etc. SMAT is a special route maintained by DAS, broker can specify a route to be triggered from SMAT depending on time/symbol exchange etc. TIF: default time in force is DAY+. If want to specify a TIF, appending TIF to the end. Example: Neworder token b/s symbol route share price TIF=GTC TIF values: DAY, DAY+, IOC, GTC, AtOpen, AtClose, FOK. For GTD, format like: TIF=2023/02/28-15:30:20 (Expired date+time) TIF=2023/03/04 (Expired date) TIF=15:30:20 (Expired time) Display: Same to montage ‘Display’ box. Append to command end. Usage example: Display=100 Minume: Same to montage ‘Minume’ box, valid values: AON, NHOLD. Default is ANY. Append to command end. Usage example: Minume=AON, Minume=NHOLD. Command example: NEWORDER 1 B MSFT ARCA 100 200.5 TIF=DAY+ Minume=NHOLD FixTags: Set customized FIX tags value. Command example: NEWORDER 1 B MSFT ARCA 100 200.5 TIF=DAY+ FixTags=9118=ABC 9732=DEF PostOnly: Order is post only. Example: NEWORDER 1 B MSFT ARCA 100 200.5 PostOnly Notes: For stop market/limit orders, some routes may not support, but DAS maintained route “SMAT” can support
--	---	---

		all stop types. For stop order types, stop price, trail price, range prices, they are same with montage fields, please refer to related frontend documents. NotRouteOut: Not route out, same to check “NR” checkbox of montage. NEWORDER 1 B MSFT ARCA 100 200.5 NotRouteOut Pref: Same to “Pref” field of montage. Can be used to specify triggered route for SMAT orders. Example: NEWORDER 4 S MSFT SMAT 100 STOPMKT 210.5 TIF=DAY Pref=ARCA
CANCEL	Cancel an order: CANCEL orderid Cancel all open orders: CANCEL ALL	Cancel an order or all open orders. Orderid: orderid returned by %ORDER.
REPLACE	All kinds of replace examples: Limit order: REPLACE orderid share price Example: REPLACE 1 100 200.5 TIF=DAY+ Market order: REPLACE orderid share MKT Example: REPLACE 2 100 MKT Peg Order: REPLACE orderid share PEG MID/AGG/PRIM/LAST (optional field) price (optional field) Example: REPLACE 3 100 PEG MID 200.5 Stop Market: REPLACE orderid share STOPMKT StopPrice Example: REPLACE 4 100 STOPMKT 210.5 Stop Limit: REPLACE orderid share STOPLMT StopPrice Price Example: REPLACE 5 100 STOPLMT 210.5 210.8	

	Stop Trailing: REPLACE orderid share STOPTRAILING TrailPrice Example: REPLACE 6 100 STOPTRAILING 0.2 Stop Range: REPLACE orderid share STOPRANGE/STOPRANGEMK T LowPrice HighPrice Example: REPLACE 7 100 STOPRANGE 210.2 210.6 REPLACE 7 100 STOPRANGEMKT 210.2 210.6	
COMPLEXORDER	Complex new order. Format example: COMPLEXORDER Route=ARCAL/ARCAM TIF=DAY/DAY+/GTC/... NetPrice=0.5 AON=Y/N LegSym=+MSFT^C85200 LegToken=token1 Side=BO/BC/SO/SC/B/S Share=1 LegSym=+MSFT*C85200 LegToken=token2 Side=BO/BC/SO/SC/B/S Share=1 Example: COMPLEXORDER Route=COMPL TIF=DAY NetPrice=0.5 AON=Y LegSym=+MSFT^GCI400 LegToken=1 Side=BO Share=1 LegSym=+MSFT*GCI400 LegToken=2 Side=SO Share=1 Each leg of complex order is like a single order. There will be separate order id for each leg. LegToken can be used to identify each leg. And all legs have the same origoid. Below is an example with 2 legs. COMPLEXORDER Route=COMPL TIF=DAY NetPrice=0.5 AON=Y LegSym=+MSFT^GCI400 LegToken=1 Side=BO Share=1 LegSym=+MSFT*GCI400 LegToken=2 Side=SO Share=1	Route: suffix 'L' for limit order, suffix 'M' for market order. NetPrice: >0, Debit; <0, Credit; 0, Even. Requested for limit order. TIF: default to DAY order if no this field. AON: default not AON if no this field. LegSym: Each leg starts with LegSym. LegSym is the leg order's symbol. Complex order has multi legs, each leg has its symbol, just like a single options order's symbol. LegSym should be in DAS format, like +SPY^EBT535, it's SPY 535 CALL 20241129. We have a doc for Options symbol of DAS, OptionSymbols.pdf: https://dastrader.com/documents/OptionSymbols.pdf LegToken is an integer. It's same rule with NEWORDER's Token field. Options Leg side: BO: buy to open. BC: buy to close. SO: sell to open. SC: sell to close. Equity leg side: B: buy S: sell/short.

	Leg1: %ORDER 56 1 +MSFT^GCI400 B L 1 1 0 116.35 COMP Accepted 20:14:11 56 TRBIAN BIAN %OrderAct 56 Accept Buy +MSFT^GCI400 1 116.35 COMP 20:14:10 1 Leg2: %ORDER 57 2 +MSFT*GCI400 SS L 1 1 0 34.8 COMP Accepted 20:14:11 56 TRBIAN BIAN %OrderAct 57 Accept Shrt +MSFT*GCI400 1 34.8 COMP 20:14:10 2	Notes: need to subscribe each leg's level1 before placing complex order.
GET BP	GET BP	Get current buying power of login account.
BP	Format: BP CurrentBP CurrentOverNightBP Example: #buyingpower bp,nbp BP 94339 100000	The server sends the account's current day buying power and overnight buying power of the account.
GET SHORTINFO	Format: GET SHORTINFO Symbol Example: GET SHORTINFO MSFT	Get a symbol's short info, including shortable, short size, marginable, long/short margin rate.
\$SHORTINFO	Format: \$SHORTINFO Symbol shortable(Y/N) shortsize Marginable(Y/N) longMarginRate shortMarginRate ShortProhibited(Y/N) RegSho(Y/N) Example: \$SHORTINFO MSFT Y 10000 Y 0 0 N	This is returned symbol shortable info queried by "GET SHORTINFO". Fields: shortable(Y/N): Y – Shortable; N – Not shortable. Shortsize: max short size for an order. Marginable(Y/N): Y- Marginable; N-Not Marginable (full cash) longMarginRate: Margin rate for a long order/position. 0 means default margin rate. 100 means 100%, 60 means 60% cash requirement. shortMarginRate: Margin rate for a short order/position. 0 means default margin rate. 100 means 100%, 60

		means 60% cash requirement. ShortProhibited: Y – short prohibited RegSho: Y: RegSho. N: Non-RegSho.
\$STINFOEX	Extended info for \$SHORTINFO, like concentration ratio etc. Format: \$STINFOEX symbol extendedInfo Example: \$STINFOEX AC ConcLong: 200%,ConcShr: 50%;	
\$LDLU	Limit Down Price/Limit Up Price. \$LDLU will be returned for command “GET LDLU”. Format: \$LDLU symbol limitDown limitUp	If no \$LDLU return, that means no available limit up/down price.
GET LDLU	Request to return saved \$LDLU. Lvl must be subscribed previously.	
GET SymStatus	Request symbol SSR, Halted etc. status.	
\$SymStatus	Return symbol’s SSR, trading halt status. Format: \$IssueStatus symbol SSR:Y/N TA:H/P/Q/T TAT:HH:MM:SS	SSR: ‘Y’ means they symbol is SSR. TA: Trading action, H: Halted; P: Paused; Q: Quotation resumed; T: Trading Resumed. If no ‘TA’ field, means the symbol is normal for trade. TAT: Trading action happened time. Format HH:MM;SS
GET AccountInfo	Request account’s Open Equity, Current Equity, Realized, Unrealized, Net PL, HTB (locate) Cost, Sec fee, FINRA fee, ECN fee, Commission etc.	
\$AccountInfo	Return account’s data. Format: \$AccountInfo OpenEQ CurrEQ RealizedPL UnrealizedPL NetPL HTBCost SecFee FINRAFee ECNFee Commission Example: \$AccountInfo 750000.00 750866.50 -29932.75 -18376.43 -32558.76 15.00 5.78 0.18 0.15 2604.90	
GET	GET POSITIONS: return all positions. GET ORDERS: return all orders.	

POSITIONS/ORDERS/TRADES/LOCATES	GET TRADES: return all trades. GET LOCATES: return all locates.	
SB	SB Symbol Lv1 SB Symbol tms SB Symbol Lv2 SB Symbol DAYCHART StartDate(YYYY/MM/DD) EndDate(YYYY/MM/DD) SB symbol MINCHART StartTime(YYYY/MM/DD-HH:MM) endTime(YYYY/MM/DD-HH:MM)/LATEST MinType SB TopList	Subscribe symbol quote data: Lv1-level1 tms – time sales Lv2 – Regional level2 Lv2 INET – Total view level2 Lv2 ARCA – ARCA level2 Lv2 BATS – BATS Level2 DAYCHART: request day chart data. MINCHART: request minute chart data. If endTime is “LATEST”, will return latest minute chart data automatically. MinType can be 1, 2, 5, 15, 30, 60 for different minutes, If no this field default to 1 minute chart. TopList – retrieve top list, returned in \$TopLst. NOTES: For MINCHART data, CMDAPI internally retrieves from QS each 30 seconds since SB time. And QS builds minute data with time sale data, so QS can only build previous minute chart data in next minute. For current minute chart data, user can use time sales data to build (1 st ts->open price; last ts-> close price; highest ts->high price; lowest ts->low price; ts shares adding up->volume). User can replace ts-built minute data after minchart data received for that minute.
UNSB	UNSB Symbol Lv1 UNSB Symbol tms UNSB Symbol Lv2 UNSB symbol DAYCHART UNSB symbol MINCHART UNSB TopList	Un-subscribe symbol quote data: Lv1-level1 tms – time sales Lv2 – level2
\$Quote	\$Quote symbol A:askprice Asz:asksize B:bidprice Bsz:bidsize V:volume L:lastprice Hi:highprice Lo:lowprice op:openprice ycl:yesterdayclose tel:todayclose PE:primExchange VWAP:vwapValue T:QuoteTime(HHMMSS)	Symbol’s level1 quote data. Server only sends updated fields to the client. Each field: A:askprice Asz:asksize B:bidprice Bsz:bidsize V:volume

	Example: \$Quote MSFT A:26.33 Asz:2 B:26.32 Bsz:3 V:89765 L:26.35 Hi:0 Lo:0 op:0 ycl:25.96 tcl:0 PE:Q	L:lastprice Hi:highprice Lo:lowprice op:openprice ycl:yesterdayclose tcl:todayclose PE:primExchange VWAP:vwapValue tradesAllDay: trades of all day RVOL: Relative volume T:QuoteTime(HHMMSS)
\$T&S	\$T&S symbol price volume flag time(HH:MM:SS) Exchange B/S/I condition	Symbol's time/sale quote data. flag: a character for trade flag. B/S/I: Indicate trade is B (buy trade), S (Sell Trade) or I (Inside) Condition: a BYTE value. each bit, if set to 1, represents: bit 0, 1, 2, 3: the trade was filled at ask, bid, beyond ask, or beyond bid price; if none of those bits is set to 1, it indicates the trade was filled inside bid and ask. bit 4: this trade is valid for the calculation of high/low price of the day bit 5: this trade is valid for the last price bit 6: this trade is valid for the calculation of total volume of the day NOTES: User can use time sale data to build latest minute chart bar data because SB MINCHART is not real time. But if bit 5 of condition field is 0 ((<i>condition</i> & 0x20)==0), this time sale (could be odd lot trade, average price trades and some others) shouldn't been used as valid sale and to build chart minute bar.
\$Lv2	\$Lv2 symbol condition MMID price size UPDATED/REMOVED time	Symbol's level2 quote data. Column UPDATED/REMOVED: if

		“REMOVED”, means this data is invalid for MMID.
\$BAR	Day chart data: Format: \$Bar symbol date High Low Open Close Volume Example: \$Bar DELL 2011/12/01 15.86 15.54 15.63 15.8 18000917 \$Bar DELL 2011/12/02 16 15.7 15.9 15.7 14972896 \$Bar DELL 2011/12/05 16 15.815 16 15.93 16651965 \$Bar DELL 2011/12/06 16.0095 15.78 15.93 15.86 17414844 \$Bar DELL 2011/12/07 15.98 15.5818 15.75 15.9 14382114 Minute chart data: Format: \$Bar symbol date-time High Low Open Close Volume MinType Example: \$Bar C 2012/01/05-09:09 27.73 27.69 27.73 27.69 5000 1 \$Bar C 2012/01/05-09:08 27.74 27.7 27.74 27.7 900 1 \$Bar C 2012/01/05-09:07 27.7 27.7 27.7 27.7 4550 1 \$Bar C 2012/01/05-09:06 27.71 27.69 27.71 27.7 13950 1 \$Bar C 2012/01/05-09:05 27.74 27.71 27.72 27.74 3100 1	Day/Minute chart data. Please be noted, chart data is not guaranteed sent in sequence from start time to end time, client should check the time to sure the sequence. For minute chart, CMDAPI requests data each 30 seconds. So for current minute data, it's not latest. Time sale data can be used to construct current minute data. Notes: minutes volume adding up may be not equal to related day volume because: Some trades does not belong to a specific minute, for example average priced trade. Some trades are not qualified for the last sale price (and so cannot be counted to the last minute), for example odd lot trade. So, minute chart does not add up.
%IORDER		Same definition with %ORDER, but for watch connection.
%IPOS		Same definition with %POS, but for watch connection.
%ITRADE	%ITRADE Account tradeID symbol Side TradeShares TradePrice route exeTime orderID Trader	Same definition with %TRADE, but for watch connection.
ECHO	ECHO ECHO ON ECHO OFF	ECHO: The server will return ECHO on/off status.
CLIENT	CLIENT	The server will return connected client numbers.
Order Server/Quote Server connection/logon status	#OrderServer:Logon:Successful #OrderServer:Logon:Failed #OrderServer:Connect:Successful #OrderServer:Connect:Failed #QuoteServer:Logon:Successful #QuoteServer:Logon:Failed #QuoteServer:Connect:Successful #QuoteServer:Connect:Failed	

	#QuoteServer:Missing heartbeat #OrderServer:Missing heartbeat #QuoteServer:Lost Connection #OrderServer:Lost Connection	
SCRIPT	SCRIPT WindowName ScriptString... Especially, if WindowName is “ GLOBALSCRIPT ”, it means global script, not for specified window. Example: — SCRIPT — Montage1 SYMBOL MSFT, this will change a montage’s symbol to MSFT. Example: SCRIPT MONTAGE1 SYMBOL=AAPL;Share=123. This will change Montage’s symbol to AAPL and share to 123. For script format, it’s same with the format in hotkey window. Script is separated by ‘;’. SCRIPT GLOBALSCRIPT SwitchDesktop default, this will load default desktop. OTO script:	
ReturnFullLv1	ReturnFullLv1 YES: Return full lv1 quotes each time ReturnFullLv1 NO: Only return changed fields of lv1 each time	
\$TopLst	\$TopLst TopListType symbol1 symbol2 symbol3 ...	TopListType: ● NASActive ● NASGain ● NASLost ● LSTActive ● LSTGain ● LSTLost Use SB TopList to retrieve top list data. Use UNSB TopList to stop retrieving top list data.
GET RouteStatus		Get routes status. Routes status returned in CMD “\$RouteStatus”.
\$RouteStatus	\$RouteStatus ROUTE Enabled/Disabled	Example: \$RouteStatus ARCA Enabled \$RouteStatus ALGO Disabled
\$INTMSG	Internal message sent by the broker. Below is an example, each part is separated by “/r/n”. \$INTMSG Send Time: 2024/09/04 10:12:38 \$INTMSG From: BIAN	Send Time: message send time. From: Who sends the message. To: Message receiver. Title: message title. Msg: message body.

	<i>\$INTMSG To: ALL</i> <i>\$INTMSG Title: This is an internal message</i> <i>\$INTMSG Msg: This is message body line 1. This is message body line 2. This is the end line.</i>	Each part is separated by “/r/n”. For Msg part, a tab key ‘\t’ represents a newline of original message.
GET INTMSGs	Request all internal messages. Message format refer to \$INTMSG.	
QUIT	QUIT	Disconnect from the server.

SCRIPT examples for OTO/OCO orders:

SCRIPT

MONTAGE1

ROUTE=MARKET;Share=100;TIF=DAY+;BUY=Send;TriggerOrder=RT:STOP

STOCTYPE:TRAILING STOPPRICE:2 ACT:SELL QTY:POS TIF:DAY+ TOKEN:1234

Notes: TOKEN is an optional field (digit number) for generated order’s Token.

SCRIPT MONTAGE1 OCO=RT:STOP STOCTYPE:TRAILING StopPrice:1 ACT:SELL QTY:1

TIF:DAY+;BUY=Send

Short Locate Commands

Short locate command set is to request short locate like Trade->Short Locate through CMD interface. There’re 2 kinds of short locate routes. Some commands may only work for one route type as stated in below Notes column.

- **Locate route type 0:** Support price query and place locate order. Frontend GUI like:

- **Locate route type 1:** Support locate order offer accept/reject. Frontend GUI like:

Command	Parameters	Notes
SLPRICEINQUIRE	Format: SLPRICEINQUIRE Symbol LocateShares Route/ALLROUTE/ ALLROUTEWTTYPE1 Example: SLPRICEINQUIRE MSFT 100 LOCATE2	SLPRICEINQUIRE is to inquire related locate price. Locate route type 1 doesn't support this command. If Route is ALLROUTE, this is identical to "Inquire All" of short locate window. And for locate type 1, it's equal to SLNEWORDER and '%SLORDER' returned for offer to be accepted/rejected. ALLROUTEWTTYPE1: same with ALLROUTE but not including type 1 routes.
SLNEWORDER	Format: SLNEWORDER Symbol LocateShares Route token Price(Optional) Example: SLNEWORDER MSFT 100 LOCATE2 1 SLNEWORDER MSFT 100 CLST 2	SLNEWORDER is to place a short locate order. Token: digit number set by the client. Similar with NEWORDER's token field. For Price field, only few routes can support limit price, please check with broker.
SLCANCELODER	Format: SLCANCELODER locateOrderId	SLCANCELODER is to cancel an open locate order. This command is for locate route type 0.
SLOFFEROPERATION	Format: SLOFFEROPERATION locateOrderId Accept SLOFFEROPERATION locateOrderId Reject	SLOFFEROPERATION is to accept or reject an offered locate order. This command is for locate route type 1.
%SLRET	Format: %SLRET RetType Symbol OfferPrice OfferSize Route/Notes Example: %SLRET 1 MSFT 0.012 100 LOCATE2 %SLRET 2 MSFT 0 0 Already Shortable	This command returns the price inquire result for command SLPRICEINQUIRE and SLNEWORDER failure (already shortable etc.) RetType: - 1: normal inquire return, - 2: Failure for Price Inquire or locate new order. OfferPrice: offer price per share. OfferSize: - 0: No shares available to locate - >0: Available shares. Route/Notes: - RetType is 1: Route name for price inquire. - RetType is 2: give fail reason if SLPRICEINQUIRE or SLNEWORDER failed.
#SLOrder	#SLOrder id symb shares openshares exeshares exeprice status route time lmtPrice token notes	Mark the start when the server sends short locate order list to the client.
#SLOrderEnd	#SLOrderEnd	Mark the end when the server sends short locate order list to the client.

%SLOrder	%SLOrder locateOrderID symbol shares openshares exeshares exeprice status route time lmtPrice token notes	Short locate order. Order server will return this message when short locate order action changed. locateOrderID : short locate order id. Shares : Initial requested located shares. Openshares : left to be located shares. Exeshares : located shares. Exeprice : locate price. Status : Pending: sending locate to the route. Waiting: the locate is accepted by the route, waiting to be located. Located: the locate has been located. Offered: For locate route type 1. When locate is in offered status, user can choose to accept or reject the offer. Canceled: the locate has been canceled by the user or the route. Rejected: the locate is rejected by the route. Closed: User rejected the offer, or closed by other reasons. Declined: the locate is declined by the route. lmtPrice : locate limit price, only for few routes.
SLAvailQuery	SLAvailQuery Account Symbol	Query available locate shares to short. Same function with “Availability Query” on Short Locate Window.
\$SLAvailQueryRet	\$SLAvailQueryRet Account Symbol AvailableLocateShares	Query result for SLAvailQuery.
SLReuseQuery	SLReuseQuery Symbol/ALL	Query symbol’s locate can be reused or not. “ALL”: query all non-reused symbols. By default locate can be reused. Notes: Non-reuse symbol list can change intraday per brokers.
\$SLReuseQueryRet	\$SLReuseQueryRet Symbol Yes/No	Result of SLReuseQuery. Yes: Can be reused. No: Can’t be reused.
SLRouteMinCharge	Query minimum charge of locate route(s). Format: SLRouteMinCharge RouteName/ALLROUTE	Some locate routes have minimum charge, if locateShare*locatePrice<minCharge, minCharge will be applied.
\$SLRouteMinChargeRet	SLRouteMinChargeRet Route \$minCharge. Example: SLRouteMinChargeRet LOC7 1	If \$minCharge is 0, means no minimum charge for the route.

ALGO orders:

Supports algo order with FixTags keyword.

example:

NEWORDER 1 B LLAP ALGO 100 1.20 TIF=DAY
FixTags=ALGO|Type=TWAP|ST=15:46:36|ET=15:50:00.

Format:

FixTags=ALGO (or other variant)|Type=AlgoType (TWAP/VWAP etc.)|AlgoParameter1=Value1|AlgoParameter2=Value2|more Parameters separated by '|'. Not all algo parameters are required.

All algo vendors list below, but be noticed not every OM supports all algo vendors, some OMs don't support algo orders.

Clearpool ALGO:

FixTags=ALGO	
AlgoType	DAGG: Dark Aggregator SOR VWAP TWAP POV: Percentage of Volume AP: Arrival Price AUCTION: Auction
Algo Parameters	
ST	Start Time. Format: hh:mm:ss
ET	End Time
OA	open auction. Value: 'Y' or 'N'.
CA	close auction. Value: 'Y' or 'N'.
ME	Minimum Execution Qty
UR	Urgency. Value: 1 (lowest) – 5 (highest)
TV	Target Volume Participation
MINV	Min Percent Volume
MAXV	Max Percent Volume
TA	Target Percentage For Auction. 1 – 1,000
LB	Lower Band Price
UB	Upper Band Price
LBP	Lower Band Percent Volume
UBP	Upper Band Percent Volume
IWP	I Would Price
10B	10b18
SC	Strategy Config

OM routes support clear pool algo:

OM	Route
CPST	ALGO
RGEL	CP
QNTX	ALGO

~~Succession Fox River ALGO:- (Removed)~~

FixTags=ALGOFR	
AlgoType	VWAP TWAP
Algo Parameters	
ST	Start Time. Format: Hh:mm:ss
ET	End Time
PRL	Participation Rate Limit
SW	Sweep Price
OPCT	Open %
CPCT	Close %
OM	Order Duration Minutes
ETY	Elasticity How much leeway the model has to be off the expected fill rate "Low","Medium","High".
OP	Open Participation "YES","NO"
CP	Close Participation "YES","NO"

OM routes support clear pool algo:

OM	Route
QNTX	ALGO

Limitations:

~~One connection can't subscribe more than 50 symbols for level1/Time&Sale, 10 symbols for level2, 50 symbols for day chart/minute chart. (Refer to below table). If client wants to subscribe new symbols after reach the limitation, client should un-subscribe some old symbols to free the resource.~~

For minute chart request, can't exceed 7 days for one time subscribe.

Order/Locate etc. limitation (can be updated after communication with DAS support team):

Items	Default limitation	Notes
Max level1 symbols	100	For SB lv1
Max time sale symbols	50	For SB tms
Max level2 symbols	10	For SB lv2
Max chart symbols	50	For SB daychart/minchart, day charts + minute charts

		can't exceed the limitation.
Order number per second	50	For NEWORDER
Locate inquiry interval in second	3	For SLPRICEINQUIRE
Order cancel number per minute	100	For CANCEL
Order replace number per minute	100	For REPLACE
Complex number per minute	100	For COMPLEXORDER
LOCATE number per minute	100	For SLNEWORDER

Enable/Disable CMD API for an user:


The screenshot shows the 'Trader List' window with the following details:

- Trader:** BIAN, **Br#:** 4
- Type:** Admin, **Open:** Open, **Clr:** Clr
- Pwd:** *****
- Master:** BIAN
- Address:** [Icon]
- ExBr:** [Icon]
- Note:** xxxxxxx

Permission	ID	Logon	Brid	Type	Stat
Adv Web Access	1	TOM	0	Admin	Open
No FrontEnd Access	3	TMOS	TM	Trader	Open
X Iphone Access	4	BIAN	0	Admin	Open
X System Administrator, No Fe	6	SMART	SMT	Admin	Open
Demo Trader	7	TRF1	SMT	Trader	Open
No Datafeed	8	CC	0	Trader	Open
X Admin can change password	9	TEST	TM	Admin	Open
Admin can not change BP	10	FRANK	0	Admin	Open
X Enable Manual Order	11	T1	0	Trader	Open
X Manual Order Administrator	12	T2	0	Trader	Open
Reserved	13	T3	0	Trader	Open
X Allow ShortList Control	14	T4	0	Trader	Open
No Cross Trades	15	T5	0	Trader	Open
X Enable Split Order	16	T6	0	Trader	Open
X Risk Management View	17	T7	0	Trader	Open
X Risk Management Update	18	T8	0	Trader	Open
X CMD API					

Configure CMD API port:

Menu->Setup->Other Configuration

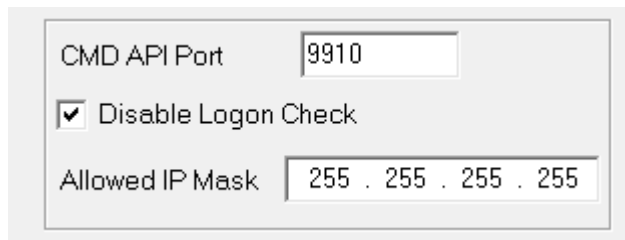

CMD API Port	9910
☒ Disable Logon Check	
Allowed IP Mask	255 . 255 . 255 . 255

“Disable Logon Check”: Quote related commands will not be checked for CMDAPI logon status.
But for entering new order, logon is always needed for CMDAPI.

Simple Test method:

- Start CMD.exe,
- >> telnet APIServer APIPort
- >> login userid password account
- >> NEWORDER ...
- << %ORDER ...
- << %TRADE ...
- << %POS ...
- >> QUIT
- Disconnect from the server.

Notes: APIServer will be 127.0.0.1 if frontend running in the same PC when testing.