



OBJECT ORIENTED PROGRAM

NAME:ZEENAT FAYYAZ
SAP ID:78482
SUBMITTED TO:MAM NAYAB KHALID

Task 1: Hospital Appointments


At City Care Hospital, patients book appointments in three ways: by name only (a general doctor, today), by name and doctor (today), or by name, doctor and day number. Create a class Hospital and overload the book() method three times to handle these cases. Each version should print a confirmation message. Test all three versions in main().

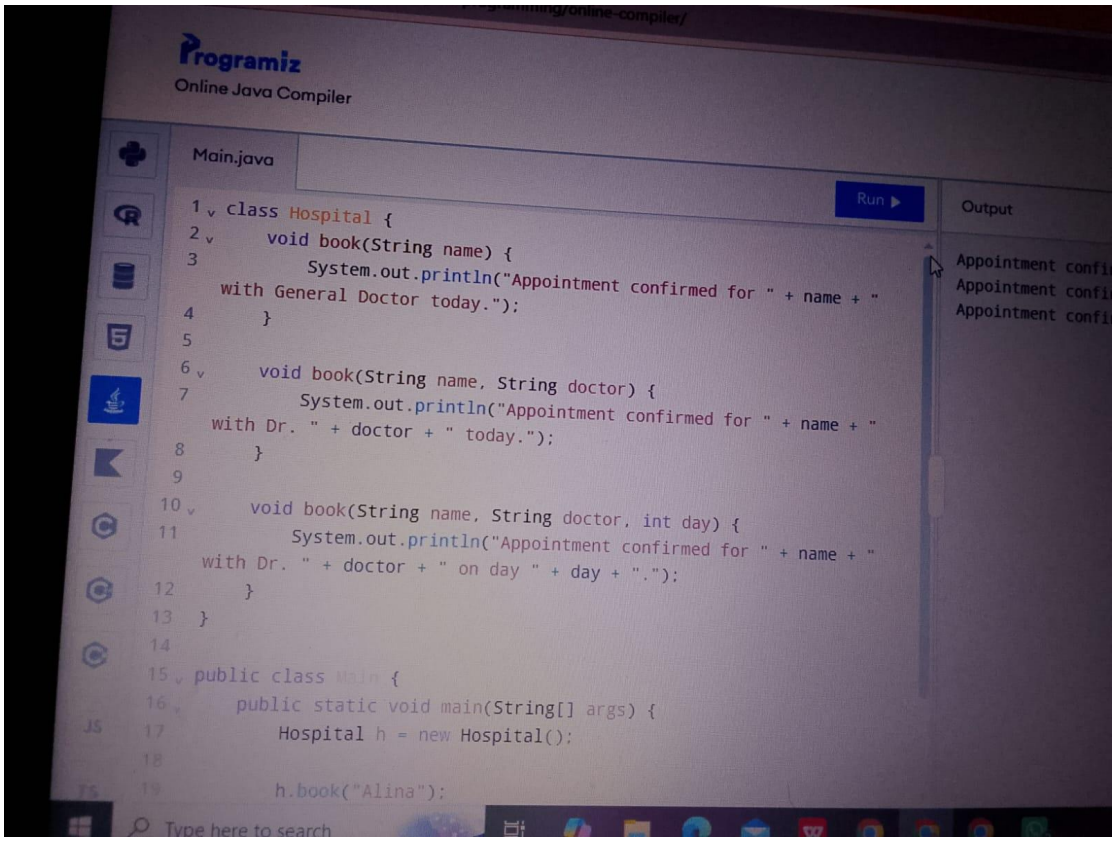


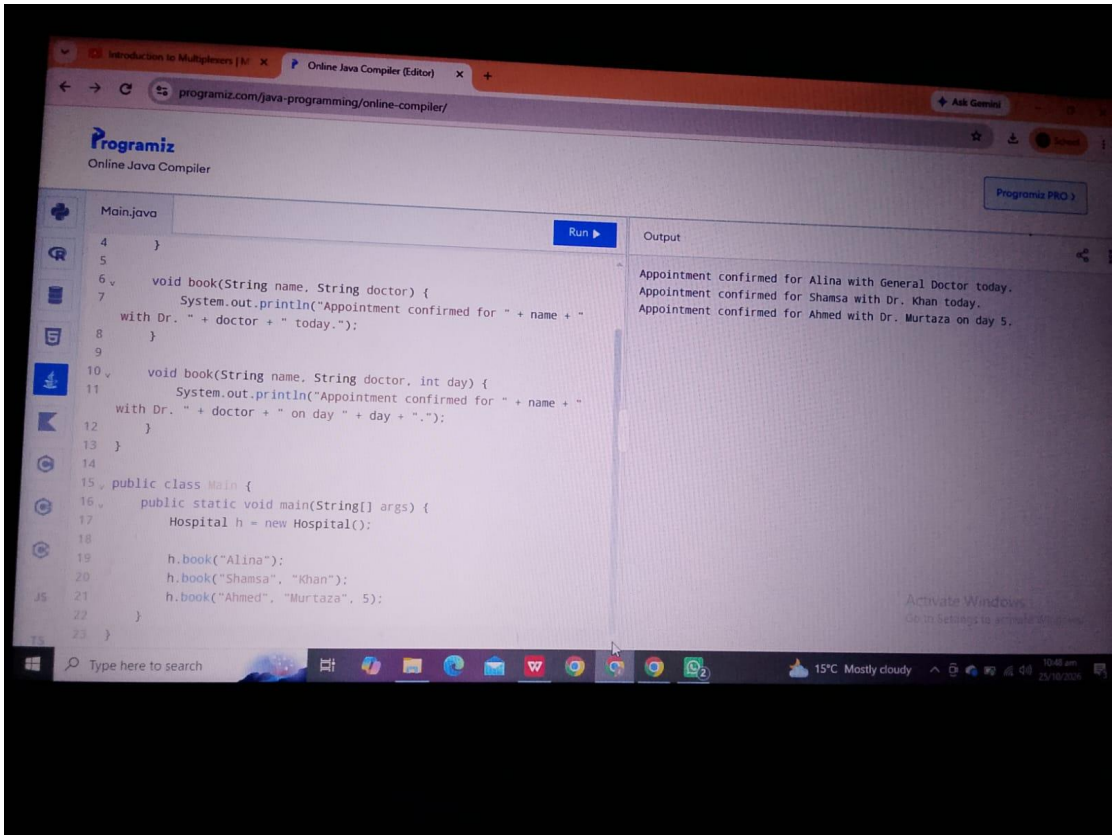
Introduction to Multiplexers | M
Online Java Compiler (Editor)
programiz.com/java-programming/online-compiler/
Ask Gemini
Programiz
Online Java Compiler
Programiz PRO
Main.java
Run
Output
4 }
5
6 void book(String name, String doctor) {
7 System.out.println("Appointment confirmed for " + name + "
with Dr. " + doctor + " today.");
8 }
9
10 void book(String name, String doctor, int day) {
11 System.out.println("Appointment confirmed for " + name + "
with Dr. " + doctor + " on day " + day + ".");
12 }
13 }
14
15 public class Main {
16 public static void main(String[] args) {
17 Hospital h = new Hospital();
18
19 h.book("Alina");
20 h.book("Shamsa", "Khan");
21 h.book("Ahmed", "Murtaza", 5);
22 }
23 }
Appointment confirmed for Alina with General Doctor today.
Appointment confirmed for Shamsa with Dr. Khan today.
Appointment confirmed for Ahmed with Dr. Murtaza on day 5.
Activate Windows
Type here to search
15°C Mostly cloudy

Task 2: Ride Fare Calculator

A ride app charges a different rate per kilometre for each vehicle. Create a base class Ride with a method calculate Fare(int km) that charges 25 per km. Then create subclass Bike (20 per km), Car (40 per km) and Rickshaw (30 per km), each overriding the method and returning the fare as a double. In main(), store all three in a Ride[] array, loop through it, and print each fare for 10 km.

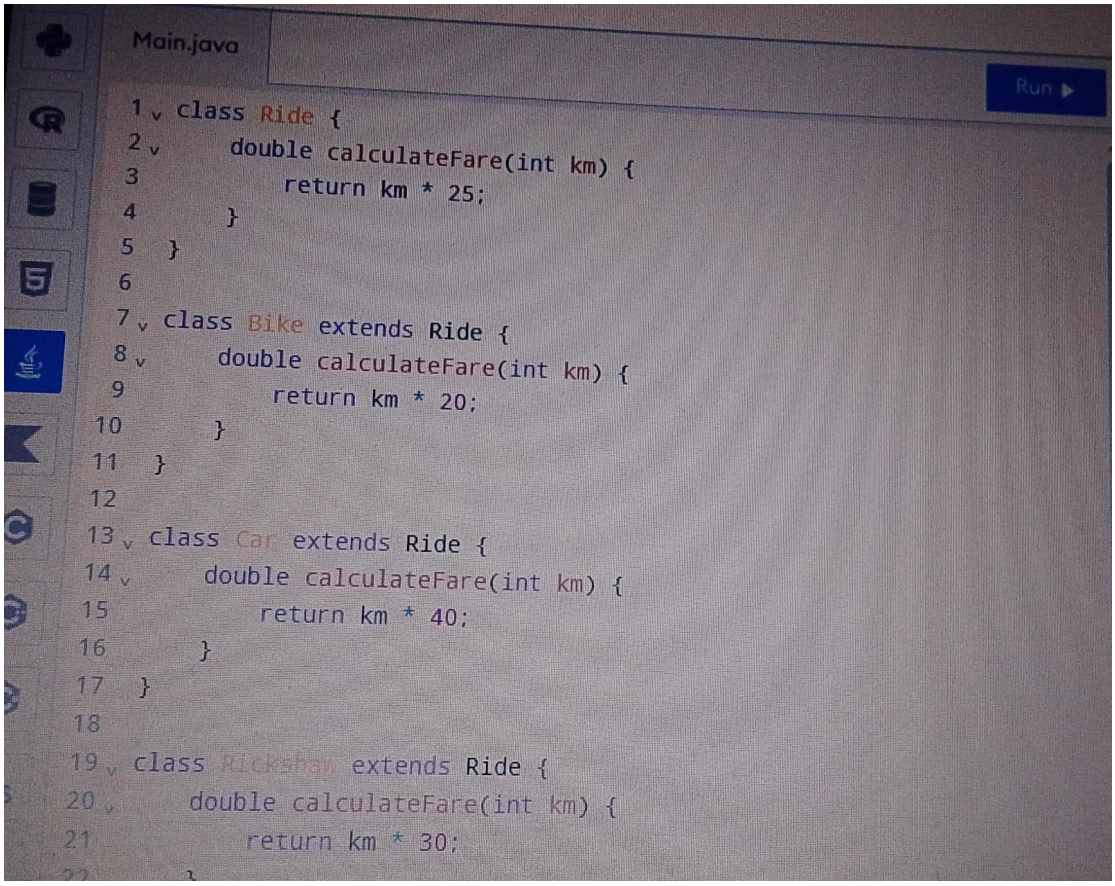

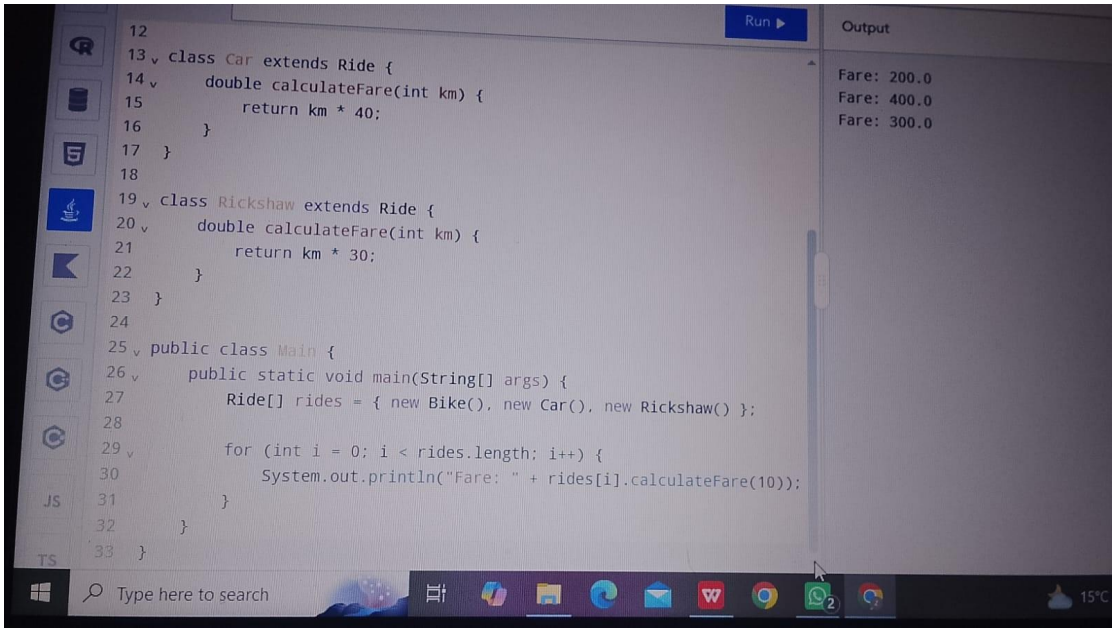

Task 3: University Fee with Scholarship

A university calculates student fees with or without a custom discount percentage. Create a class Fee with two overloaded methods: calculate(double tuition) returns the tuition unchanged, and calculate(double tuition, double percent) returns the tuition minus that percentage. Scholarship students get 20% off by default, so create a subclass ScholarshipFee that overrides only the one-parameter method. In main(), use a tuition of 50000 and test both classes with both methods.

