


# Software Architecture

Trust-aware BRPL integration (where trust affects routing decisions)

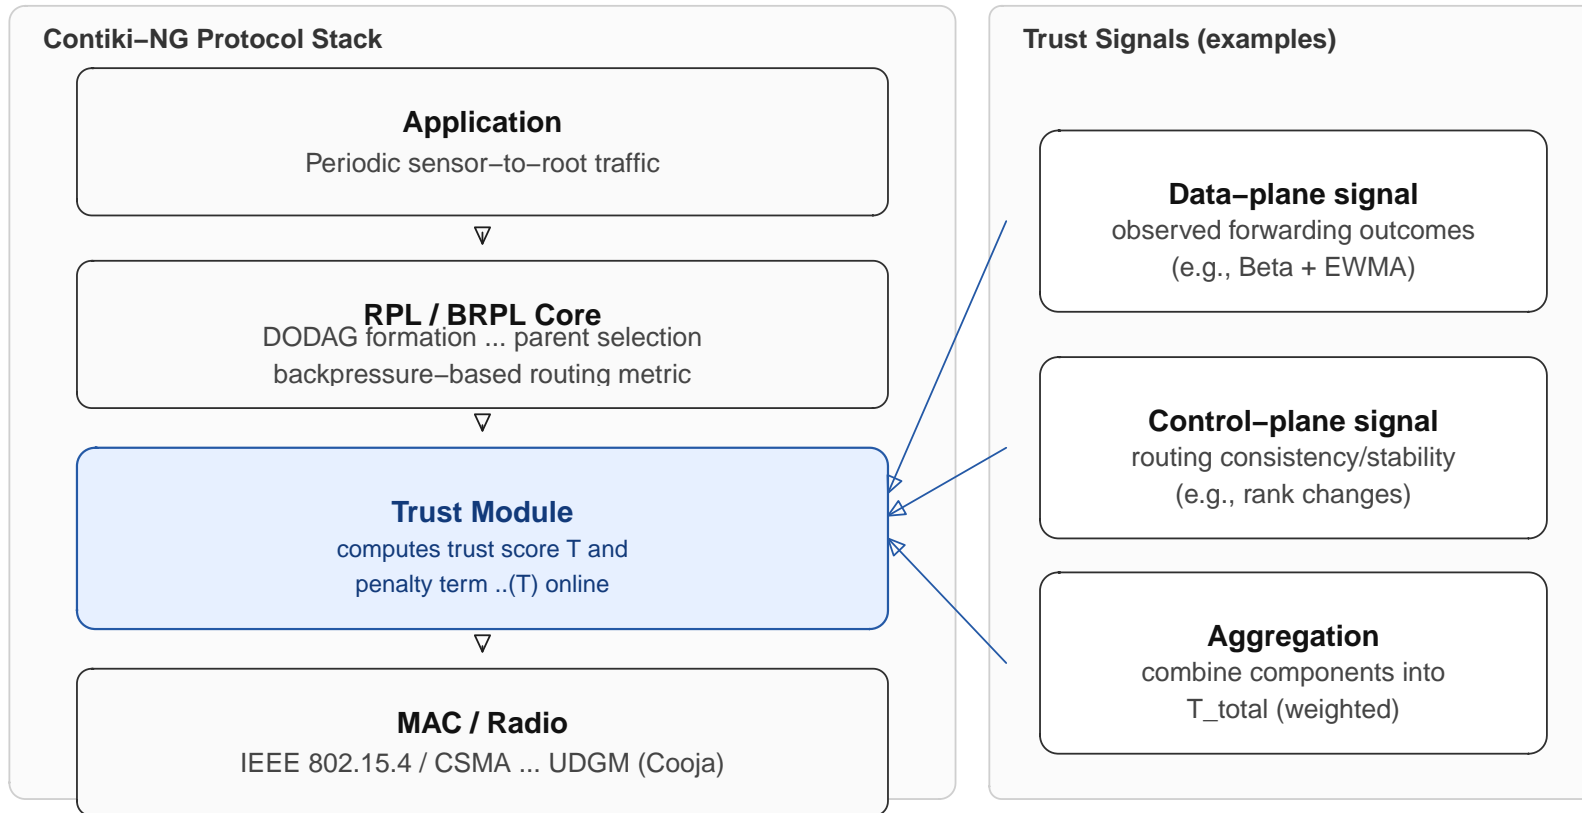

Routing uses  $..(T)$  online inside the BRPL metric. If the implementation relies only on locally available signals, no extra protocol messages are introduced beyond baseline RPL/BRPL control traffic.