




# Presentation and Interaction

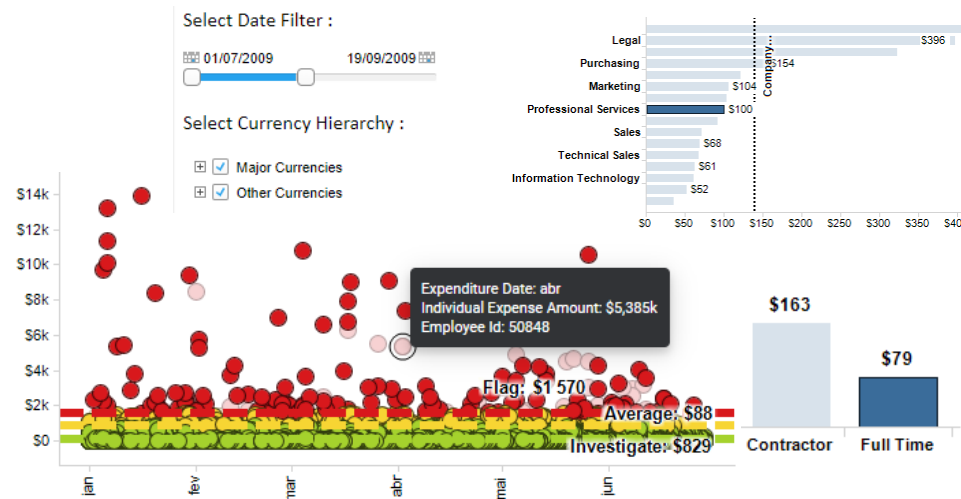

<https://www.tibco.com/products/tibco-spotfire/learn/demos>


# The presentation issue

- The issue of **layout** is important due to the limited screen real estate, as well as users' cognitive limitations
- Irrespective of how data may be represented decisions have to be made:

- **how the representation is to be displayed**
- **When and how it is to be displayed**

(Spence, 2014)

- Links to representation and interaction are important

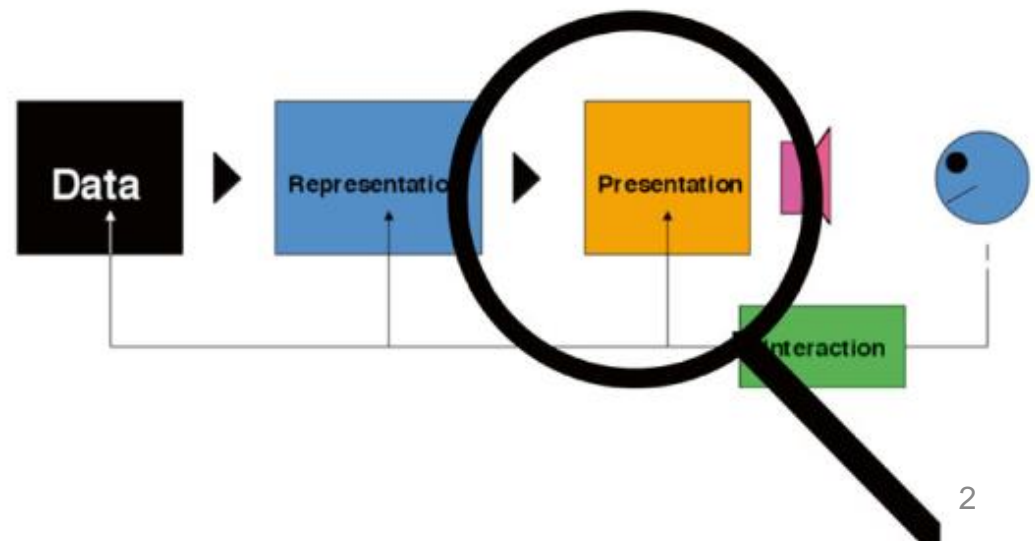

## To help overcome space limitations

- Scrolling
- Overview + detail
- Distortion
- Suppression
- Zoom and pan

- **Scrolling** consists in moving displayed text or graphics on a screen in order to view different parts of them
- an obvious solution when a document is larger than the display area
- A long document can be moved past a “window”
- Often it is not a satisfactory solution
- Scrolling hides most of a document:  
there is not a view of context as well as detail

## 7.1 A PROBLEM

Many of us have found ourselves with a report that has to be completed by a deadline, with the result (Figure 7.1) that the information table extended to its 12th page, is covered by piles of papers as well as reports, books, clippings and slides, perhaps with more arranged on the floor and on a couple of chairs. There may even be piles on top of piles. Such a representation of vital information makes a lot of sense; everything relevant is to hand (hopefully!) and, moreover, it is very visible. It acts as a reminder (Bolt, 1984, page 2) of what might be relevant at any particular juncture, possibly triggering a subsequent action (Suchman, 1987). In this environment I can concentrate on creative tasks rather than on organisation.

Despite the availability of high-resolution displays and powerful workstations I still write most of my reports in this way. Why? Because the display area provided by the typical workstation is small relative to support, visibly, all the resources that are relevant to my composition.

## 7.2 THE PRESENTATION PROBLEM

I am not alone in the sense of having too much data to fit onto a small screen. A very large and expensive screen, for example, would be needed to display the London Underground map in sufficient detail (Figure 1.1), and it would be difficult or impossible to present, on a normal display, the complete organisation chart of IBM or ICI. Moreover, the recent emergence of small and mobile information and communication devices such as PDAs and wearable displays has added additional difficulties in representing data in a solution to the 'too much data, too little display' problem.

### 7.2.1 Scrolling

An obvious solution is to scroll the data in to and out of the visible area. In other words, to provide a means whereby a long document can be moved past a window until it reaches the required 'page' (Figure 7.2). This mechanism is widely used, but comes with many penalties. One relates to the 'Where am


— or was it 5.6? All I can do is open the scrolling mechanism and look out for the figure I need, albeit assisted by various cues such as the page number indicated in the scrolling mechanism. With a scrolling mechanism most of a document is hidden from view. I have the same problem when using a microfilm reader, with the addition of complication that if I move the tray to the left, the image moves to the right. A similar difficulty applies to my use of the famous London 'A to Z' street directory. I'm driving along a road that goes off the edge of the page, so I desperately need what ever page contains the continuation of that road (and quickly!). Even if I get it, I will typically have trouble locating the same road on the new page. These and other similar problems can be ameliorated by the provision of context. Much of this chapter, in fact, is concerned with deciding how to provide context

- Two separate views of detail and of context can be combined in a **overview + detail** view helps with the **focus + context** problem

“You are here”



## Another example

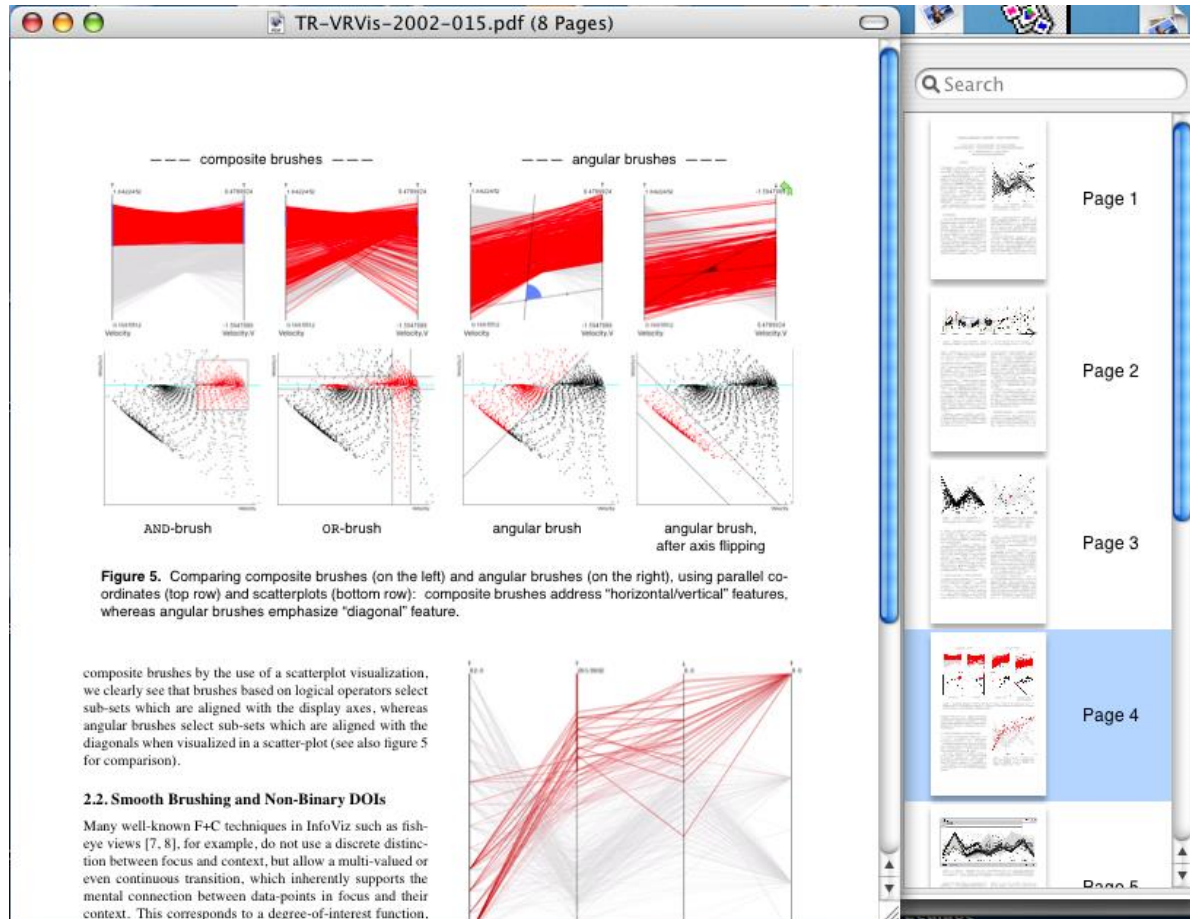

Detail plus Overview. Miniatures of pages of a pdf document provide useful context while attention is paid to detail of one page (Spence, 2007)


- **Distortion** offers a way of solving the **focus + context** problem

- The **bifocal display** (Spence and Apperley, 1982) uses distortion and is based on a simple metaphor


- Part of an information space can be viewed in detail; a bird's eye view is provided of the remainder

Original videos:


<http://www.youtube.com/watch?v=DaF5brddpJw>  
<http://www.youtube.com/watch?v=gNTQaH8MM98&NR=1>



(a) An information space containing documents, emails, etc.

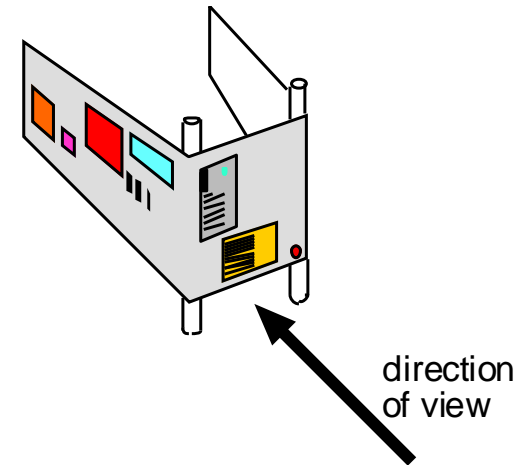


(b) The same space wrapped around two uprights.

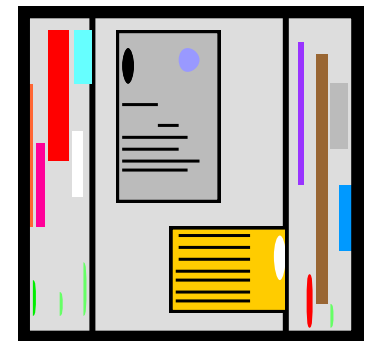

(c) Appearance of the information space when viewed from an appropriate direction

The **Bifocal Display** allows a large data space to be viewed as a whole, while simultaneously a portion is seen in detail.


The detail is seen in the context of the overview, with continuity across the boundaries, rather than existing in a disjoint window

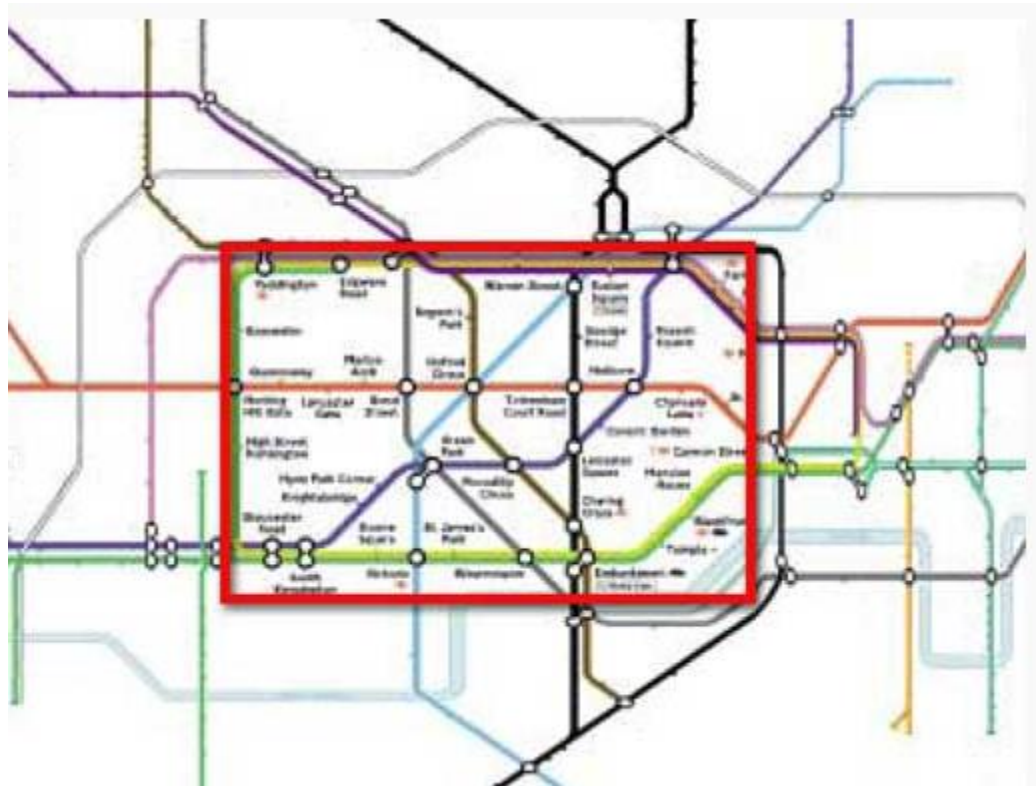

<https://www.interaction-design.org/literature/book/the-encyclopedia-of-human-computer-interaction-2nd-ed/bifocal-display>



## Another example

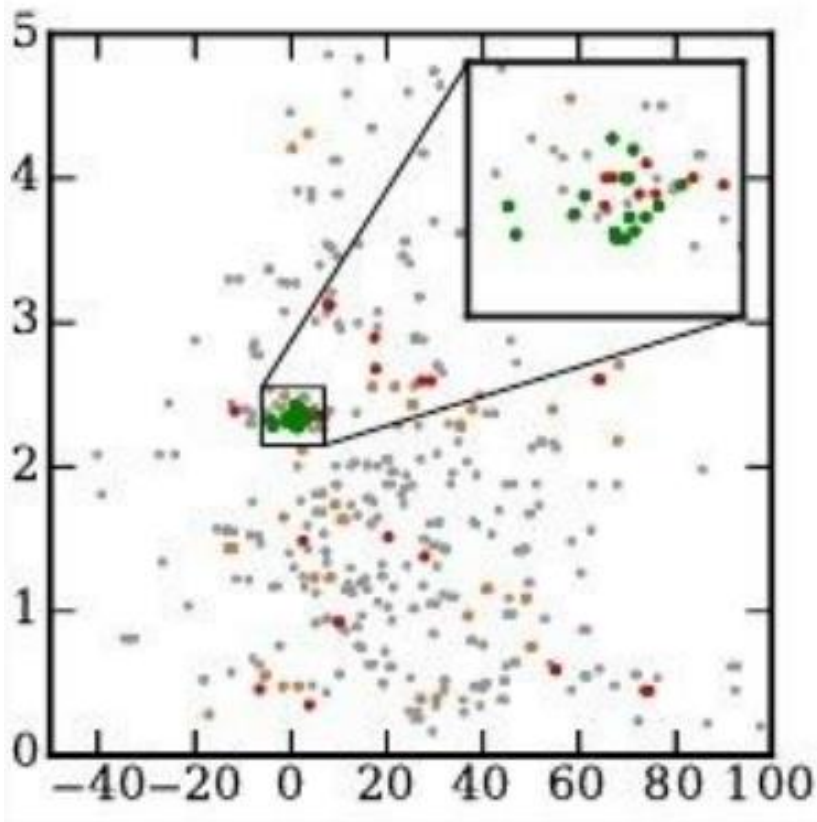


(Tao et al., 2021)

- The use of a “magnifying glass” helps minimize the **focus + context** problem
- a small region of interest is shown amplified and the context is maintained


[Kyrix-S: Authoring Scalable Scatterplot Visualizations of Big Data | IEEE TVCG](#)

Example: a small region of interest a context map can be flexibly positioned to provide a magnified view

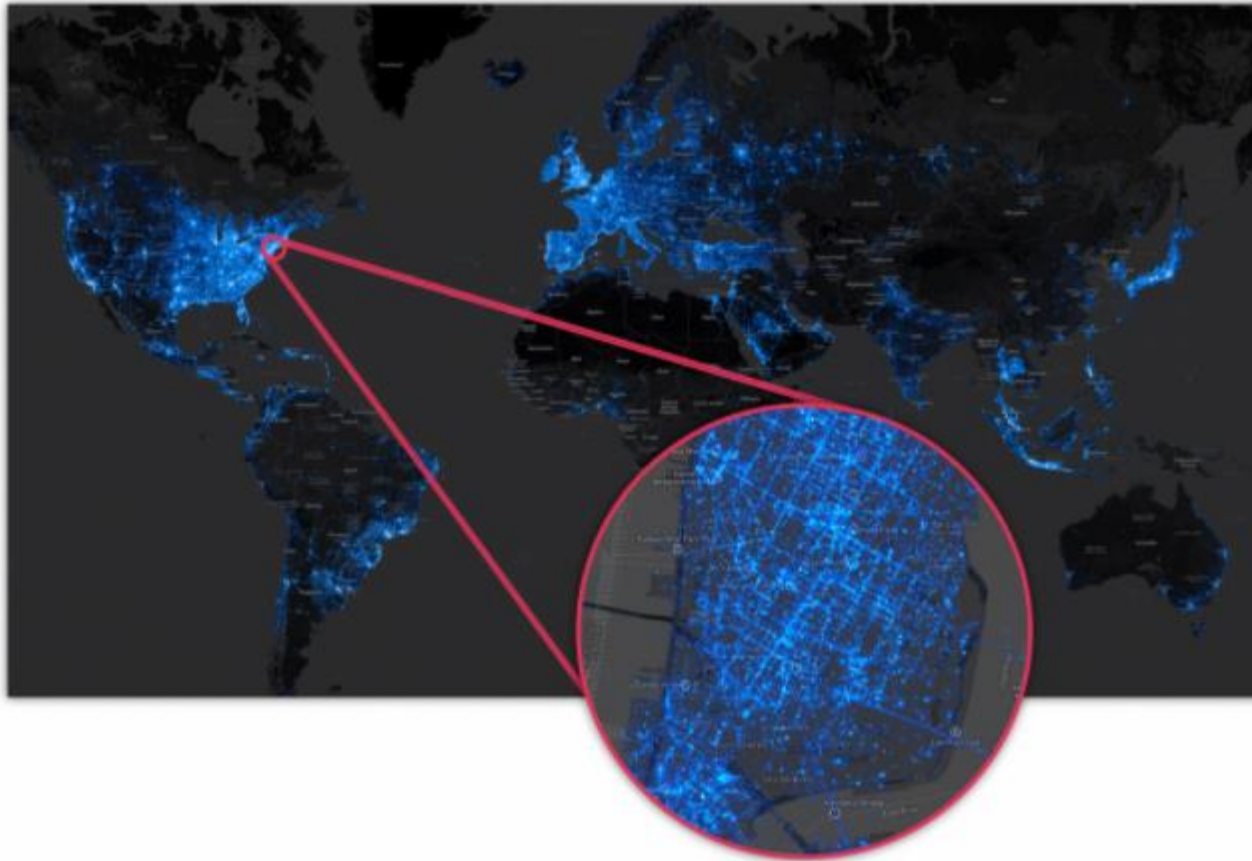




<https://databricks.com/blog/2015/03/19/pantera-big-data-visualization-leverages-the-power-of-the-databricks-cloud.html>

## Suppression is used in Filtering

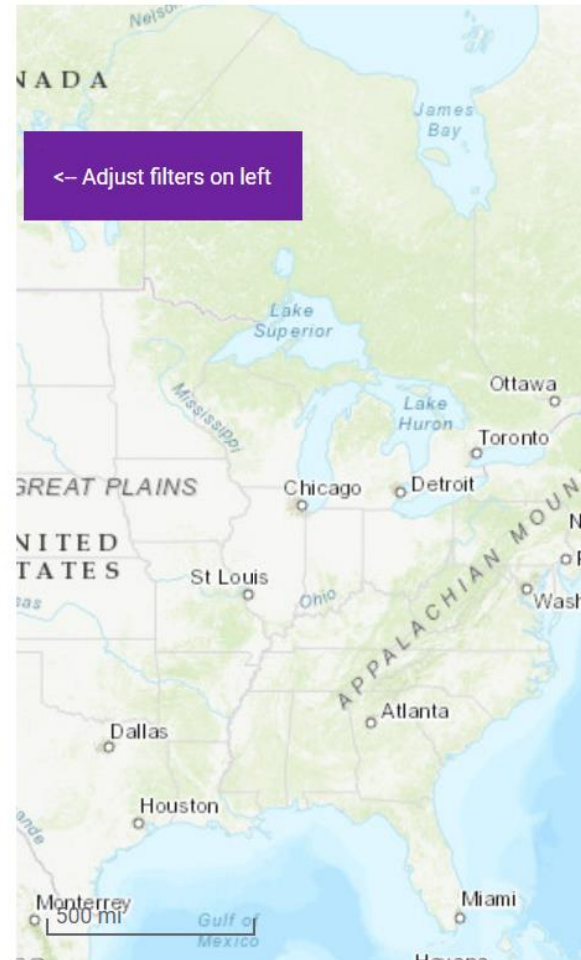

Filtering may be done in different ways through the User Interface (sliders, check boxes, ...)


Suppression finds valuable application in the Magic Lens (Stone et al., 1994)

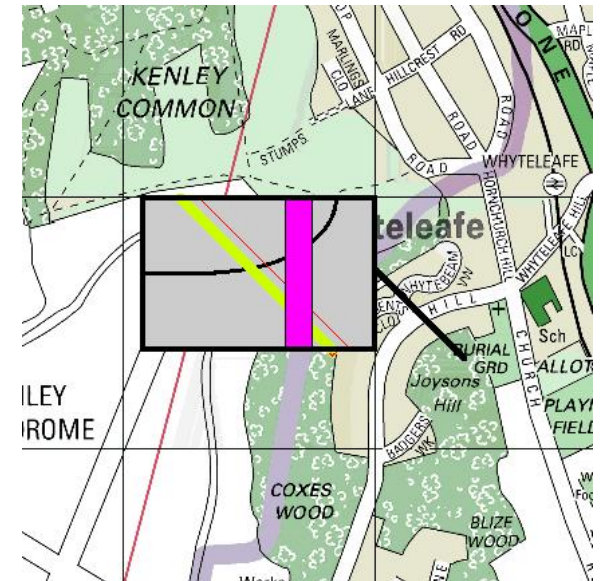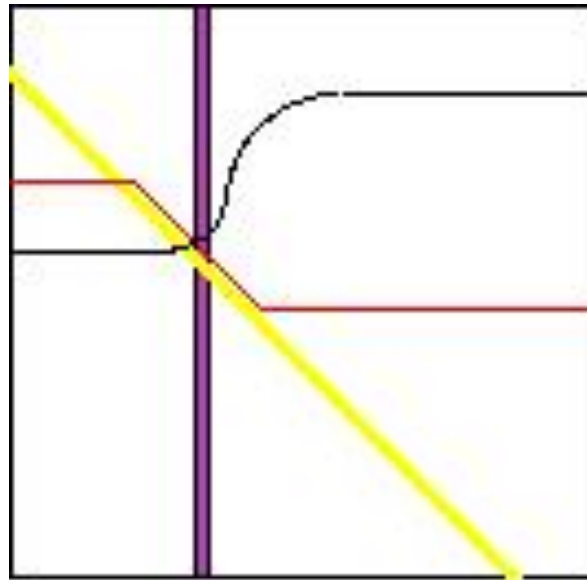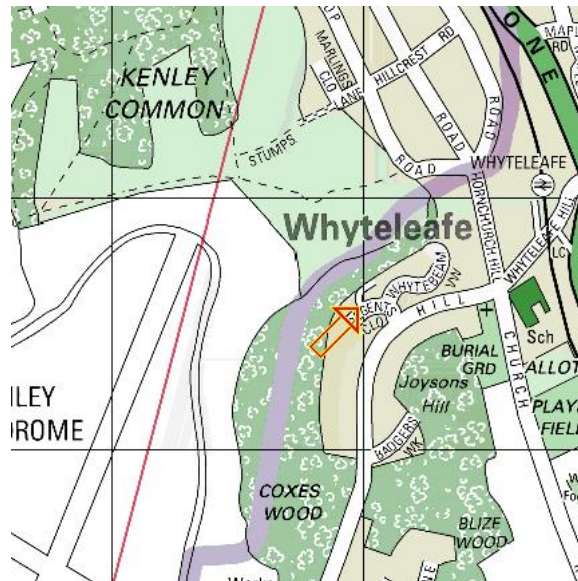


Magic Lens:

- (a) shows a conventional map of an area,
  - (b) shows the location of services (gas, water and electricity pipes)
  - (c) a (movable) Magic Lens shows services in an area of interest, in context
- (Spence, 2007)


- The **magic lens** offers another way of solving the **focus + context** problem

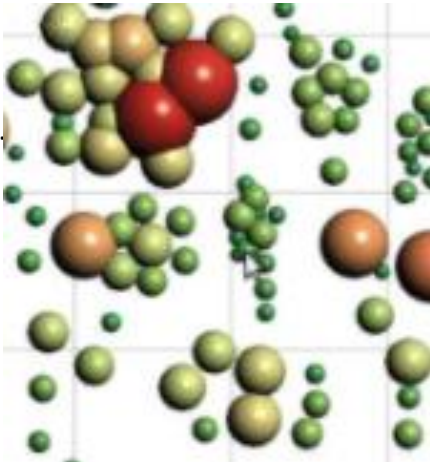

Original view

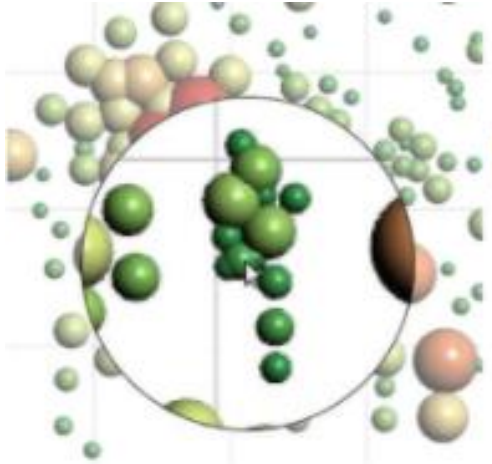

Simple  
magnification

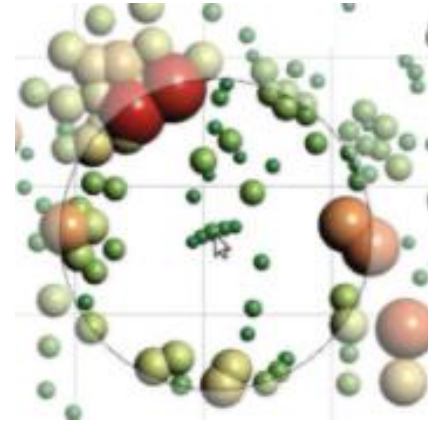


Fish-eye  
distortion

(Tominski et al., 2016)


[Interactive Lenses for Visualization: An Extended Survey - Tominski - 2017 - Computer Graphics Forum](#)



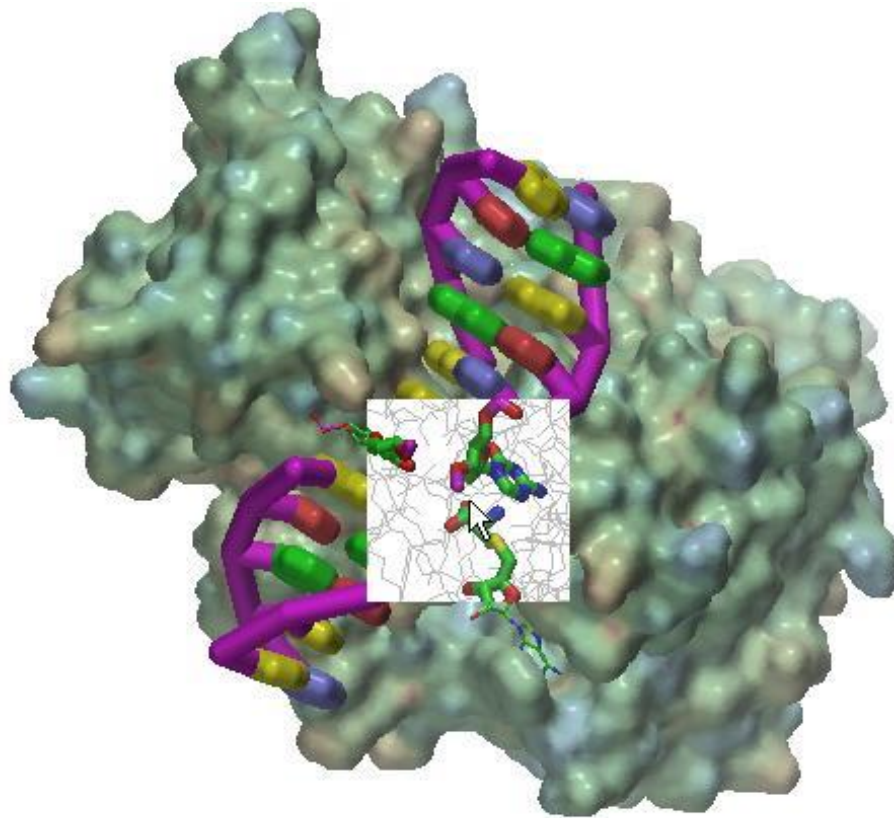

A molecular surface of the protein transferase colored by electrostatic potential bound to DNA shown as a schematic. The magic lens window allows a view of the atomic structure bonding to be shown, with the bound ligand structure highlighted as cylinders, thereby providing a view inside the protein ([Spence, 2007](#))

## The Magic Lens using Augmented Reality for Data Visualization

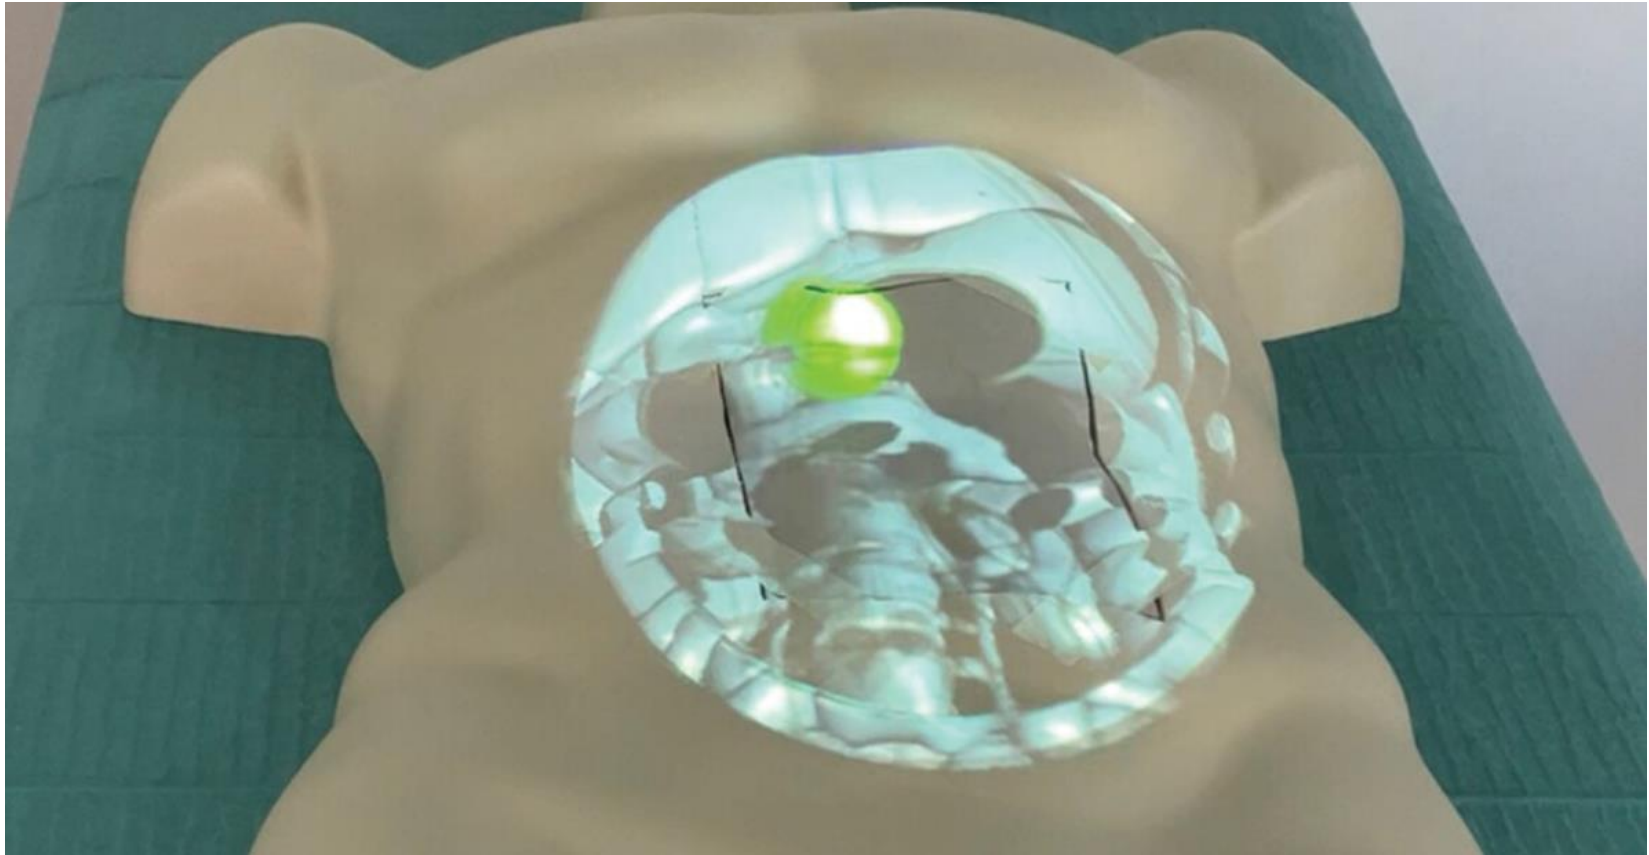



L Schwenderling, et al., "Activation modes for gesture-based interaction with a magic lens in AR anatomy visualisation," *Computer Methods in Biomechanics and Biomedical Engineering: Imaging & Visualization*, vol. 11, n. 4, pp. 1243-1250, 2023

<https://www.tandfonline.com/doi/full/10.1080/21681163.2022.2157749>

The **Table Lens** is method to dynamically explore large amounts of tabular data

The Table Lens  
(Rao and Card, 1995)

- without distortion;
- with distortion (expansion) to show names

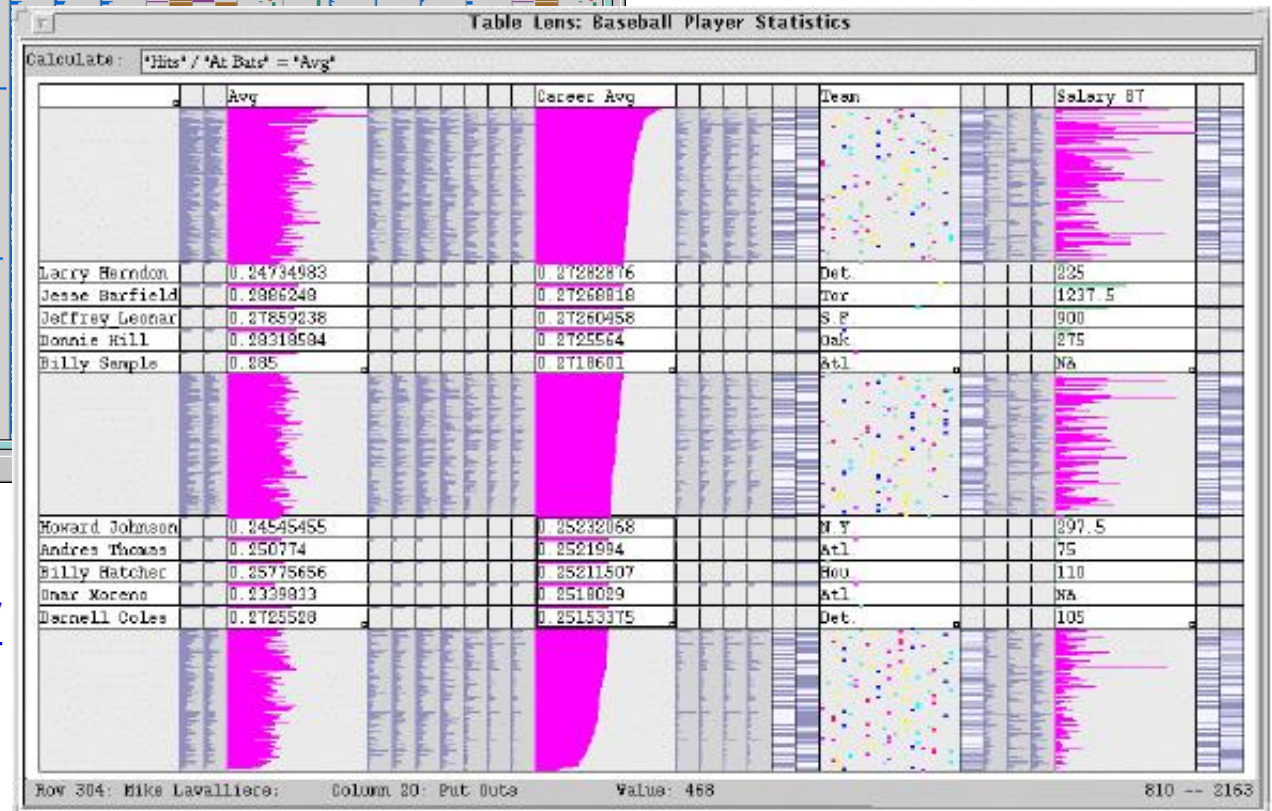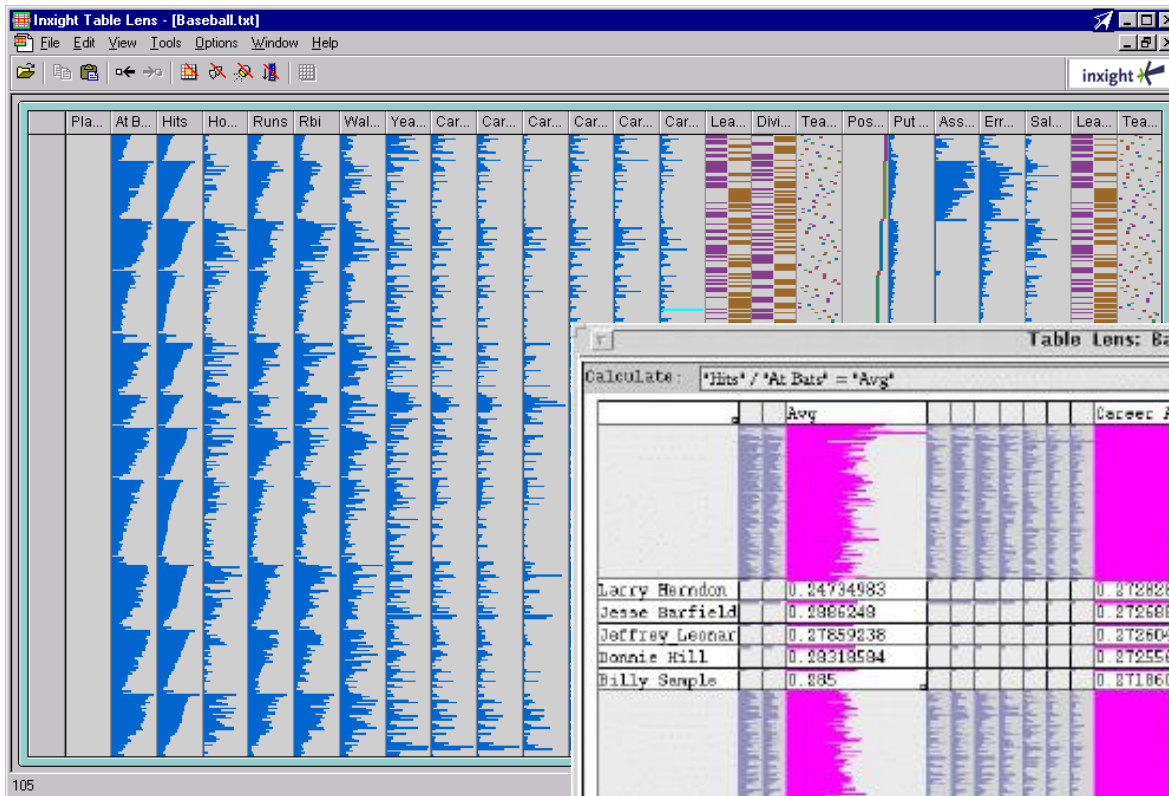


[https://www.youtube.com/watch?v=Cz0OvnR\\_aoy](https://www.youtube.com/watch?v=Cz0OvnR_aoy)




- This simple but powerful concept can be generalized
- It is possible to use X and Y distortion

| Mar | April | May | June | July    |   |  |  |  | Aug | Sept | Oct |
|-----|-------|-----|------|---------|---|--|--|--|-----|------|-----|
|     |       |     |      | 11 Sun  | Check slides, notes.<br>Family barbeque   |  |  |  |     |      |     |
|     |       |     |      | 12 Mon  | Fly LA<br>Kathy to airport Model Maker  |  |  |  |     |      |     |
|     |       |     |      | 13 Tue  |   |  |  |  |     |      |     |
|     |       |     |      | 14 Wed  |   |  |  |  |     |      |     |
|     |       |     |      | 15 Thur |   |  |  |  |     |      |     |
|     |       |     |      | 16 Fri  | Flight to SFO<br>Tutorial set-up<br>Tutorial<br>United flight Heathrow<br><br>Printer<br>Color CHs<br>Jane+John<br><br>Call Kathy |  |  |  |     |      |     |
|     |       |     |      | 17 Sat  | Fly LHR Kathy to collect<br>Chapter 2/ see Dave March   |  |  |  |     |      |     |

X-distortion

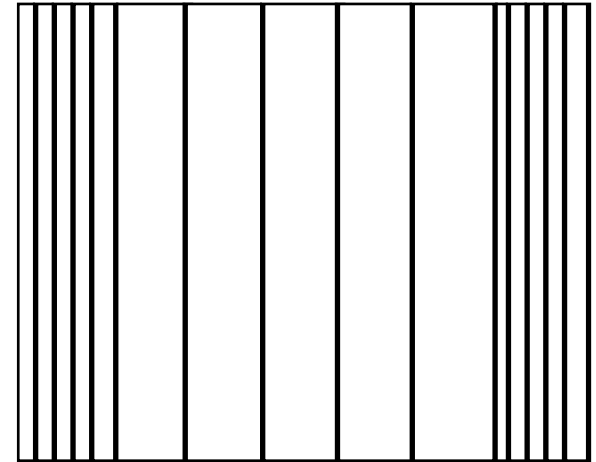


X and Y -distortion

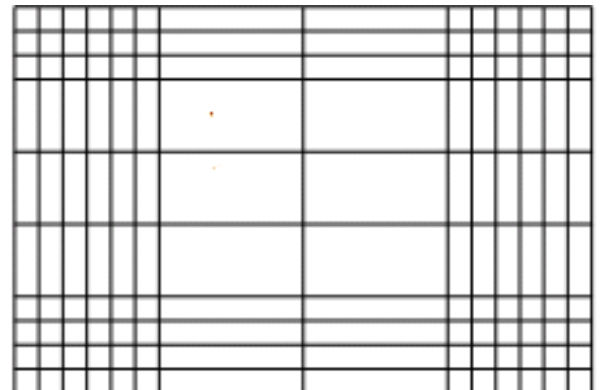

Calendar interface using X and Y distortion  
(Bederson et al., 2003, 2004)

The **Table Lens** is a method to dynamically explore large amounts of tabular data

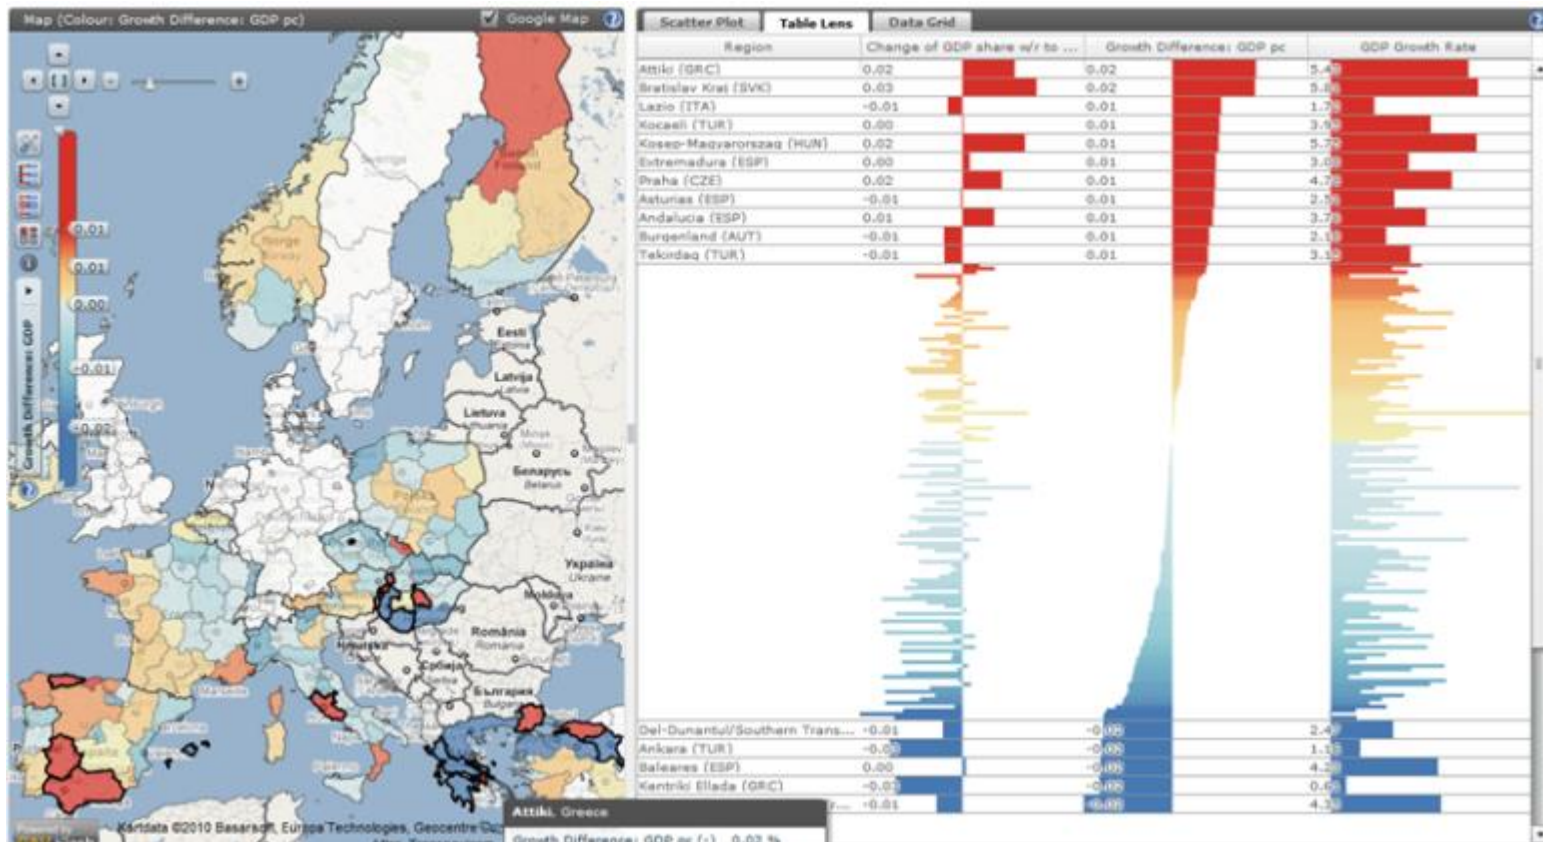

<https://ncva.itn.liu.se/education-geovisual-analytics/table-lens?l=en>


It allows to sort records, focus “zoom” in on interesting areas in the data (to reveal exact numerical information) using “focus + context”

- Furnas proposed a **Degree of Interest** (DoI) to determine which data should be represented and presented and which should be **suppressed**
- The Degree of Interest of any item is expressed as a function of:
  - *A priori importance* (API)
  - **Distance** (D) between that item and the item which is currently the user's focus of interest


Example (Spence, 2007)

Considering only Distance:


1-The organization tree of a company

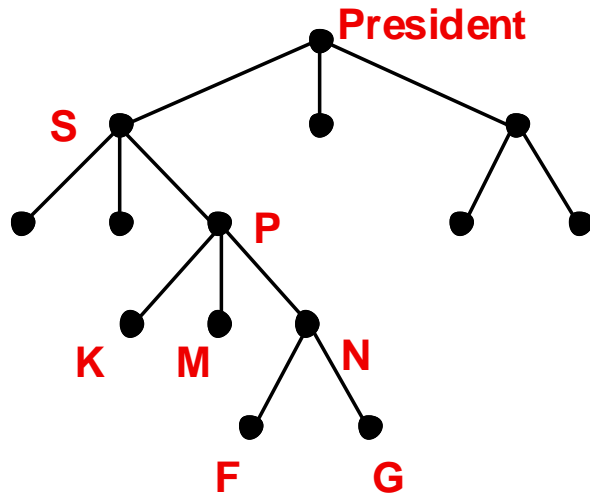


3- The context defined by setting an upper threshold of unity for distance from a focus

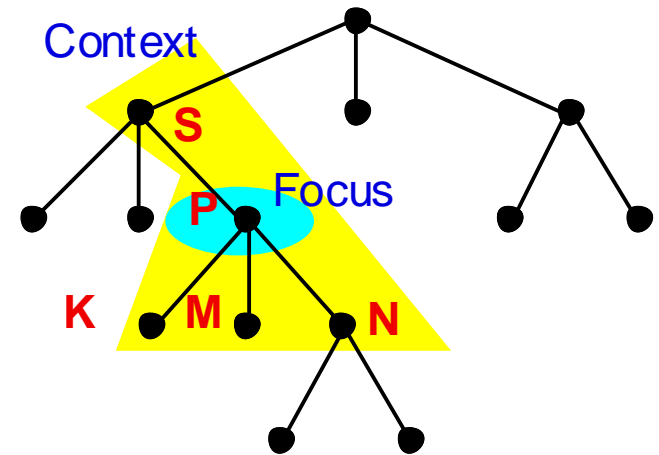

2- Distance 'D' of each node from the focus of attention

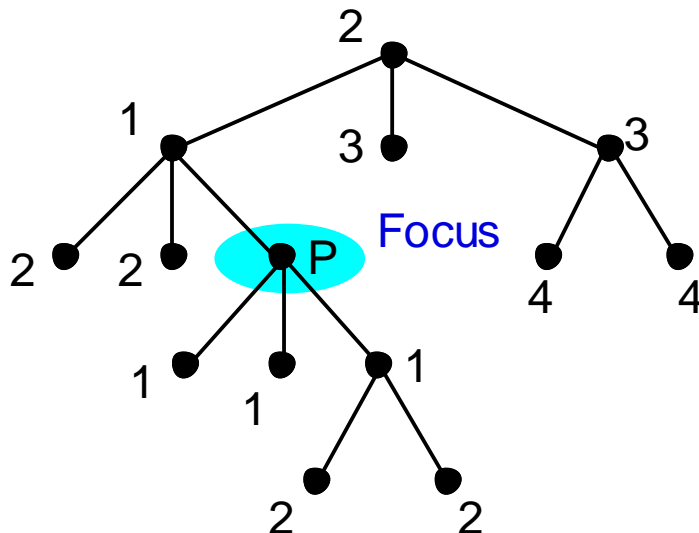


4- Display that might be associated with the focus and context defined

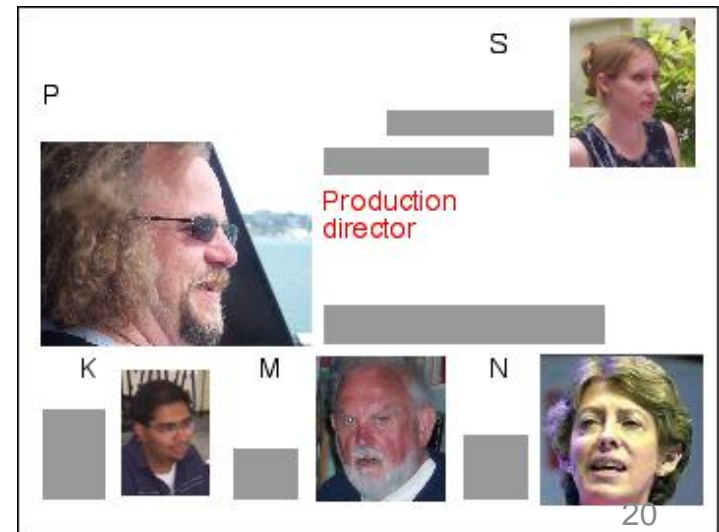


Considering a priori importance:


### Distance to the focus:

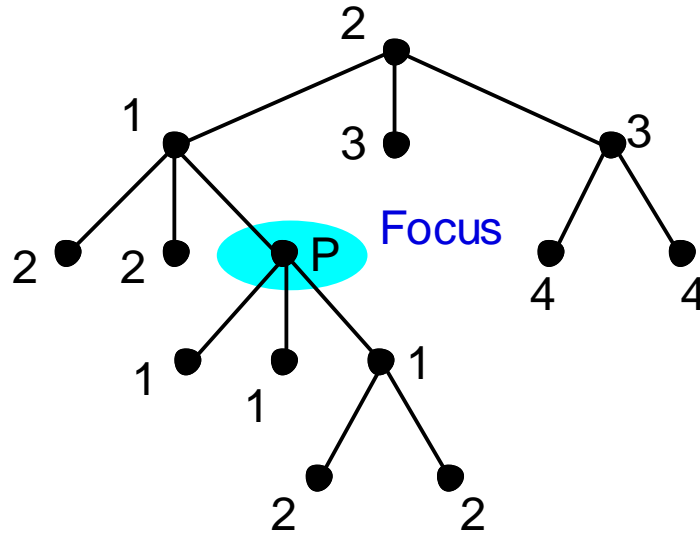

## What is shown/suppressed:

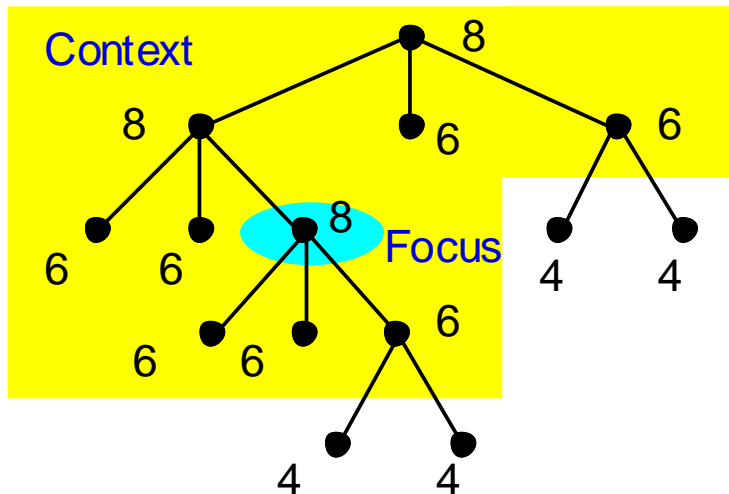

*A priori* importance:

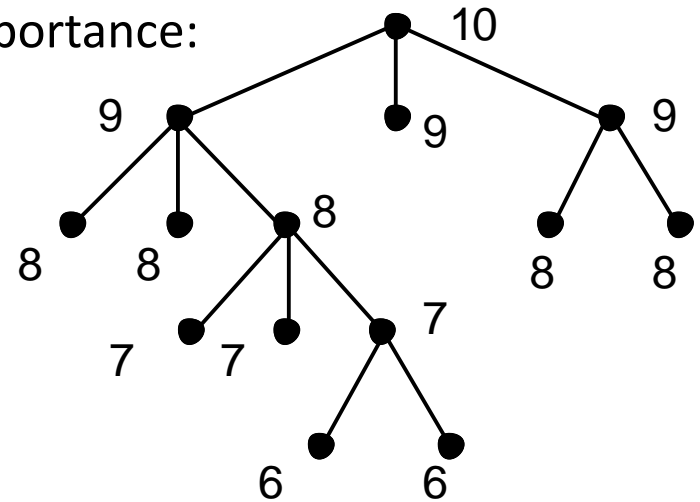


← Nodal values of Degree of Interest:


$$DoI = API - D$$

Setting a lower limit of 6 for DoI identifies the nodes within the shaded region

Example:  
Part of an engineering drawing

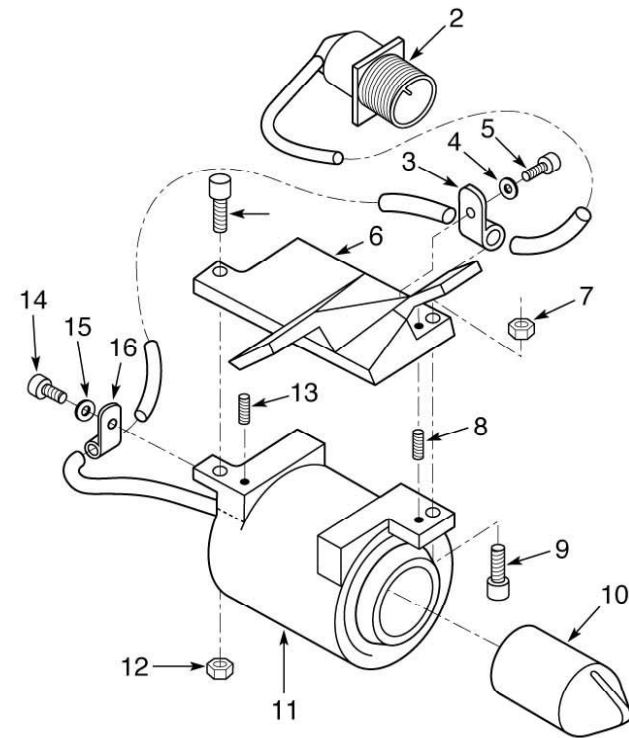


The engineering drawing simplified  
in the context of a suspected fault  
(Spence, 2007)

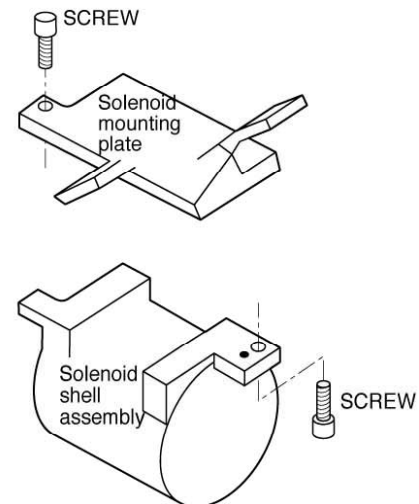

Another example :


- providing both overview and detail on a dynamic citation network is a challenge, and small changes can be drowned out by larger ones
- a degree-of-interest specification by which the user can identify salient changes at the desired scale and importance may help

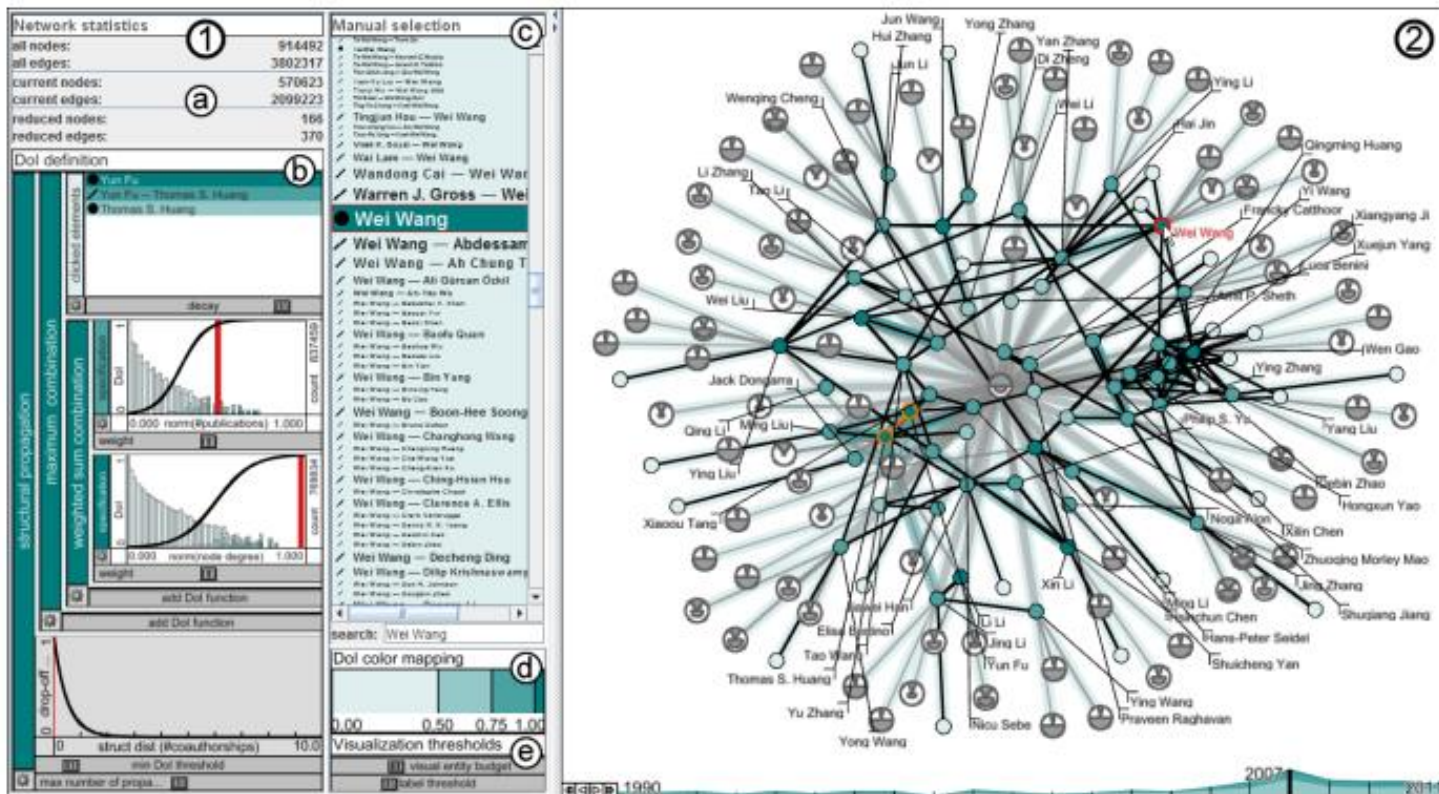

Two main views: (1) the DoI view and (2) the Network view (a snapshot of the DBLP dataset for the year 2007 reduced according to the defined DoI function).


(Abello et al., 2014)



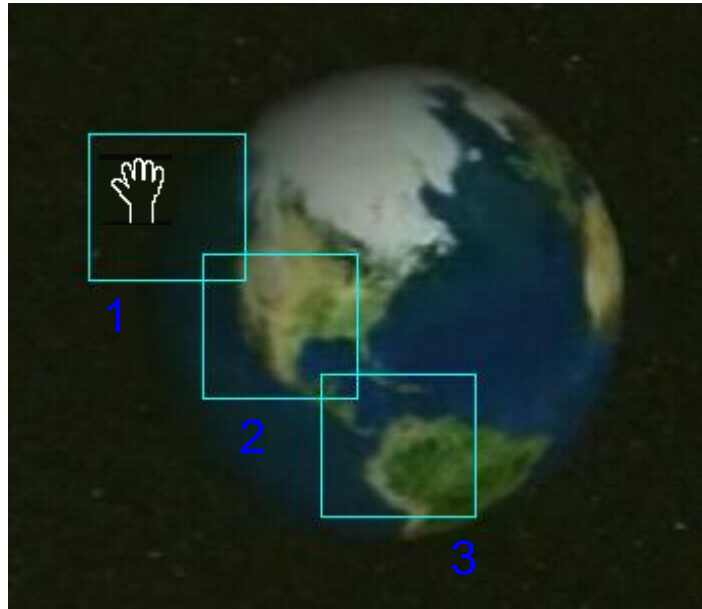


**Panning** is the smooth movement of a viewing frame over a 2D image



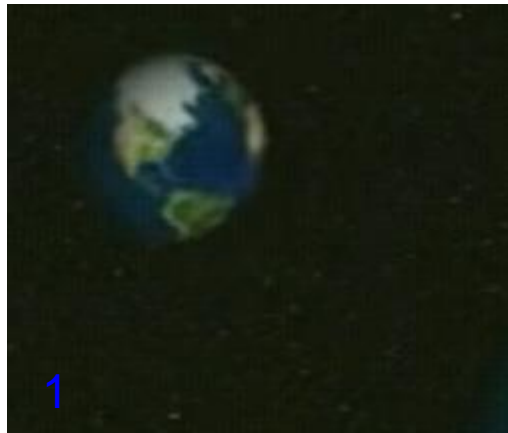

**Zooming** is the increasing magnification of a fraction of an image  
(or *vice versa*)

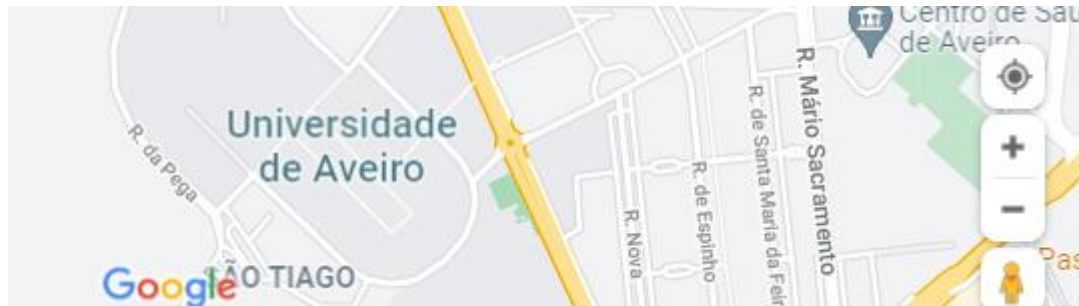


1



2

**Zooming** is the increasing magnification of a fraction of an image (or *vice versa*)  
**Semantic zoom**- more information is shown (not only the previous one magnified)  
[https://infovis-wiki.net/wiki/Semantic\\_Zoom](https://infovis-wiki.net/wiki/Semantic_Zoom)

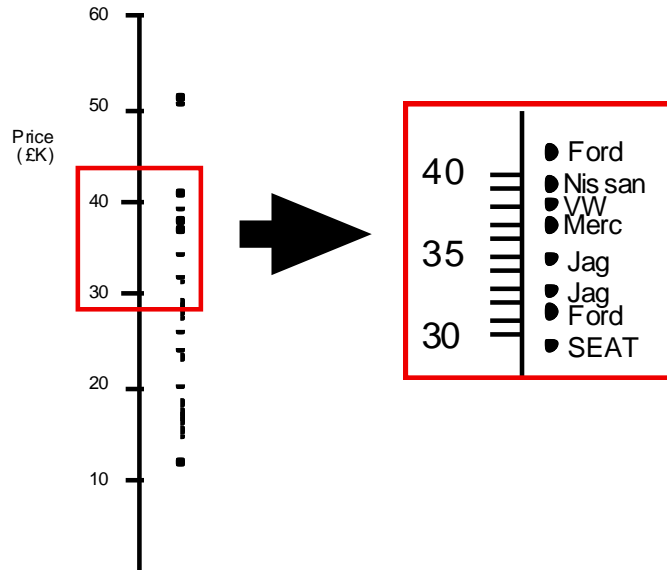

In **semantic zoom** the meaning conveyed by the new view differs from the conveyed by the previous one

(Spence, 2007)



# Visual Information-Seeking Mantra

(Shneiderman, 1996)

“Overview first, zoom and filter, then details-on-demand”


Few, S., The Surest Path to Visual Discovery

[https://www.perceptualedge.com/articles/b-eye/path\\_to\\_visual\\_discovery.pdf](https://www.perceptualedge.com/articles/b-eye/path_to_visual_discovery.pdf)

Not always... (some domain experts operate under a Details-first model, not Overview-first)

# Annotation


- Is about creating extra layers of data detail through interactive events such as hovering or clicking
- This is particularly useful to reveal actual data values or extra detail about a given category or event
- By having the backup of absolute data accuracy through the values, allows using a more creative visual representation
- It's almost like having a “perceptual safety net” (Kirk, 2019)

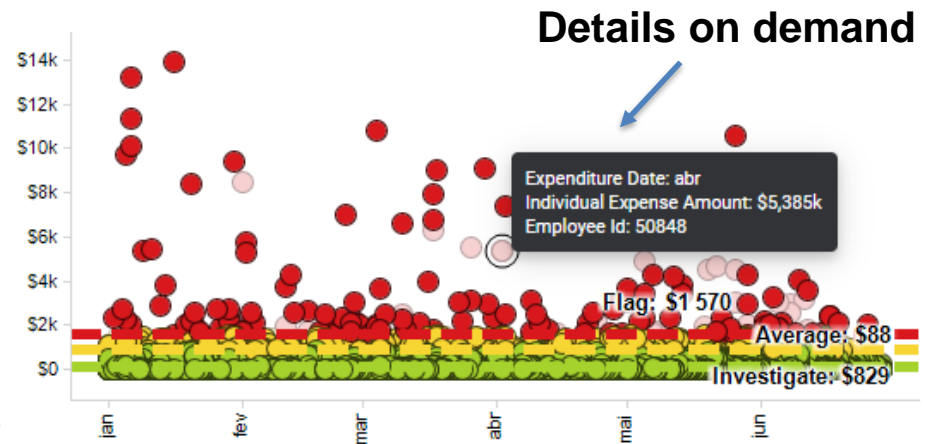

## World Energy Survey Analysis



This analysis is based upon historical data for energy consumption and production in over 65 countries worldwide from 1965 through 2010. Use the following pages to explore the data and explore the following questions:

- ✓ How has world energy consumption grown and changed over the last 45 years?
- ✓ How does energy consumption compare across countries?

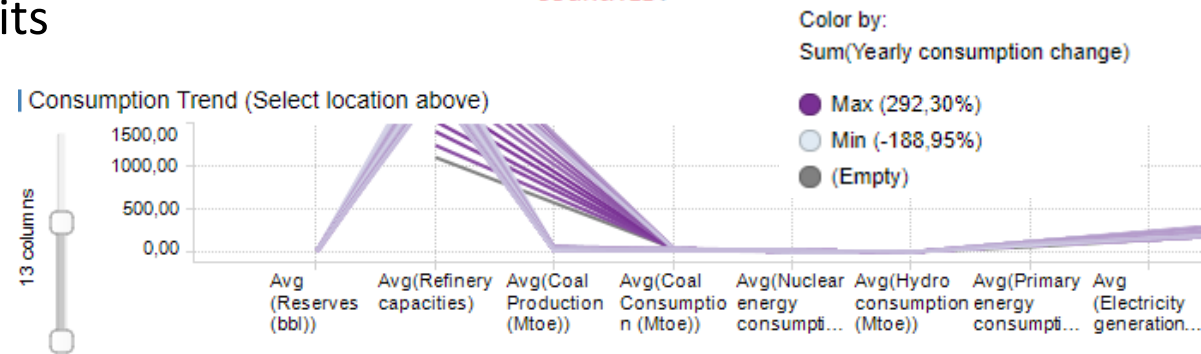

[https://medium.com/@Elijah\\_Meeks/making-annotations-first-class-citizens-in-data-visualization-21db6383d3fe](https://medium.com/@Elijah_Meeks/making-annotations-first-class-citizens-in-data-visualization-21db6383d3fe)

<https://www.spotfire.com/demos>

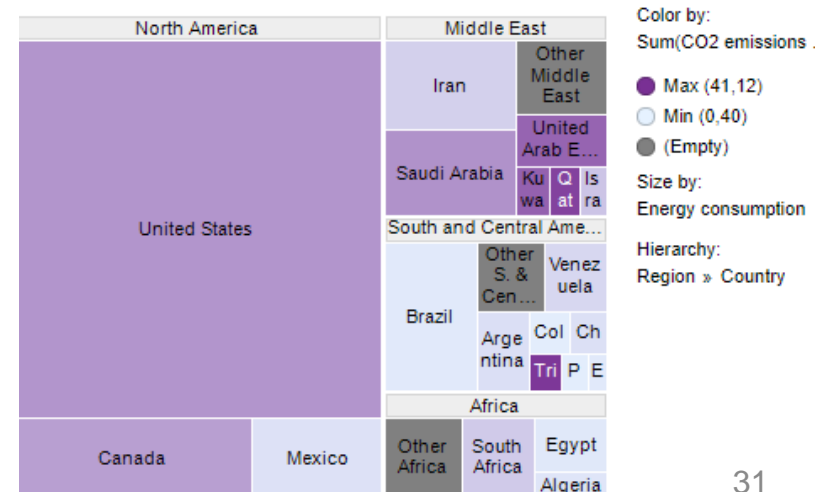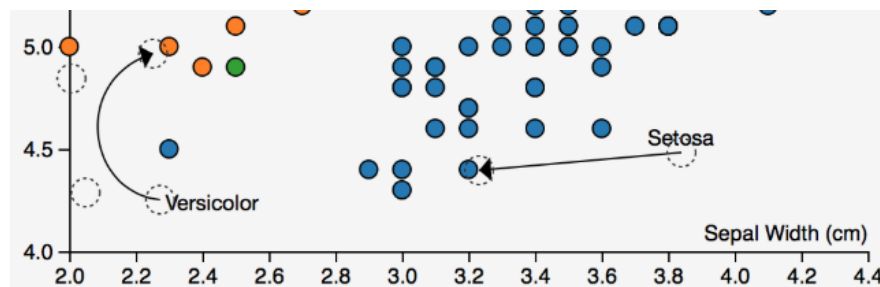

# Creating Interaction

Enhancements in technology over the past decade have created incredible opportunities to construct powerful interactive visualizations

The development of an interactive design requires technical capabilities

Technical constraints should be pondered:

- as platform compatibility,
- data loading speed,
- server capacity
- ...

**If not correctly tackled the usefulness and UX is compromised**

# Creating Interaction


- When the complexity of the data is incompatible with a static portrayal, interaction is vital
- Careful consideration of the motivation and intention is still needed; specifically: what functional experience is the goal of the design?
  - exploratory,
  - explanatory,
  - or maybe a combined design?
- Different features and functions should be considered:
  - Manipulating variables and parameters (e.g. select, filter, modify, sort, ...)
  - Adjusting the view
  - Annotating details
  - Animation



## Manipulating variables and parameters

- The ability to **select**, **filter**, **exclude**, or **modify** certain variables is a valuable way of letting the user interact with different slices of the data
- **Grouping** and **sorting** options are common for extracting new insights
- You can also modify a variable using a slider to see changes across numerous values of the variable
- **Brushing** —highlighting a set of data marks—is a powerful way of focusing in on a subset view the presented data
- **Linking** - user interactions in one visualization are applied to others; linked and brushing is one of the most powerful interactive techniques for visual data exploration

## Manipulating variables and parameters (e.g. select, filter, modify, sort, ...)




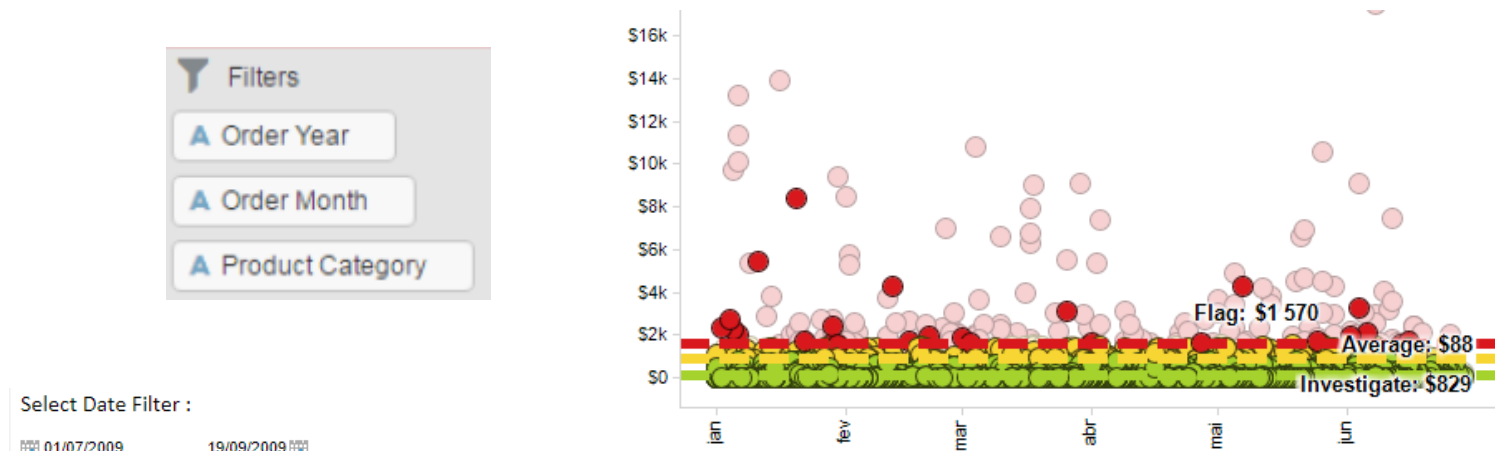


Select Date Filter :

01/07/2009 19/09/2009

Select Currency Hierarchy :

- ☒ Major Currencies
  - ☒ Other Currencies

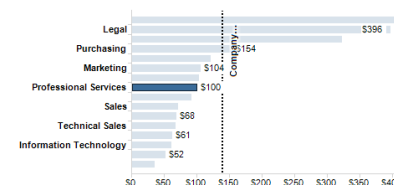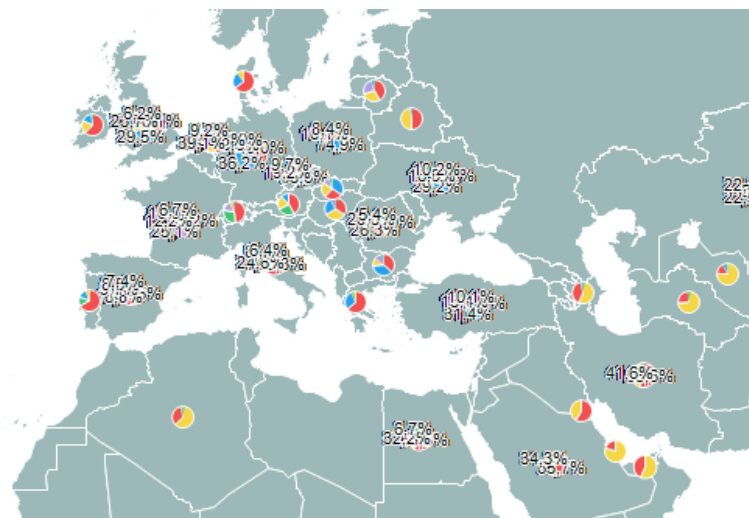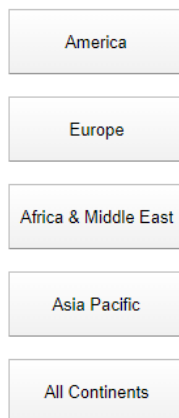**select**

## Linking and brushing



## sort

## Reducing the complexity




- Is important to help users better understand the data (in static or interactive solutions)
- Different ways to do it, may be organized:

|          |            |
|----------|------------|
| – Filter | Items      |
|          | Attributes |

|             |              |
|-------------|--------------|
| – Aggregate | Items        |
|             | Spatial data |
|             | Attributes   |

- Filtering items

(just ignoring part of the items)

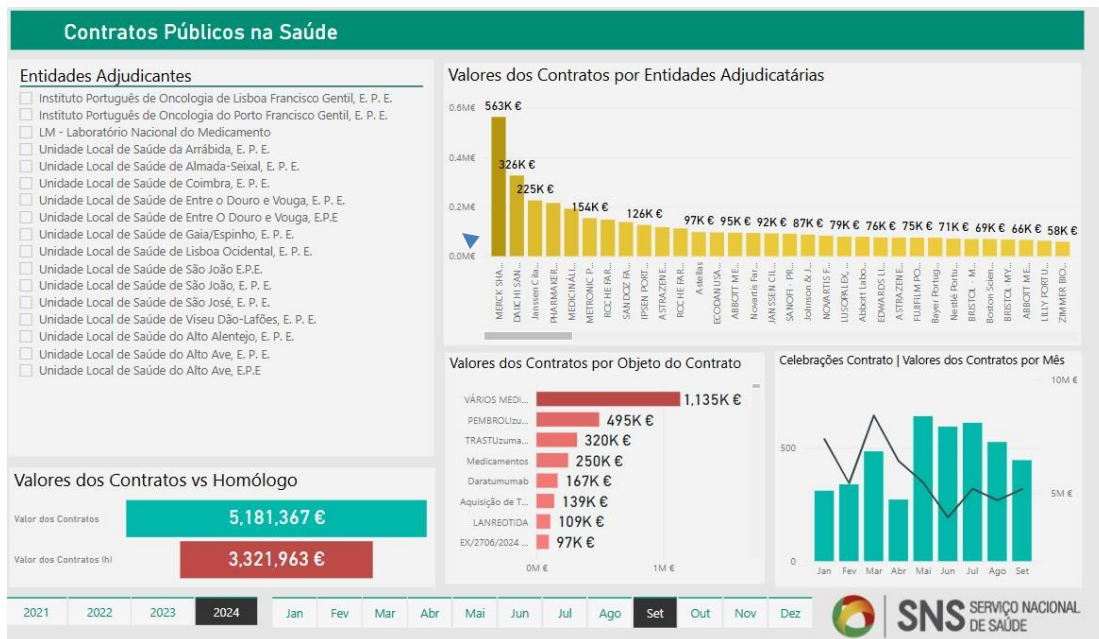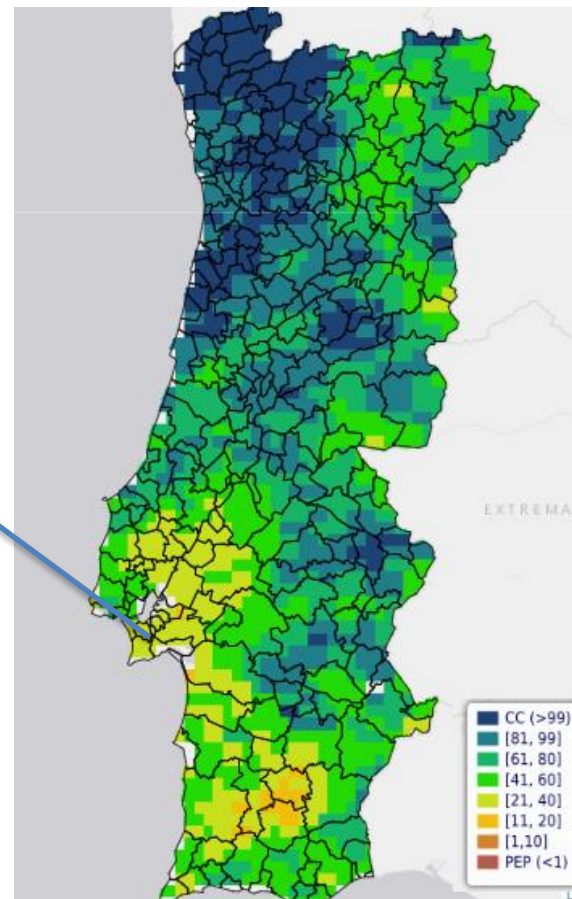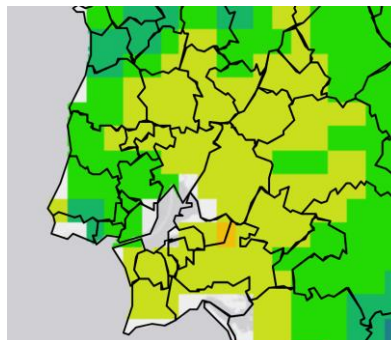

IPMA - Ground percentage of water

Monitoring SNS – SNS

- Filtering attributes


ignoring part of the attributes/dimensions:

Slice

Cut


Easier to understand in spatial data

But also interesting for abstract data

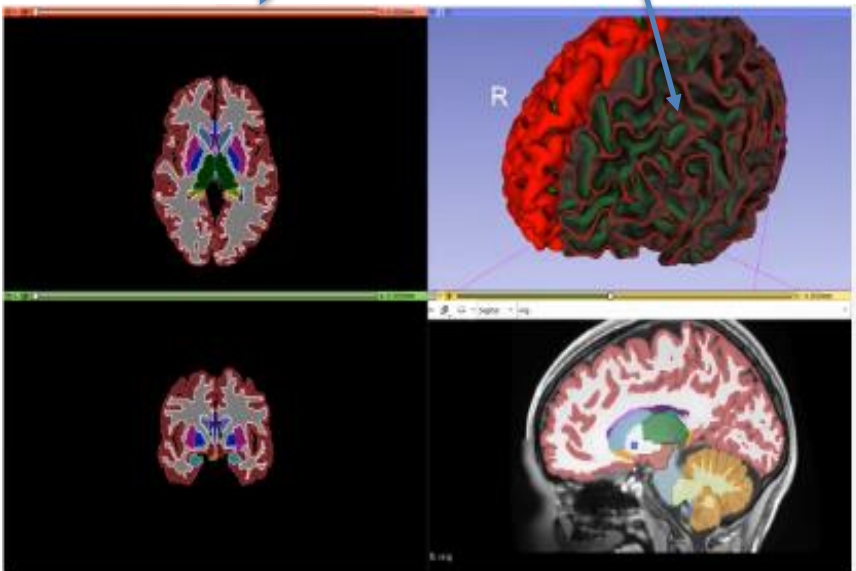

<https://www.slicer.org/>

- Aggregating items and spatial data



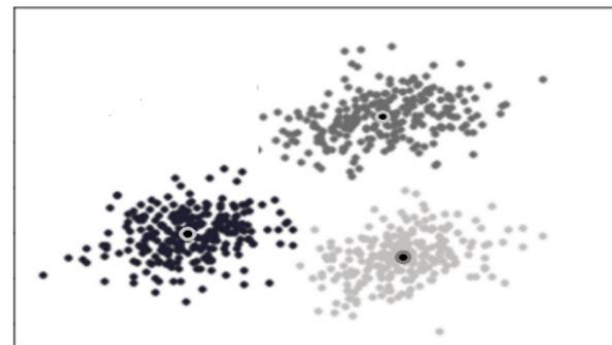


Several items are replaced by just one :

Histograms

Boxplots

Clustering ...

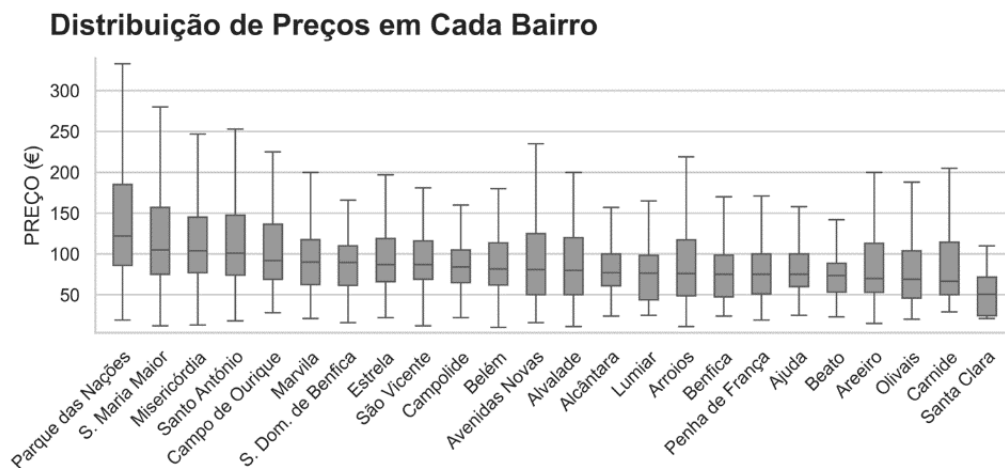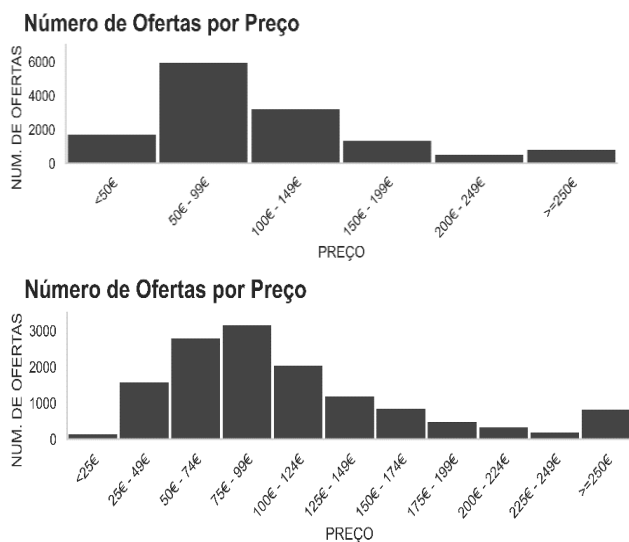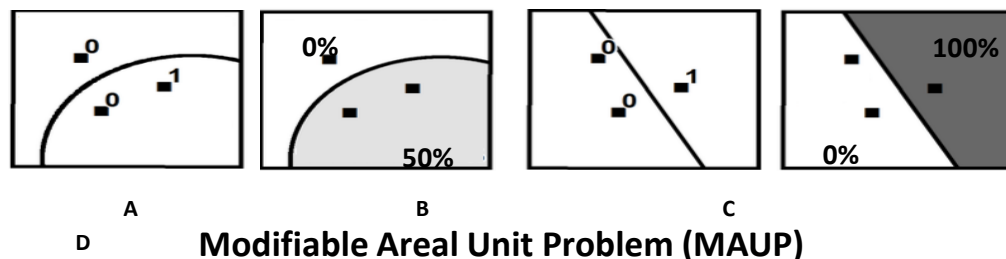

- Aggregating attribute

Dimensionality reduction techniques:

Try represent a n dimensional dataset using  $k < n$  attributes/dimensions

Principal Component Analysis (PCA)

Linear Discriminant Analysis (LDA)

Multi Dimensional Scaling (MDS)



t- Distributed Stochastic Neighbor Embedding (t-SNE)

Etc.

Example:


Only two attributes (CP1 and CP2) represent 97.5% of the original iris dataset in a new space

<https://plotly.com/r/pca-visualization>

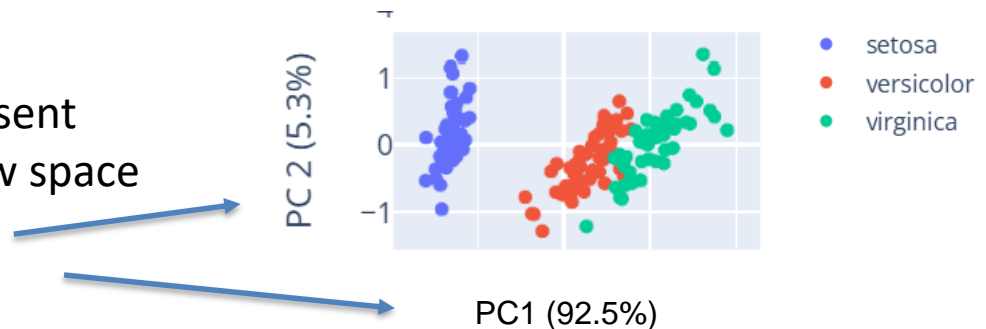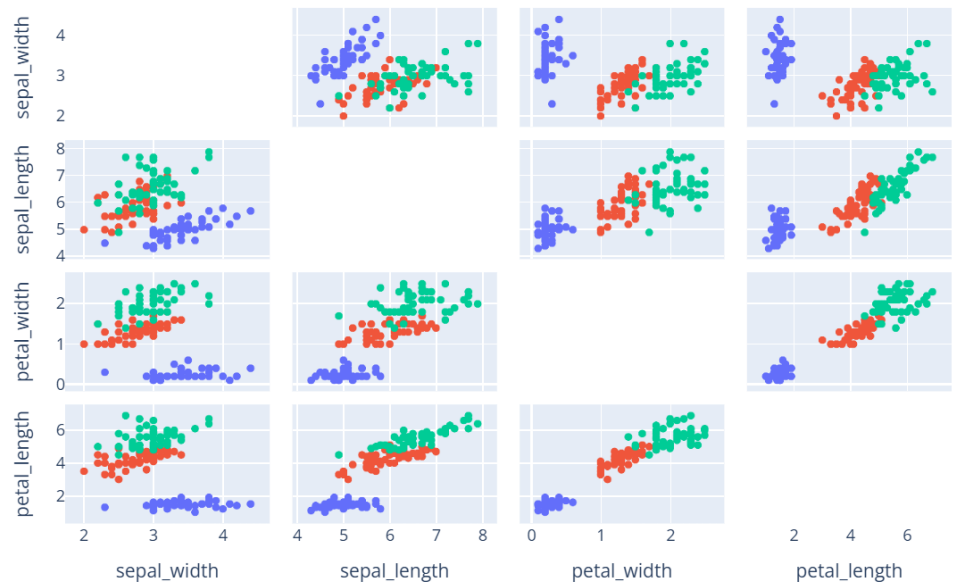

Total Explained Variance = 99.48

- setosa
- versicolor
- virginica

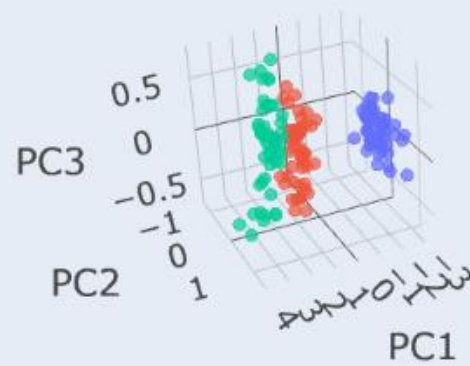



| Method | Main characteristics   | Main usage in Visualization  |
|--------|--|--|
| PCA    | Non-supervised (does not need a predefined k)                                    | Exploring the dataset, particularly when structure particularly is important |
|        | Linear (new attributes/dimensions (PC) are linear combinations of the originals) |  |
|        | PCs are ordered by importance  |  |
|        | Tries to preserve dataset global structure                                       |  |
| LDA    | Supervised (needs predefined k)  | Representing well separated classes, mainly in annotated datasets            |
|        | Linear   |  |
|        | Tries to maximize separation among classes                                       |  |
| MDS    | Non-supervised   | Visualizing pairs of items when only relative distances are known            |
|        | Não Linear   |  |
|        | Tries to preserve distances (or their order)                                     |  |
| t-SNE  | Non-supervised   | Representing clusters, particularly for very high n datasets                 |
|        | Non-linear (probabilistic approach)  |  |
|        | Tries to preserve local dataset structure  |  |

# Main bibliography

- Spence, R., *Information Visualization, An Introduction*, 3rd ed., Springer, 2014
- Spence, R., *Information Visualization, Design for Interaction*, 2nd ed., Prentice Hall, 2007
- Kirk, A., *Data Visualisation: A Handbook for Data Driven Design*, SAGE Publications, 2019
- Kirk, A., *Data Visualization: a successful design process*, Packt Publishing, 2012 \*
- Munzner, T., *Visualization Analysis and Design*, A K Peters/CRC Press, 2014 \*
- Ware, C., *Information Visualization: Perception for Design*, 3rd ed Morgan Kaufmann 2012 \*

Explore books with \* and other Visualization books available at the playlist:

<https://learning.oreilly.com/playlists/74bfec5e-4346-48ff-82b4-657fda6922b6>

Acknowledgement: The author of these slides is grateful to Professor Robert Spence as he provided the electronic version of his book figures, as well as to colleagues and students who have provided examples

## Other bibliography

- Abello, J., S. Hadlak, H. Schumann and H. Schulz, "A Modular Degree-of-Interest Specification for the Visual Analysis of Large Dynamic Networks," *IEEE Transactions on Visualization and Computer Graphics*, vol. 20, no. 3, pp. 337-350, March 2014  
<https://ieeexplore.ieee.org/document/6574858/citations?tabFilter=papers#citations>
- Cockburn, A., Karlson, A., and Bederson, B., "A Review of Overview + Detail , Zooming , and Focus + Context Interfaces," *ACM Comput. Surv.*, January, 2009.  
<https://dl.acm.org/doi/10.1145/1456650.1456652>
- Kersten, M. and Murphy G., "Mylar : a degree-of-interest model for IDEs," *Proceedings of the 4th international conference on Aspect-oriented software development AOSD'05*, pp. 159–168.  
<https://dl.acm.org/doi/10.1145/1052898.1052912>
- W. Tao, et al, "Kyrix-S: Authoring Scalable Scatterplot Visualizations of Big Data," *IEEE Transactions on Visualization and Computer Graphics*, vol. 27, no. 2, pp. 401-411  
<https://ieeexplore.ieee.org/document/9222038>
- Tominski, C., Gladisch, S., Kister, U., Dachzelt, R. and Schumann, H., "Interactive Lenses for Visualization : An Extended Survey," *Comput. Graph. Forum*, vol. 36, no. 6, pp. 173–200, 2017.  
<https://onlinelibrary.wiley.com/doi/abs/10.1111/cgf.12871>
- Visualization Wiki, [http://www.wikiviz.org/wiki/Main\\_Page](http://www.wikiviz.org/wiki/Main_Page)

Examples: <https://www.spotfire.com/demos>