

Zehui Yin

First-year PhD Student in Geography at SEES

- **Email:** yinz39@mcmaster.ca
 - Please use your McMaster email address.
 - Please put the course code *ENVSOCY 4GA3* in the subject line.
 - Please include your name and student number in the body of the email.
 - I will try to reply within 24 hours (please expect longer delays during weekends/holidays).
- **Personal Website:** zehuiyin.github.io
- **Research Interests:** Spatial Analysis, Transportation, Travel Behaviour, Public Transit, Shared Mobility

Agenda for today

- Introduction to basic concepts for coding in R
- Getting a flavor of R syntax and style
- Setting up R and reproducible environment on your personal computer

R and RStudio



- R is a free and open-source programming language for statistical computing and graphics.
- RStudio is an integrated development environment (IDE) for coding in R.
 - An IDE is a set of tools that helps you code.
- We use RStudio to write our R codes.


R packages

- R packages are the fundamental units of reproducible R code.
- They can include functions, data, or both, along with documentation.
- Think of them as plug-ins that enhance the functionality of existing software.
- For example, web browser extensions like ad blockers add additional features that the original browser doesn't have.

Reproducible environment


- An environment is the system where a program is run, including hardware and software such as operating system dependencies, programming language, packages, their configuration, and versions.
- Just as running 1000 meters affects individuals differently, running code on different computers or with different package versions can produce varied results.
- A reproducible environment ensures that everyone gets the same result by keeping the environment consistent.

renv package

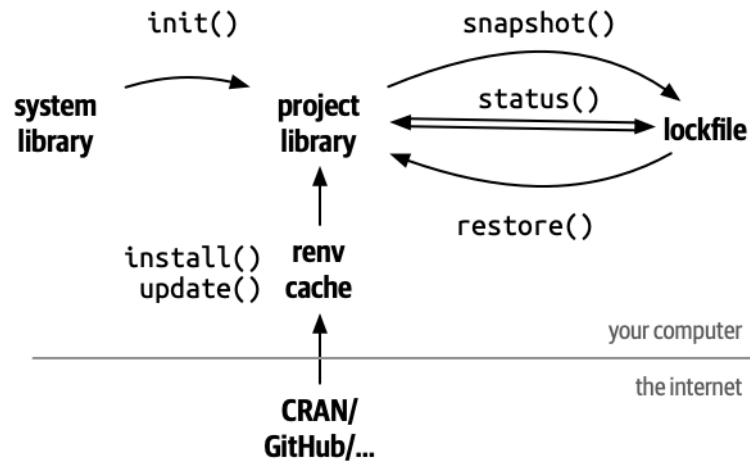


- `renv` is an R package that helps create reproducible environments for R projects.
- It records the R version and all R packages along with their versions in a lockfile.
 - A lockfile is a text file that stores all the environment information.

Code hosting and Github



- Code hosting involves storing code online to facilitate sharing, management, and collaboration with others.
- One of the most popular code hosting platforms is GitHub (owned by Microsoft).
- Both the textbook and the companion R package used in this course are hosted on GitHub.
- GitHub is like a cloud drive (similar to OneDrive or Dropbox) but specialized for storing code, including R scripts.

R Markdown vs. R

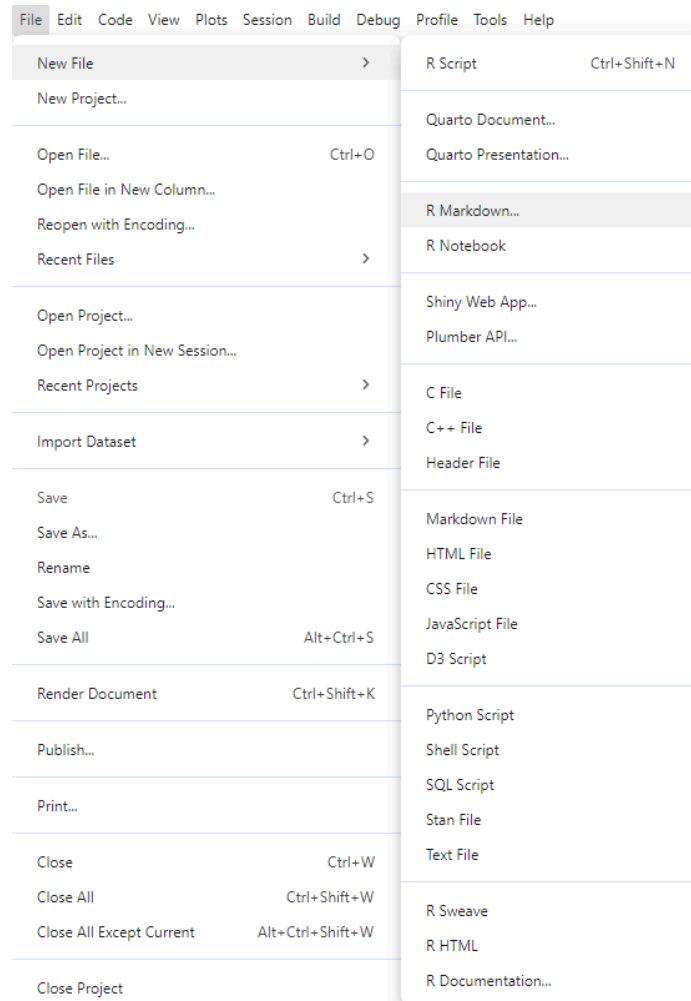

- R Markdown is a file format that combines R code, its results, and accompanying text.
- It uses the file extension `.Rmd` and essentially is a plain text file integrating markdown and R.
- You can start by creating an `Rmd` file on the lab computer.

R Markdown syntax

```
1 ---
2 title: "Untitled"
3 author: "Zehui Yin"
4 output: html_document
5 ---
6
7 # Heading level 1
8 ## Heading level 2
9 text...text...text
10 **bold**    __bold__
11 *italic*    _italic_
12
13 ```{r}
14 print("Hello world!")
15 ```
```

①

②

③

- ① **YAML header:** stores settings or meta information
- ② **Markdown text:** contains plain text in markdown format.
- ③ **R code chunk:** contains R code to be executed

R basics: arithmetic operations

You can start by trying out R on the lab computer. Later, we'll set it up on your personal computer.

R can be used as a calculator, using intuitive symbols for these operations:

```
1 1 + 5
```

```
[1] 6
```

```
1 8 - 3
```

```
[1] 5
```

```
1 3 * 4
```

```
[1] 12
```

```
1 9 / 3
```

```
[1] 3
```

R basics: assigning values

One of the cornerstones of programming languages is assignment. You can assign a value/object to a name using `<-` (suggested R style) or `=` (“Python” style).

```
1 a <- 1
2 b <- 3
3 a + b
```

```
[1] 4
```

```
1 c = 7
2 d = 5
3 c * d
```

```
[1] 35
```

R basics: built-in functions

R comes with many built-in functions. The calling syntax is `function(parameter1, parameter2, ...)`. Additionally, with extra R packages, there are even more functions you can use.

```
1 values <- c(1, 2, 3, 4, 5, 6, 7, 8, 9, 10)
2 sum(values)
```

```
[1] 55
```

```
1 mean(values)
```

```
[1] 5.5
```

```
1 library(MASS)
2 # integrate the sin function from 0 to pi.
3 area(sin, 0, pi)
```

```
[1] 2
```

R basics: indexing

Indexing is the process of selecting specific values from an object based on their index location. Whenever you see `[]` or `$` in R, some form of indexing is happening.

```
1 v <- c(1, 2, 3, 4, 5, 6, 7, 8, 9, 10)
```

1 2 3 4 5 6 7 8 9 10

```
1 v[2]
```

```
[1] 2
```

```
1 v[2:4]
```

```
[1] 2 3 4
```

```
1 v[c(TRUE, T, T, T, T, TRUE,  
2    FALSE, F, FALSE, F)]
```

```
[1] 1 2 3 4 5 6
```

R basics: indexing

```
1 df <- data.frame(col1 = c(1, 2, 3),  
2                   col2 = c(4, 5, 6))
```

col1	col2
1	4
2	5
3	6

```
1 df[1, 2]
```

```
[1] 4
```

```
1 df[, "col2"]
```

```
[1] 4 5 6
```

```
1 df$col1
```

```
[1] 1 2 3
```

R basics: flow control

Flow control is an important component of any programming language. In R, the `if-else` statement and loops work as follows:

```
1 x <- 6
2 if (x > 5) {
3   print("Greater than 5")
4 } else {
5   print("Less or equal to 5")
6 }
```

```
[1] "Greater than 5"
```

```
1 for (i in 1:3) {
2   print(i)
3 }
```

```
[1] 1
```

```
[1] 2
```

```
[1] 3
```

R basics: custom functions

To define your own function in R, you can use the following syntax. Note that the last line of code is automatically returned by R, though a “Python” style return statement is also valid in R.

```
1 add <- function(a, b) {  
2   a + b  
3 }  
4  
5 add(1, 4)
```

```
[1] 5
```

```
1 add <- function(a, b) {  
2   return(a + b)  
3 }  
4  
5 add(1, 4)
```

```
[1] 5
```


Download R version 4.4.2

- <https://mirror.csclub.uwaterloo.ca/CRAN/>



CRAN
[Mirrors](#)
[What's new?](#)
[Search](#)
[CRAN Team](#)

About R
[R Homepage](#)
[The R Journal](#)

Software
[R Sources](#)
[R Binaries](#)
[Packages](#)
[Task Views](#)
[Other](#)

Documentation
[Manuals](#)
[FAQs](#)
[Contributed](#)

Donations
[Donate](#)

The Comprehensive R Archive Network

Download and Install R

Precompiled binary distributions of the base system and contributed packages, **Windows and Mac** users most likely want one of these versions of R:

- [Download R for Linux](#) ([Debian](#), [Fedora/Redhat](#), [Ubuntu](#))
- [Download R for macOS](#)
- [Download R for Windows](#)

R is part of many Linux distributions, you should check with your Linux package management system in addition to the link above.

Source Code for all Platforms

Windows and Mac users most likely want to download the precompiled binaries listed in the upper box, not the source code. The sources have to be compiled before you can use them. If you do not know what this means, you probably do not want to do it!

- The latest release (2024-10-31, Pile of Leaves) [R-4.4.2.tar.gz](#), read [what's new](#) in the latest version.
- The CRAN directory [src/base-prerelease](#) contains R alpha, beta, and rc releases as daily snapshots in time periods before a planned release.
- Between releases, the same directory [src/base-prerelease](#) contains snapshots of current patched and development versions.
Please read about [new features and bug fixes](#) before filing corresponding feature requests or bug reports.
- Alternatively, daily snapshots are [available here](#).
- Source code of older versions of R is [available here](#).
- Contributed extension [packages](#).

Download RStudio

- <https://posit.co/download/rstudio-desktop/>

 [PRODUCTS](#) [OPEN SOURCE](#) [USE CASES](#) [PARTNERS](#) [LEARN & SUPPORT](#) [ABOUT](#)



DOWNLOAD

RStudio Desktop

Used by millions of people weekly, the RStudio integrated development environment (IDE) is a set of tools built to help you be more productive with R and Python.

Don't want to download or install anything? Get started with RStudio on [Posit Cloud for free](#). If you're a professional data scientist looking to download RStudio and also need common enterprise features, don't hesitate to [book a call with us](#).

Want to learn about core or advanced workflows in RStudio? Explore the [RStudio User Guide](#) or the [Getting Started](#) section.

1: Install R

RStudio requires R 3.6.0+. Choose a version of R that matches your computer's operating system.

R is not a Posit product. By clicking on the link below to download and install R, you are leaving the Posit website. Posit disclaims any obligations and all liability with respect to R and the R website.

DOWNLOAD AND INSTALL R

2: Install RStudio

DOWNLOAD RSTUDIO DESKTOP FOR WINDOWS

Size: 265.27 MB | [SHA-256: 5EFCD188](#) | Version: 2024.12.0+467 |
Released: 2024-12-16


Restoring the environment

Download the [Applied-Spatial-Statistics](#) zip file from Avenue and unzip it. You should then have a folder with the following structure:

```
Applied-Spatial-Statistics/  
├── renv/  
├── .gitignore  
├── .Rprofile  
├── Applied-Spatial-Statistics.Rproj  
├── README.md  
├── README.Rmd  
└── renv.lock
```

- Double-click the [Applied-Spatial-Statistics.Rproj](#) file to open the R project.

Restoring the environment

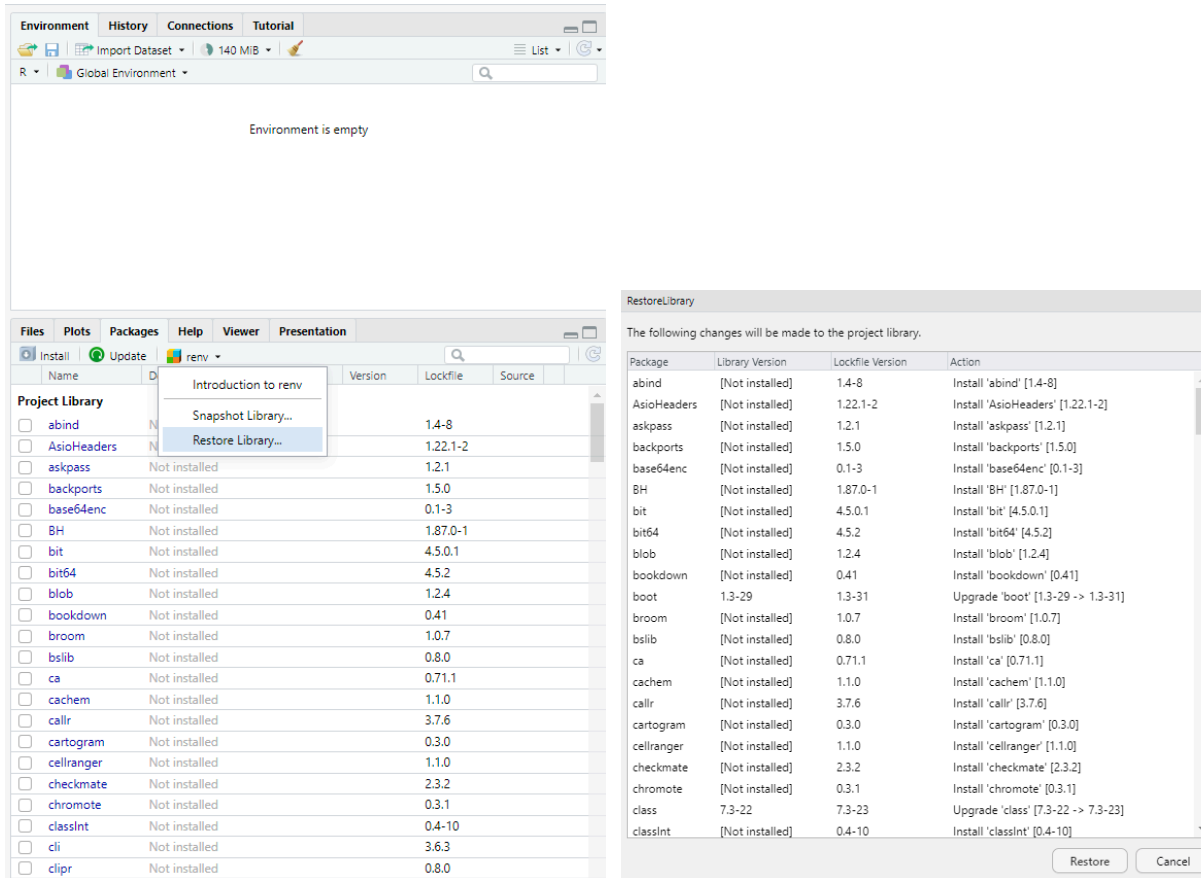

- Navigate to the bottom right panel.
- Click the Packages tab, then the renv button, and finally select the **Restore Library** option.
- Click the **Restore** button in the pop-up panel.

RTools 4.4 for Windows users

- <https://mirror.csclub.uwaterloo.ca/CRAN/bin/windows/Rtools/>
- Ensure you download the **Rtools** version that matches your installed R version.
- **Rtools** is a set of programs required on **Windows** to build R packages from source.
- If you are using **Mac** or **Linux**, you can skip this step.

RTools: Toolchains for building R and R packages from source on Windows

Choose your version of Rtools:

RTools 4.4	for R versions from 4.4.0 (R-release and R-devel)
RTools 4.3	for R versions 4.3.x (R-oldrelease)
RTools 4.2	for R versions 4.2.x
RTools 4.0	for R from version 4.0.0 to 4.1.3
old versions of RTools	for R versions prior to 4.0.0

Install $LATEX$

$LATEX$ is a high-quality typesetting system. While it may seem as a language, understanding it isn't necessary for our purposes. We will use it to export [Rmd](#) files with results into PDF files.

If you already use $LATEX$ and have it installed through [MiKTeX](#) or [TeX Live](#), you can skip this step.

If you are unfamiliar with $LATEX$ and don't have it installed yet, simply run the following R code to install it:

```
1 tinytex::install_tinytex()
```

Lab slides



- You can access all the lab slides by scanning the QR code or by visiting the URL directly.
- zehuiyin.github.io/ENVSOCITY4GA3

References

- <https://r-pkgs.org/>
- <https://book.the-turing-way.org/reproducible-research/renv.html>
- <https://rstudio.github.io/renv/articles/renv.html>