Consent Management

Last updated by | m.calderon.santiago@accenture.com | 20 abr 2026 at 16:13 CEST

Contents

- Consents and Preferences AS-IS
- Consents and Preferences TO-BE
  - Individual
    - Individual Details
      - Consent Aggregation Logic (Roll-up Summary Behavior)
    - Contact Point Data object: Contact Point
  - DataUsePurpose
  - Consent Traceability: Change of Consent
  - Preferences
    - Master Preference
    - Preference
- Initial Data Migration
- More Details

Consents and Preferences AS-IS

Consents and Preferences – As-Is

11.Consent Management (as is)_v2.xlsx

Presently, regional entities are responsible for managing consent and contact information in disparate systems, thereby hindering the centralization of these data.

	NoA	Europe	China	LATAM Direct	LATAM Distribution	EEMEA Direct	EEMEA Distribution	APAC Direct	APAC Distribution
Marketing Comunications	HubSpot (email, social, microsites)	Email Social Channels	WeChat Email	Email & Social communications	HubSpot	Email Social Campaings HighSpot	Email Social Communications HighSpot	Email WhatsApp WeChat	Email WhatsApp WeChat
Contacts	Launchpad HubSpot Third—party sources	CRM Fiori Website Forms Portals Events Excel	Local CRM Events External Platforms	CRM Fiori Excel Events Portals	CRM Fiori Events Portals Excel Manual lists	CRM Fiori Excel Events BU-specific lists	CRM Fiori Excel Events Manual lists	CRM Fiori Excel HubSpot Portals Events Manual lists	CRM Fiori Excel Events Portals Spreadsheets
Unsubscribe links	Email	Email Forms	WeChat Third-party platforms	Email	Email	Email	Email	Email	Email
Consent capture information	No mention of dedicated consent fields in the data model.	No explicit confirmation of structured consent fields.	No evidence of standardized consent fields in CRM.	No centralized governance or explicit mention of consent fields in the data structure.	No detail on whether consent flags are stored as structured fields.	No indication of formal consent fields in CRM.	No explicit mention of consent fields in the data model.	No confirmation of standardized consent fields in CRM.	No confirmation of standardized consent fields in CRM.
User's Signature	No	No	No	No	No	No	No	No	No

© Werfen All rights reserved. Confidential. For internal use only

werfen

Consents and Preferences TO-BE

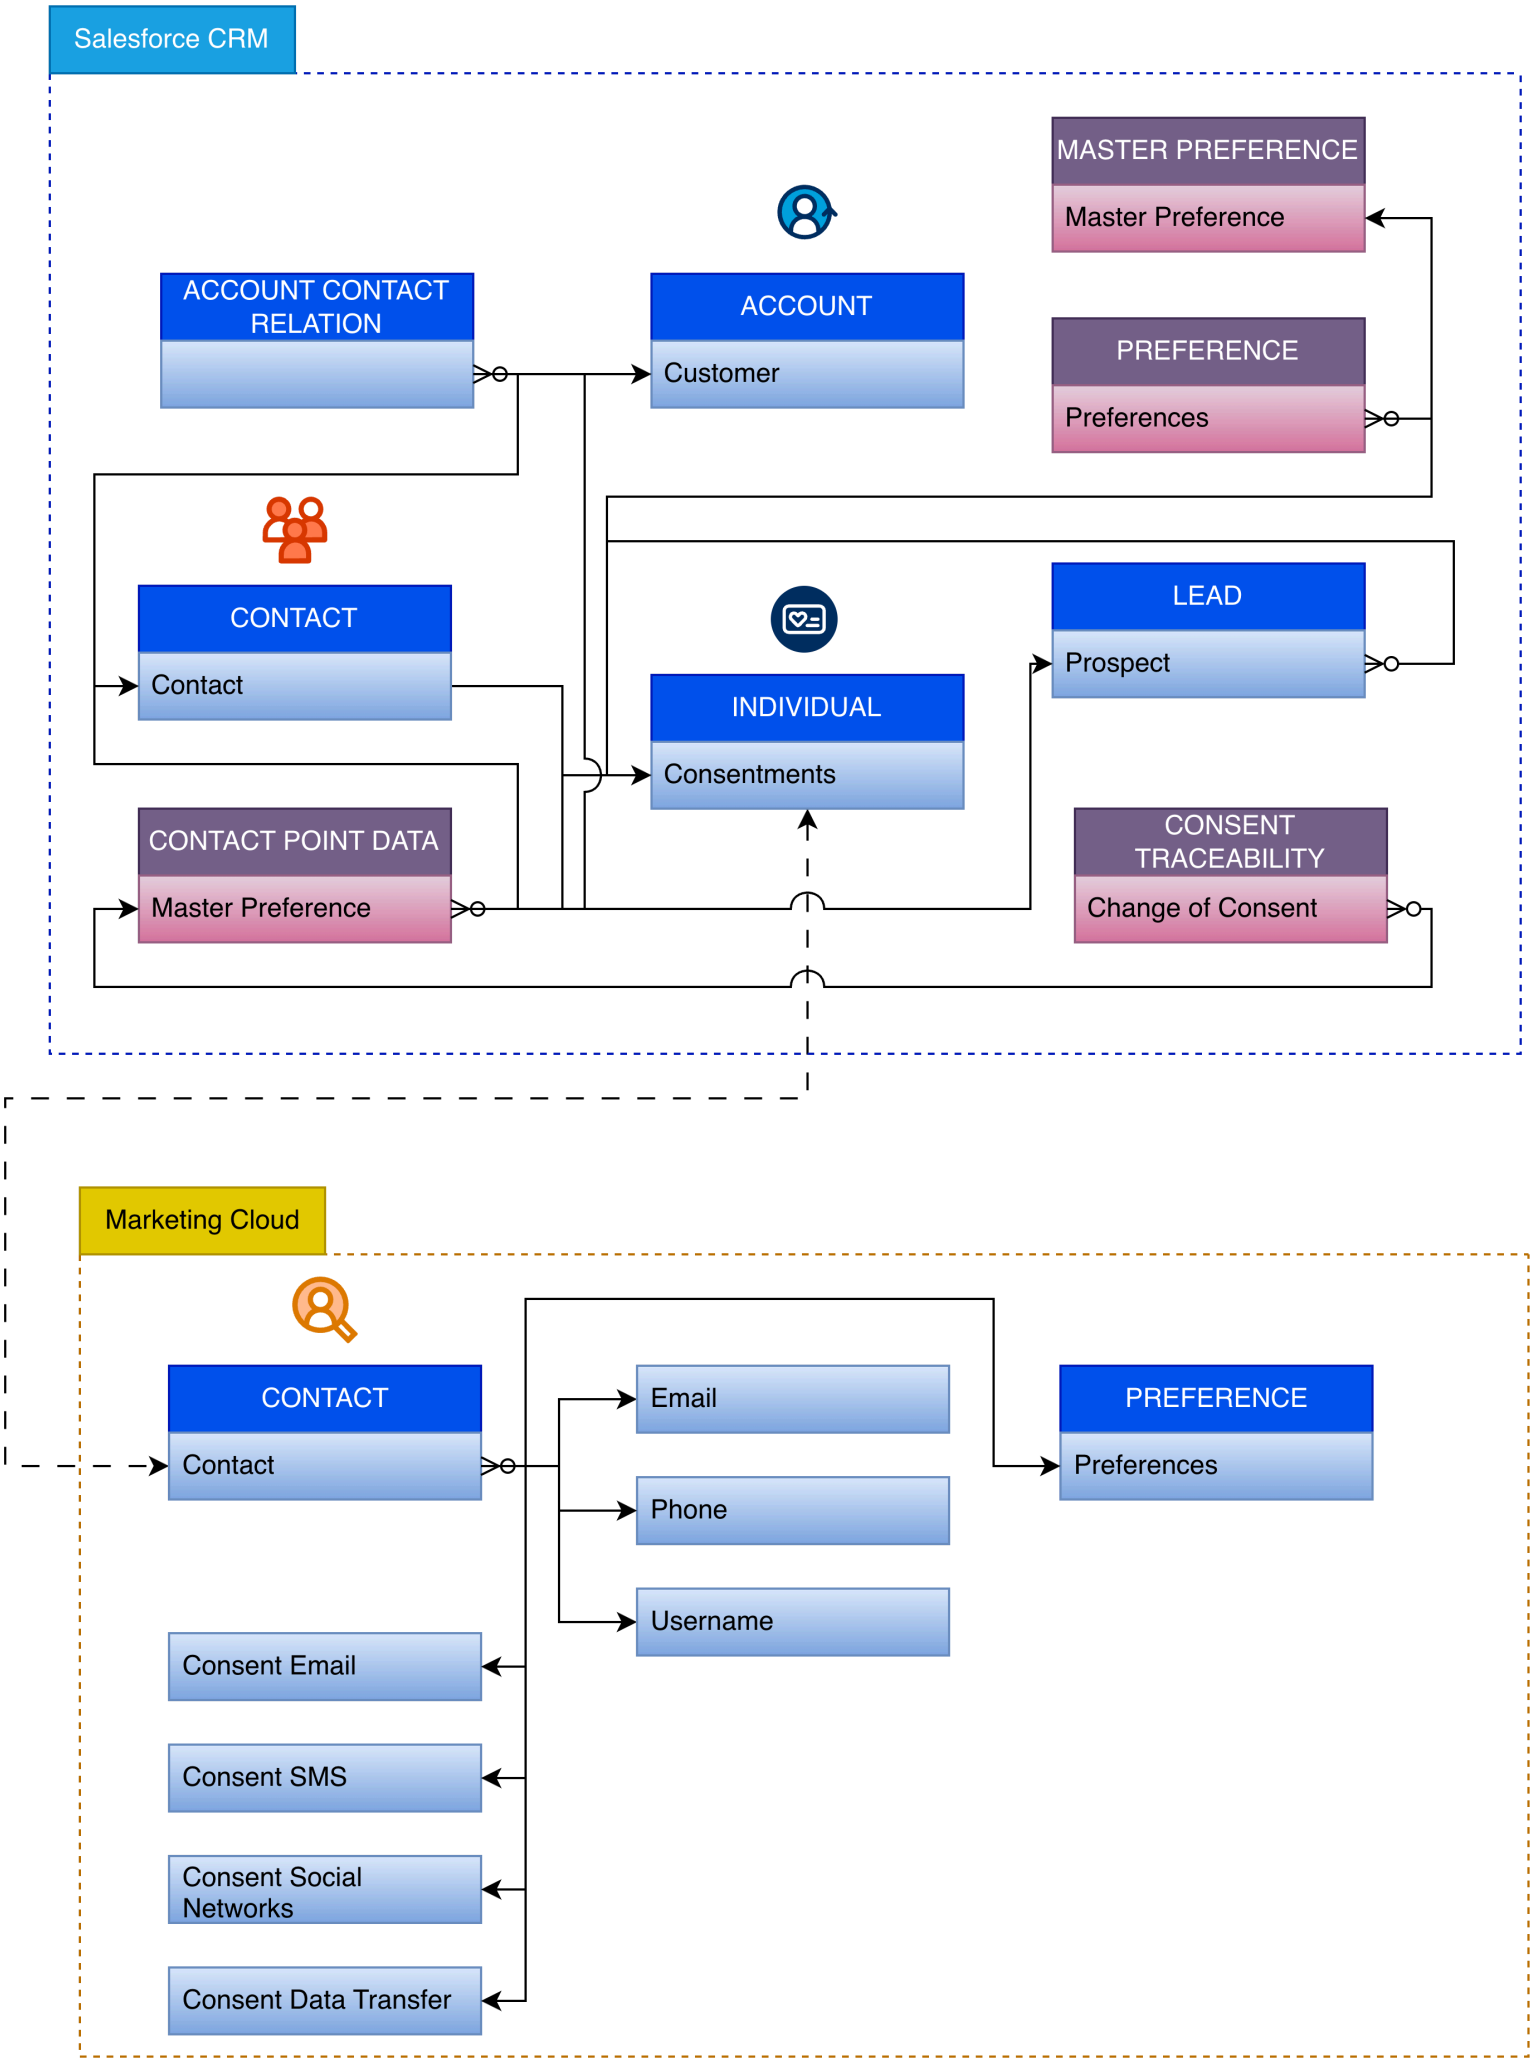
Salesforce CRM
MASTER PREFERENCE
Master Preference
ACCOUNT CONTACT RELATION
ACCOUNT
Customer
PREFERENCE
Preferences
CONTACT
Contact
LEAD
Prospect
INDIVIDUAL
Consentments
CONTACT POINT DATA
Master Preference
CONSENT TRACEABILITY
Change of Consent
Marketing Cloud
CONTACT
Contact
Email
Phone
Username
PREFERENCE
Preferences
Consent Email
Consent SMS
Consent Social Networks
Consent Data Transfer

Individual

Consent management for both customers and distributors will be centralized within the **Individual Object**, leveraging its native capability to relate to both **Lead** and **Contact** records. To ensure data continuity, consent records will be automatically inherited from the Lead to the Contact upon conversion.

The **Individual record** associated with a specific Contact or Lead will be populated within the standard **IndividualId** lookup field on the respective record.

Consent management will be facilitated through a dedicated **Marketing Cloud CloudPage**. The system will monitor the creation of new Leads and Contacts: if a record is generated without an existing **IndividualId**, a new Individual record will be automatically instantiated with all consent values set to **'False'** by default.

This event will trigger an automated email containing a secure link to the Preference Center. This ensures that every new individual in the database is invited to provide their explicit consent, while records converted from Leads will seamlessly maintain their inherited IndividualId and prior preferences.

The system will utilize two specific **Record Types**: **Customer Consents** and **Distributor Consents** to differentiate between Customers and Distributors. These records will be bidirectionally synchronized with **Marketing Cloud**, ensuring that automated communications are strictly restricted to the channels and preferences explicitly authorized by the user.

Individual Details

Within the data architecture, the **Individual** object will serve as the primary master record for data privacy and compliance management. Given that granular consent and communication preferences will be captured, tracked, and maintained via the related *Contact Point Data* data model, the **Individual** object will be provisioned strictly with the minimum mandatory fields required for record instantiation.

- **Name** required for record instantiation; mapped from Lead/Contact LastName *(Note: LastName is the minimum system-required field to successfully generate an Individual record)*.
- **External Id**: A unique text field used for cross-system synchronization (mirrors the Lead/Contact ID).
- **Consent Status**: A summary automatically calculated picklist representing the global lifecycle status (**OptIn**, **OptOut**).
- **Has Email**: Checkbox. This automatically calculated field serves as a **Quality Report Indicator**. It allows the business to identifyat a glance, whether a Individual has email contact information.
- **Has Phone**: Checkbox. This automatically calculated field serves as a **Quality Report Indicator**. It allows the business to identifyat a glance, whether a Individual has phone contact information.

This architectural approach ensures that the **Individual** object provides a high-level "Source of Truth" for marketing suppressions while the **Contact Point Data** object manages the complexity of granular channel-specific consents (Email, Phone, etc.).

Consent Status, Has Email and Has Phone fields will be automatically calculated using the flow **Update Individual Fields based on Contact Point**.

Page Layout: WESAL_ply_salesConsent

Consent Aggregation Logic (Roll-up Summary Behavior)

The **Consent Status** field on the Individual record functions as a calculated summary of all related **Contact Point Data** records. An automated logic (Trigger or Flow) will recalculate this status whenever a related Contact Point record is created or modified, following these business rules:

- **Global Opt-In:** If **at least one** related Contact Point Data record is in the "OptIn" state, the Individual's Consent Status shall be set to **OptIn**.
- **Global Opt-Out:** If **none** of the related Contact Point Data records are in the "OptIn" state (i.e., all are `OptOut` or `OptInPending`), the Individual's Consent Status shall default to **OptOut**.

Contact Point Data object: Contact Point

A new custom object, **Contact Point Data** and a new record type **Contact Point**, will be implemented to manage multiple communication channels (Email, Phone, Social, etc.) and their specific relationships with various Accounts. This architecture provides a **highly scalable framework**, enabling the addition of new contact types (f.e., emerging

social platforms or fax) without structural changes.
Each record will store granular consent data, linking the communication point to its specific **Data Use Purpose** and the associated Account, ensuring precise compliance management.

The **Contact Point Data** object will capture and track the lifecycle of each contact method using the following schema:

- **Contact Point**: Text - The value of the contact point (f.e., 'usuario@email.com' or '@username')
- **Capture Contact Point Type**: Picklist - Classification (Email, Social Media, Fax, Phone, Data Transfer).
- **Capture Source**: Picklist - Source of origin (Marketing Cloud, Contract, Lead). *By default Marketing Cloud*
- **DataUsePurposeId**: Link to the **Data Use Purpose** object (Marketing or Informative). *Only Marketing requires consent and involves sending commercial communications*
- **Name**: Automatically populated with the Contact or Contact Point Type value.
- **Privacy Consent Status**: Picklist - Lifecycle status (OptIn, OptOut, OptInPending, OptOutPending). *By default OptInPending*
- **Capture Date**: Datetime
- **Double Consent Capture Date**: Datetime
- **Effective From**: Datetime
- **Effective To**: Datetime
- **Social Channel**: Picklist . (f.e., 'Linkedin', 'Instagram')
- **Contact**: Link to the Contact Object.
- **Lead**: Link to the Lead Object.
- **Account**: Link to the Account Object.
- **Individual**: Link to the Individual Object.

To ensure full data continuity, the system will perform an **automated reference update** during Lead conversion. All **Contact Point Data** records previously associated with the Lead must be re-linked to the newly created Contact. This process guarantees that every email, phone number, and social profile (like LinkedIn) captured during the prospecting stage remains associated with the individual's permanent CRM record.

DataUsePurpose

To accurately govern consent and outbound messaging, the architecture will utilize the standard **DataUsePurpose** object. The system will be provisioned with two baseline reference records representing the core communication types.

Furthermore, to facilitate robust system management, avoid hardcoded Salesforce IDs in automations (Apex/Flows), and ensure seamless CI/CD deployments, a custom External ID field will be implemented on the object.

Name	Operational Purpose	External ID Value
Marketing	Designated for commercial and promotional communications.	DataUseMarketing
Informative	Designated strictly for informational or transactional contact purposes, explicitly excluding commercial messaging.	DataUseInformative

Consent Traceability: Change of Consent

***Record Type**: Change of Consent*

To track all modifications to customer and distributor consents, a custom object named **'Consent Traceability'** will be implemented as an **audit trail**. This object will log every 'opt-in' and 'opt-out' event through the following key fields:

- **User**: User Lookup - The user who performed the update. This will typically be the customer/distributor via a **Marketing Cloud CloudPage**, as internal Salesforce users will be restricted from manually modifying consent records.

- **Modified Date**: Datetime - The exact timestamp of the update.
- **Consent**: Picklist - Indicates the specific preference modified (Email, SMS, Social Networks, or Data Transfer).
- **Old Value**: Checkbox - Capture previous state to provide a clear history of changes.
- **New Value**: Checkbox - Capture the post-state to provide a clear history of changes.
- **Individual** Individual Lookup - A reference to the specific Individual record being updated.
- **Contact Point Data** Contact Point Data Lookup - A reference to the specific Contact Point Data record being updated.
- **Type**: Picklist - Differentiates between **Customer** and **Distributor** individual record types (Customer, or Distributor).

The creation of **Consent Traceability** records will be automated via a **Record-Triggered Flow**. This flow will be configured to execute every time an **Contact Point Data** record is created or updated, ensuring that any change in consent status is immediately captured and logged for audit purposes.

Preferences

The preference framework is built upon a **Many-to-Many relationship** model. A new custom object, **'Master Preference'**, will serve as the central catalog for all available preferences. To link these to specific individuals, a second custom object, **'Preference'**, will act as the junction record, establishing the unique association between a Contact and their selected interests.

Master Preference

Record Type*: Master Preference*

The **Master Preference** object will act as the global catalog for all selectable user interests. Initially, this catalog will be populated with one record per **Strategic Business Unit (SBU)**.

Initial Records - Transplant, Transfusion, Autoimmunity, Hemostasis, and Acute Care Diagnostics.

Key Field Definitions:

- **Name**: Text - The specific SBU name as listed above.
- **Strategic Business Unit**: Picklist - A defined list containing: *Transplant, Transfusion, Autoimmunity, Hemostasis, and Acute Care Diagnostics*.
- **Active**: Checkbox - Controls the availability of the preference. **Default Value: False** (though all initial records will be set to True upon deployment).

Preference

Record Type*: Preferences*

The **'Preference'** custom object will function as a junction record to manage the many-to-many relationship between the **Master Preference** catalog and individual users.

Consistent with the consent management workflow, preference data will be captured and updated via **Marketing Cloud CloudPages**. The object will include the following key attributes to ensure data integrity:

- **Master Preference**: Master Preference Lookup - Identifies the specific category from the global catalog.
- **Individual**: Individual Lookup - Links the preference to the data privacy record (consent).
- **Contact**: Contact Lookup - Directly associates the preference with the specific Contact record for CRM visibility.
- **Lead**: Lead Lookup - Directly associates the preference with the specific Lead record for CRM visibility.
- **Type**: Picklist - Differentiates between **Customer** and **Distributor** individual record types (Customer, or Distributor).

In the event that a Contact is converted from a Lead, the system will ensure **full inheritance of all associated preferences**. These records will remain fully synchronized and manageable via **Marketing Cloud**, allowing the

customer to modify their interests through the Preference Center at any point during the lifecycle, with the changes reflecting back in the Contact record.

To ensure alignment between sales data and marketing preferences, a **Record-Triggered Flow** will be implemented on the **Contact Segmentation** object. Whenever a new segmentation record is created, the system will check if the associated **Business Unit** exists within the **Master Preference** catalog.

If a match is found and the preference is not already assigned to the Contact, the flow will automatically instantiate a new **Preference** record. This cross-object automation guarantees that interest profiles are updated in real-time based on segmentation changes.

Initial Data Migration

Initially, consent data will be loaded with a value of true for contacts with a contractual relationship and sales; the rest will be marked as customers without consent.

More Details

More Details: CODE_Consents_and_Preferences_v1