Contact Management

Last updated by | m.calderon.santiago@accenture.com | 27 mar 2026 at 14:34 CET

Contents

- Contact: Customer & Distributor
  - Customer
  - Distributor
  - Automated RecordType Assignment Based on Account T...
  - Contact Visibility & Multi-Account Sharing Model
  - Linking/Create a Contact
    - Linking an Accessible Contact
    - Linking an Inaccessible Contact or Creating New
  - Deleted Contacts
    - Soft Delete
    - Hard Delete
- Account Contact Relation
- Contact Point Data object: Contact Point
- Contact Segmentation: Customer Segmentation, Distrib...
  - Customer Segmentation
  - Distributor Segmentation
- Individual: Customer Consents, Distributor Consents

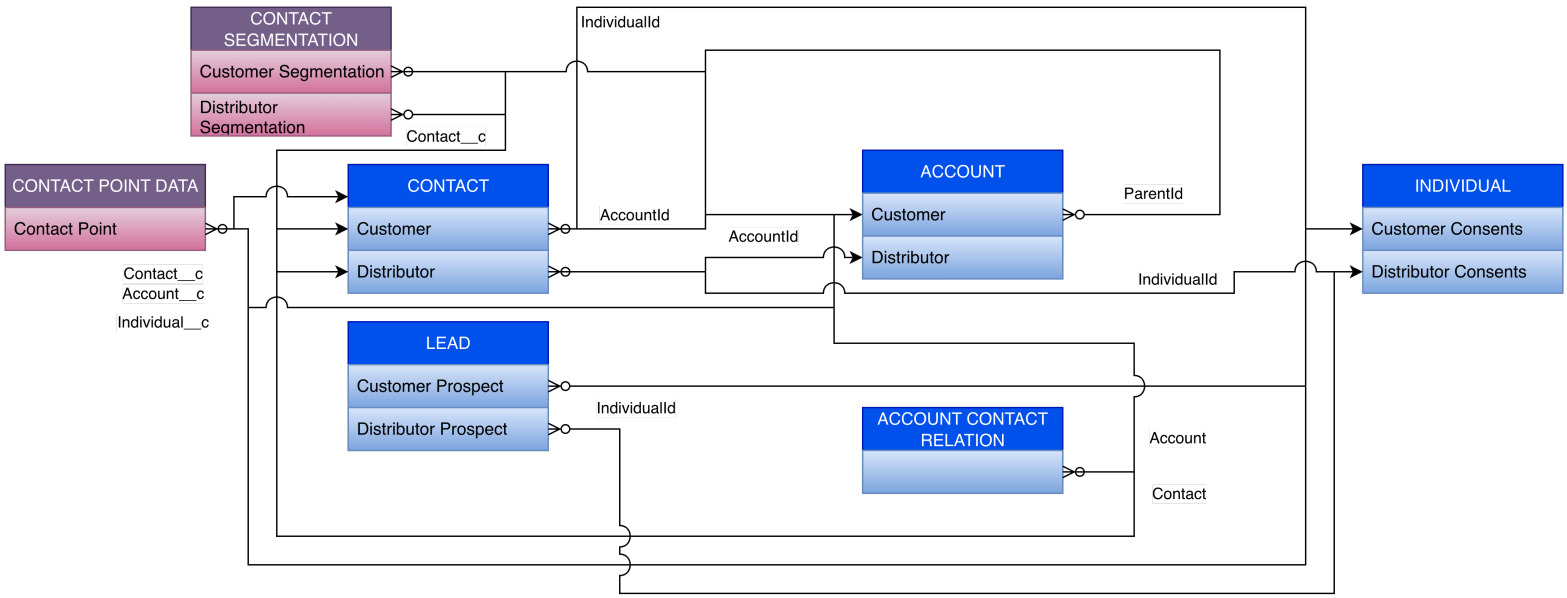

Contact: Customer & Distributor

To register contacts related to a customer, we will use the standard **Contact** object, with a new Record Type **Customer**, and the standard relationship through the **AccountId** field.

This makes it possible to capture each person's consents for email and/or telephone, since the relationship between a contact and the account may contain different contact information.

Salesforce will act as the master system for Contacts; therefore, these contacts will **not** be shared with the SAP system.

Customer

Some fields we need for the correct definition of the customer contact:

- **Comments**: Text Area
- **Contact Language**: Single Picklist (English, German, French, Spanish).
- **Other Languages**: multi-selection (English, German, French, and Spanish).
- **Status**: Single Picklist (Lead, Qualified, Canceled, Deleted). -> Depending by Primary Account Status (Except Deleted, *More details in the Deleted Contacts section*).
  - Account Status = Active, Block -> Contact Status = Qualified
  - Account Status = Rejected -> Contact Status = Canceled
  - Account Status = Prospect, Pending -> Contact Status = Lead
- **NIF/Fiscal ID**: Text
- **SAP Contact Number**: External and unique text field for data migration.
- **Bank Account**: Text
- **Origin**: Single Picklist (Sales, Service)
- **Deleted Date**: Date
- **Consent Status**: Formula Text `Individual.WESAL_fld_consentStatus__c`. This field serves as a **Quality Report Indicator**. It allows the business to identify, at a glance, whether a Contact has granted commercial consent for at least one of their associated contact points (Email, Phone, etc.).
- **Has Email**: Formula Checkbox `Individual.WESAL_fld_hasEmail__c`. This field serves as a **Quality Report Indicator**. It allows the business to identifyat a glance, whether a Contact has email contact information.
- **Has Phone**: Formula Checkbox `Individual.WESAL_fld_hasPhone__c`. This field serves as a **Quality Report Indicator**. It allows the business to identifyat a glance, whether a Contact has phone contact information.

Other standard fields:

- Account: Standard Lookup for primary account *(The remaining relationships will be in the account contact relation object)*
- Salutation
- First Name
- Last Name
- Full Name
- Mailing Address
- Description
- Gender Identity
- Lead Source
- Report To

The remaining contact information will be specific to your relationship with each Account and will therefore be found in the Account Contact Relation object or in the new custom Contact Point Data object.

Distributor

Some fields we need for the correct definition of the distributor contact:

- **Comments**: Text Area
- **Distributor Title**: Single Picklist *(Legal Representative, Sales Head, Operational Head, Logistics Head, Finance Head, RA Head, and Service Head)*.
- **SAP Contact Number**: External and unique text field for data migration.
- **Status**: Single Picklist (Lead, Qualified, Canceled, Deleted). -> Depending by Account Status (Except Deleted, *More details in the Deleted Contacts section*).
  - Account Status = Active, Block -> Contact Status = Qualified
  - Account Status = Rejected -> Contact Status = Canceled
  - Account Status = Prospect, Pending -> Contact Status = Lead
- **Deleted Date**: Date
- **Consent Status**: Formula Text `Individual.WESAL_fld_consentStatus__c`. This field serves as a **Quality Report Indicator**. It allows the business to identify, at a glance, whether a Contact has granted commercial consent for at least one of their associated contact points (Email, Phone, etc.).

- **Has Email**: Formula Checkbox `Individual.WESAL_fld_hasEmail__c`. This field serves as a **Quality Report Indicator**. It allows the business to identifyat a glance, whether a Contact has email contact information.
- **Has Phone**: Formula Checkbox `Individual.WESAL_fld_hasPhone__c`. This field serves as a **Quality Report Indicator**. It allows the business to identifyat a glance, whether a Contact has phone contact information.

Other standard fields:

- Account: Distributor Account Lookup.
- Salutation
- First Name
- Last Name
- Full Name
- Description
- Gender Identity
- Lead Source

The remaining contact information will be specific in the new custom Contact Point Data object (email, phone).

Automated RecordType Assignment Based on Account Type

When a new Contact is created in Salesforce, a **Trigger-flow** will be executed to assign the appropriate **RecordType** to the record, based on its parent Account (**AccountId**).

The logic will follow these scenarios:

1. **Customer Account** (RecordType = Customer; Type = Customer): The Contact's RecordType shall always be set to **Customer**.
2. **Distributor Account** (RecordType = Distributor; Type = Distributor): The Contact's RecordType shall always be set to **Distributor**.
3. **Prospect Account** (RecordType = Prospect; Type = Customer/Distributor): The Contact's RecordType will be determined by the Account's **Type** field, resulting in either **Customer** or **Distributor**.

Contact Visibility & Multi-Account Sharing Model

To accommodate the multi-account data model, the standard "Controlled by Parent" setting is insufficient, as it only inherits visibility from the Primary Account. Therefore, the **Organization-Wide Default (OWD)** for the **Contact** object is set to **Private**.

To enforce visibility across primary and secondary accounts, a **Record-Triggered Flow** (executing in System Mode) will manage programmatic sharing. This automation triggers upon the creation of a **Contact** or an **Account Contact Relation (ACR)**. The Flow queries the associated Territory and Account Team members of the linked Accounts and inserts **ContactShare** records to grant "Edit" access, ensuring visibility is dynamically synchronized across the account network.

More Details: [Sharing and Visibility - Contact]

Linking/Create a Contact

We have 2 possible scenarios:

Linking an Accessible Contact

If a user already has visibility over a Contact (due to an existing relationship with an Account they can access), adding a new relationship is handled via the standard **Account Contact Relation** related list. The user simply links the Contact to the new Account.

Linking an Inaccessible Contact or Creating New

If a Contact exists in the system but is not linked to any Account within the user's scope, the user will be unable to find the record via standard search. To resolve this, a custom action (**"New Contact" button**) will be implemented on the Account object:

1. **Global Search (System Context):** The user enters basic identifiers (Name, Email, and/or Phone). A flow running in **System Mode** searches the **Contact Point Data** table across the entire database, bypassing the user's sharing restrictions.

2. **Existing Match Found:**

    - The system prompts the user to link the existing Contact.
    - Upon confirmation, a new **ACR** record is created.
    - The sharing logic automatically triggers to grant the user (and their team) visibility over the Contact record.
3. **No Match Found:**

    - The system initiates the creation of a **New Contact**.
    - The current Account is automatically assigned as the **Primary Account** (AccountId).
    - Sharing rules are calculated, and the user is redirected to the standard Page Layout to complete the remaining Contact information.

Deleted Contacts

Soft Delete

To maintain data integrity and audit trails, contacts shall not be immediately purged from the system. Instead, a **Soft Delete** mechanism will be implemented via the **Status** field.

When a Contact's **Status** is updated to **Deleted**, a system automation (Trigger-flow) shall automatically populate the **Deleted Date** field with the current system date `TODAY()`. Conversely, if the **Status** is reverted from **Deleted** to any other value, the automation shall **nullify** (clear) the **Deleted Date** field to reflect the record's active state.

Hard Delete

To comply with data privacy regulations and storage optimization, a scheduled process will manage the permanent removal of records:

- **Scheduled Flow:** A daily process will identify all Contact records where the **Status** is **Deleted** and the **Deleted Date** is older than **five (5) years**. *(Perhaps we can decrease the frequency and make it a weekly or monthly process.)*
- **Batch Apex Implementation:** To ensure scalability and avoid **Salesforce Governor Limits** (specifically DML limits for high-volume data), the deletion will be executed via a **Batch Apex** job triggered by the Scheduled Flow.

Account Contact Relation

The solution architecture is designed to support **multi-account associations**, allowing a single **Customer Contact** to be linked to multiple **Customer Accounts** simultaneously.

Some fields we need for the correct definition of the Contact-Account relationship:

- **Department 1** - *Picklist values TBC*
- **Department 2** - *Picklist values TBC*
- **Department 3** - Text

Other standard fields:

- Contact
- Account
- Roles - *Picklist values TBC*

Contact Point Data object: Contact Point

A new custom object, **Contact Point Data** and a new record type **Contact Point**, will be implemented to manage multiple communication channels (Email, Phone, Social, etc.) and their specific relationships with various Accounts. This architecture provides a **highly scalable framework**, enabling the addition of new contact types (f.e., emerging

social platforms or fax) without structural changes.
Each record will store granular consent data, linking the communication point to its specific **Data Use Purpose** and the associated Account, ensuring precise compliance management.

The **Contact Point Data** object will capture and track the lifecycle of each contact method using the following schema:

- **Contact Point**: Text - The value of the contact point (f.e., 'usuario@email.com' or '@username')
- **Capture Contact Point Type**: Picklist - Classification (Email, Social Media, Fax, Phone, Data Transfer).
- **Capture Source**: Picklist - Source of origin (Marketing Cloud, Contract)
- **DataUsePurposeId**: Link to the **Data Use Purpose** object (Default: 'Marketing').
- **Name**: Automatically populated with the Contact or Contact Point Type value.
- **Privacy Consent Status**: Picklist - Lifecycle status (OptIn, OptOut, OptInPending, OptOutPending).
- **Capture Date**: Datetime
- **Double Consent Capture Date**: Datetime
- **Effective From**: Datetime
- **Effective To**: Datetime
- **Social Channel**: Picklist . (f.e., 'Linkedin', 'Instagram')
- **Contact**: Link to the Contact Object.
- **Lead**: Link to the Lead Object.
- **Account**: Link to the Account Object.
- **Individual**: Link to the Individual Object.

Contact Segmentation: Customer Segmentation, Distributor Segmentation

This object allows you to link a contact with the business units over which they exert influence in order to have the details and thus be able to suggest their association with the corresponding opportunities.

BU	BU name	Degree of Influence	KDM	KOL	Global KOL	KOL Comments	General Comments
1	Blood Gas	High	checkbox	checkbox	checkbox		
2	Hemostasis	Medium			only the SBUs can edit		
5	Autoimmunity	Low					
6	Serology						
7	PBM						
8	WBH						
U	Transplant						
T	Transfusion						
ZSY	HITS						
Z31	Clinical Chemistry						

We will have different information depending on whether the contact is a customer or a distributor. For this reason, we will also have different RecordTypes in the object, depending on the contact's RecordType: **Customer Segmentation** and **Distributor Segmentation**

A **unique segmentation value** will be enforced **for each combination of Contact, Account, and Business Unit**.

Customer Segmentation

- **Business Unit** - business unit Global picklist
- ~~**Business Line**: only apply for the "Other" Business Unit - Global Dependent Multi-Picklist~~
- **Contact** - Master-Detail relationship to **Customer** Contact
- **Account** - *Required* Lookup to Account, *Only account contact relations records are available*
- **Degree of Influence** - Picklist (High / Medium / Low)
- **KDM** - Checkbox
- **KOL** - Checkbox
- **Global KOL** - Checkbox
- **KOL Comments** - Text
- **General Comments** - Text

Distributor Segmentation

- **Business Unit** - business unit Global picklist
- ~~**Business Line**: only apply for the "Other" Business Unit - Global Dependent Multi-Picklist~~
- **Contact** - Master-Detail relationship to **Distributor** Contact
- **Account** - *Required* Lookup to Account, *Only account contact relations records are available*
- **Degree of Influence** - Picklist (High / Medium / Low)
- **KDM** - Checkbox
- **General Comments** - Text

Individual: Customer Consents, Distributor Consents

The consents associated with a contact will be stored in the standard **Individual** object, using **Customer Consents** and **Distributor Consents** Record Types. These consents may be recorded while the contact is still a Lead, and will later be inherited by the corresponding Contact record. *More details are available in the Consent Management section:* Consent Management