

---

# DiffeomorphicDemonsRegistrationWithMaskFilter

*Release 0.00*

Yongqiang Zhao<sup>1</sup>, Hans Johnson<sup>1</sup>

July 24, 2009

<sup>1</sup>Department of Psychiatry, University of Iowa

## Abstract

Diffeomorphic demons registration was widely used for medical image registration. This document describes the addition of mask processing mode with spatial objects for `itkDiffeomorphicDemonsRegistrationFilter` when just considering the deformation field at the region of interest.

Latest version available at the [Insight Journal](http://hdl.handle.net/10380/1338) [ <http://hdl.handle.net/10380/1338> ]  
Distributed under [Creative Commons Attribution License](#)

## Contents

<b>1</b>	<b>Description</b>	<b>1</b>
<b>2</b>	<b>Experiment</b>	<b>2</b>
<b>3</b>	<b>Usage</b>	<b>4</b>

---

The `DiffeomorphicDemonsRegistrationFilter` implements the demons deformable algorithm that register two images by computing the deformation field which will map a moving image onto a fixed image. This filter provides an efficient non-parametric diffeomorphic image registration algorithm based on Thirion demons algorithm [1]. However, the registration result would not be satisfied when the images include unexpected region. This is the motivation of the proposed filter which can deal with this condition by adding mask processing.

## 1 Description

The new `DiffeomorphicDemonsRegistrationWithMaskFilter` also use non-parametric diffeomorphic registration algorithm. It takes two `SpatialObjects` as the fixed and moving mask input. Then it calls its registra-

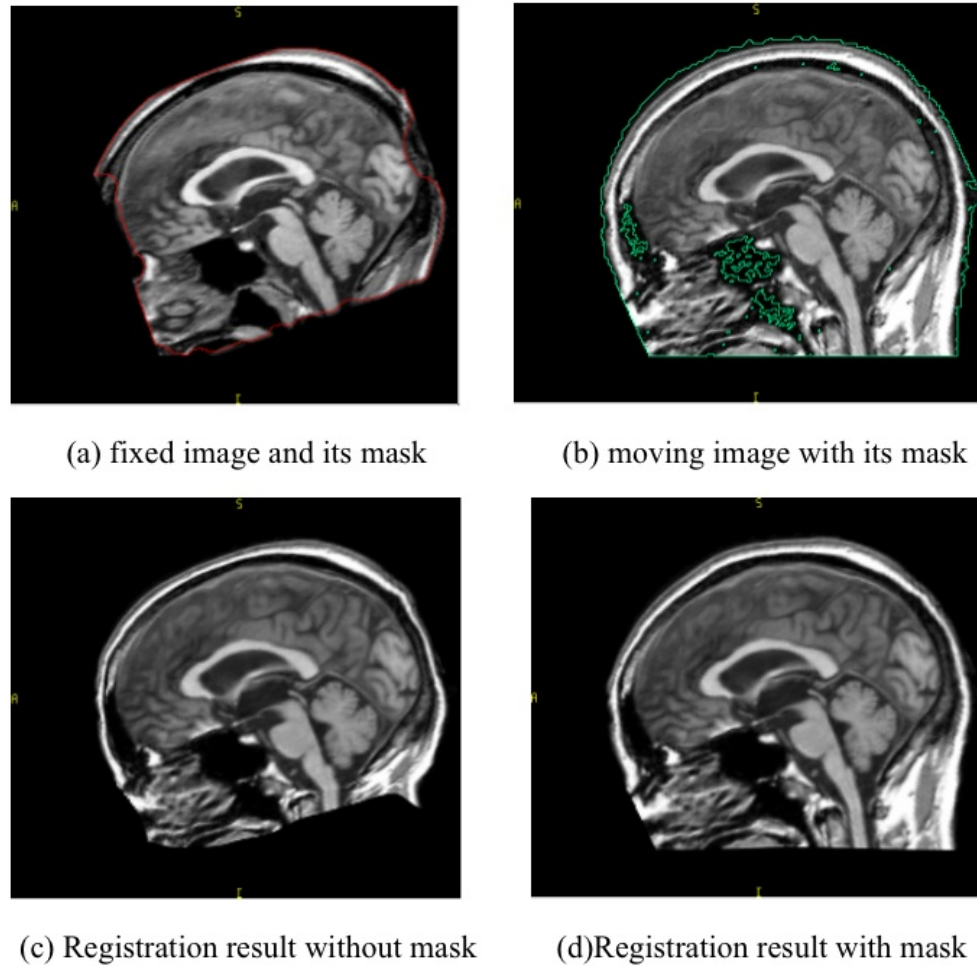


Figure 1: The registration images and results.

tion function (`itkESMDemonsRegistrationWithMaskFunction`) to compute the update field for the moving image only at intersection region between these two spatial objects. It also can take just one `SpatialObject` as either fixed mask or moving mask. The registration only happens in the region of this `SpatialObject`. The proposed filter without masks input is same as `DiffeomorphicDemonsRegistrationFilter`.

## 2 Experiment

Experiment was conducted to test the effectiveness of the proposed filter. The masks in red and green line in Figure 1 (a and b) were defined using a otsu foreground and hole filling algorithm. It is obviously that the proposed filter gives more reliable and valuable result from Figure 1 (c and d). The skull of the brain was kept very well as it is out of the intersection of two masks. The deformation fields at different direction in Figure 2 also show the improvement from the proposed filter.

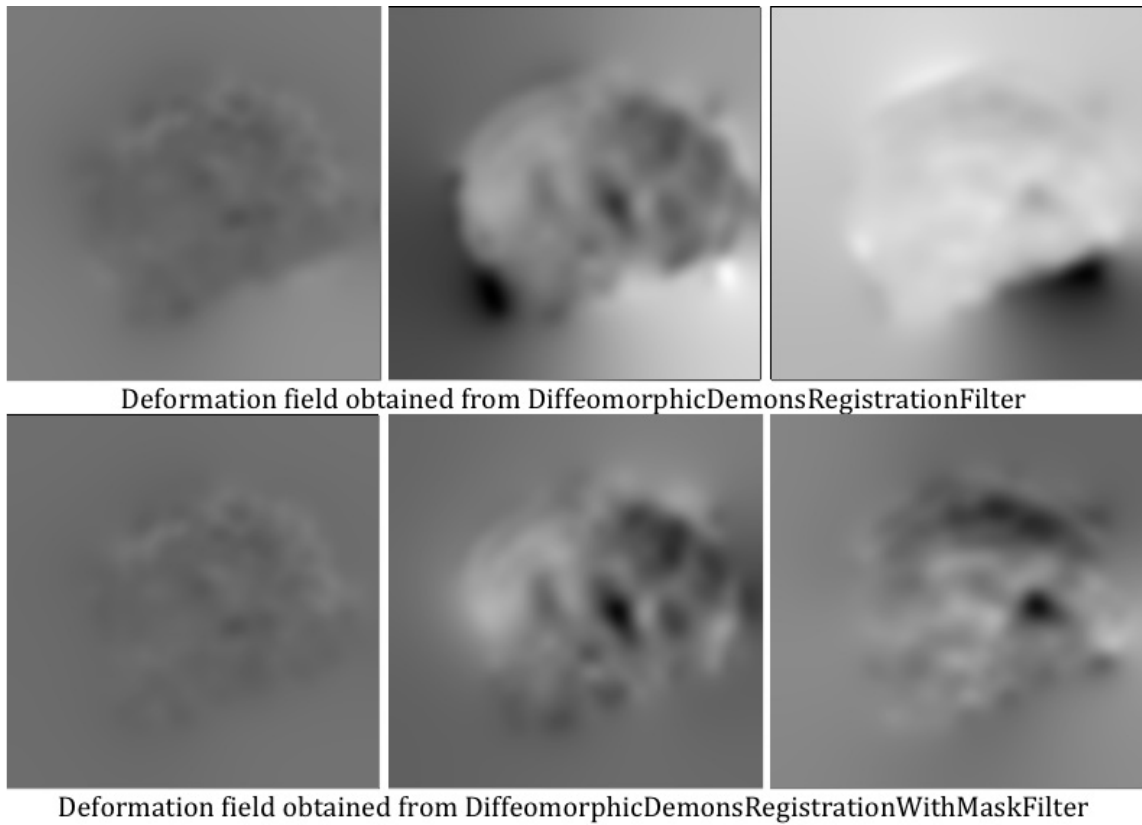


Figure 2: The deformation field at different direction. From left to right: X,Y,Z

### 3 Usage

The filter is really easy to use. It is instantiated like `DiffeomorphicDemonsRegistrationFilter` in ITK, i.e.,

```

Typedef itk::DiffeomorphicDemonsRegistrationWithMaskFilter
    <FixedImageType, MovingImageType, DeformationFieldType> FilterType;
FilterType::Pointer filter = FilterType::New();
filter->SetFixedImage(fixedImage);
filter->SetMovingImage(movingImage);

//Setting masks, the masks are itkSpatialObject
filter->SetFixedImageMask(fixedMask);
filter->SetMovingImageMask(movingMask);
...    //Set other parameters like DiffeomorphicDemonsRegistrationFilter

filter->Update()

```

### Acknowledgement

This work was supported by PREDICT, CHDI, and BRAINS Grant (R01 NS050568).

### References

- [1] Tom Vercauteren, Xavier Pennec, Aymeric Perchant, Nicholas Ayache, *Diffeomorphic demons: Efficient non-parametric image registration*. NeuroImage 45(1):61-72, 2009. ([document](#))