Statistical Machine Learning: DC Urban Forestry

Exploratory Data Analysis

AUTHOR
Zak Zerhouni, Andrew Hwang, and Tyler Kolmansberger

PUBLISHED
October 23, 2026

Setup

Data Source

Our data is retrieved from

https://opendata.dc.gov/datasets/DCGIS::urban-forestry-street-trees/about

Loading required packages

```
invisible(lapply(c("tidyverse", "class", "MASS"), library,
        character.only=TRUE))
```

Custom Functions

Loading the data into the R environment

```
forestry.all <- read_csv(file =
        "../01_EDA/data/Urban_Forestry_Street_Trees.csv",
        col_select = c(-36,-37,-40))
```

Dictionary

```
dictionary <- read_csv("../01_EDA/data/forest_dictionary.csv")
```

Column Name Partition

```
# numeric columns
numeric.variables <- forestry.all |> select_if(is.numeric) |>
        colnames()
numeric.variables
```

```
 [1] "X"                "Y"                "WARD"
"TBOX_L"
 [5] "TBOX_W"           "DBH"              "MBG_WIDTH"
"MBG_LENGTH"
 [9] "MBG_ORIENTATION"  "MAX_CROWN_HEIGHT" "MAX_MEAN"
"MIN_CROWN_BASE"
[13] "DTM_MEAN"         "PERIM"            "CROWN_AREA"
"OBJECTID"
```

```
# non-numeric columns
nonnumeric.variables <- forestry.all %>% dplyr::select(where(~
        !is.numeric(.))) %>% colnames()
nonnumeric.variables
```

```
 [1] "SCI_NM"           "CMMN_NM"          "GENUS_NAME"
"FAM_NAME"
 [5] "DATE_PLANT"       "FACILITYID"       "VICINITY"
"WIRES"
 [9] "CURB"             "SIDEWALK"         "TBOX_STAT"
"RETIREDDT"
[13] "DISEASE"          "PESTS"            "CONDITION"
"CONDITIODT"
[17] "OWNERSHIP"        "TREE_NOTES"       "CICADA_SURVEY"
"ONEYEARPHOTO"
[21] "ELEVATION"        "SIGN"             "WARRANTY"
"CREATED_DATE"
[25] "LAST_EDITED_DATE" "GIS_ID"           "SE_ANNO_CAD_DATA"
"GLOBALID"
[29] "CREATED"          "EDITED"           "SHAPE"
```

Variables

Numeric Variables

TBOX_W and TBOX_L

TBOX_W


Tree box width

TBOX_L

Tree box length

```
par(mfrow=c(1,2))
# TBOX_W Histogram
tboxw.sd <- sd(forestry.all[,"TBOX_W"][[1]],na.rm=TRUE)

tboxw.filtered <- forestry.all %>% dplyr::select(TBOX_W) %>%
        filter(TBOX_W < 3*tboxw.sd) %>% pull(TBOX_W)
hist(tboxw.filtered, xlab = "Tree Box Width")
# TBOX_L Histogram
# The point 109328 is actually an erroneous value for a tree
        box on the order of 10^9
tboxl.sd <- sd(forestry.all[,"TBOX_L"][[1]]
        [-109328],na.rm=TRUE)
tboxl.filtered <- forestry.all %>% dplyr::select(TBOX_L) %>%
        filter(TBOX_L < 3*tboxl.sd) %>% pull(TBOX_L)
hist(tboxl.filtered, xlab = "Tree Box Length")
```

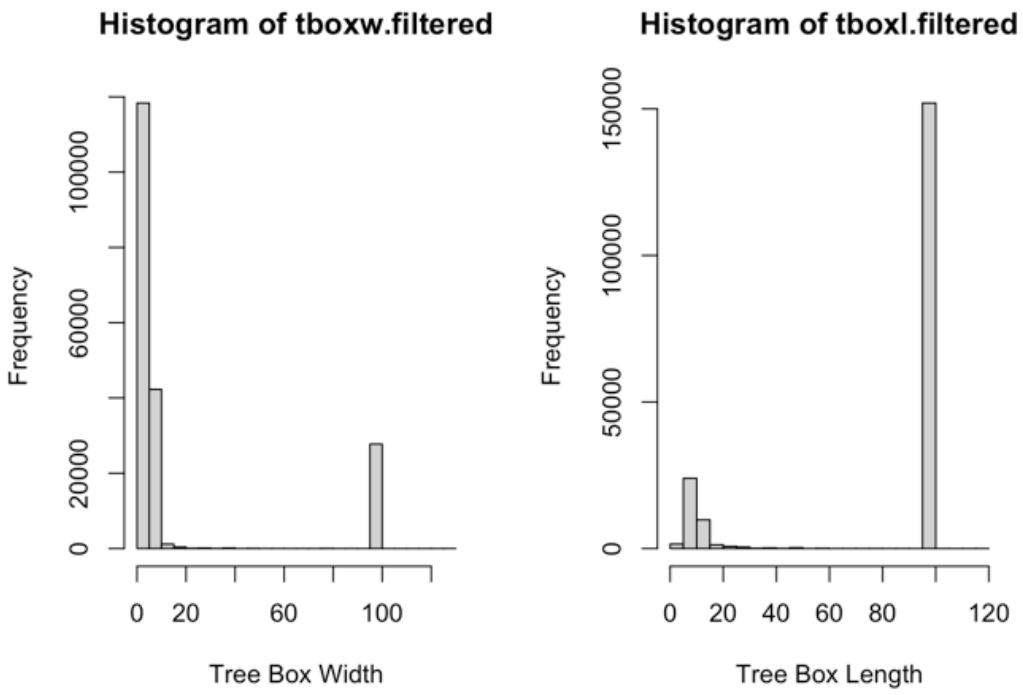

DBH

DBH

Diameter at breast height (This tree girth is commonly measured at 4.5 feet from the soil surface.)

```r
# DBH Histogram
dbh.sd <- sd(forestry.all[,"DBH"][[1]],na.rm=TRUE)
dbh.filtered <- forestry.all %>% dplyr::select(DBH) %>%
        filter(DBH < 3*dbh.sd & DBH >= 0) %>% pull(DBH)
hist(dbh.filtered, xlab = "Diameter at Breast Height")
```



MBG_W and MBG_L

MBG_WIDTH


The horizontal measurement of a tree's foliage and branches, usually defined as the average distance between the outermost driplines on opposite sides of the tree. It serves as a key indicator of tree vigor, competitive capacity, and canopy closure in forestry and ecological studies. Measurements are in feet and were derived from 2020 lidar data.


MBG_LENGTH

The vertical measurement of a tree from the top (highest live foliage) down to the base of the live crown, typically defined as the lowest, non-epicormic, live branch. It represents the active, photosynthetic portion of the tree, indicating its health, vigor, and capacity for growth. Measurements are in feet and were derived from 2020 lidar data.

```r
par(mfrow=c(1,2))
# MBG_WIDTH Histogram
```

```r
mbgw.sd <- sd(forestry.all[,"MBG_WIDTH"][[1]],na.rm=TRUE)
mbgw.filtered <- forestry.all %>% dplyr::select(MBG_WIDTH) %>%
        filter(MBG_WIDTH < 3*mbgw.sd) %>% pull(MBG_WIDTH)
hist(mbgw.filtered, xlab = "Horiz Branch & Foliage Growth (MBG
        W)")
# MBG_LENGTH Histogram
mbgl.sd <- sd(forestry.all[,"MBG_LENGTH"][[1]],na.rm=TRUE)
mbgl.filtered <- forestry.all %>% dplyr::select(MBG_LENGTH) %>%
        filter(MBG_LENGTH < 3*mbgl.sd) %>% pull(MBG_LENGTH)
hist(mbgl.filtered, xlab = "Vert Dist Min Live branch to Apex
        (MBG L)")
```

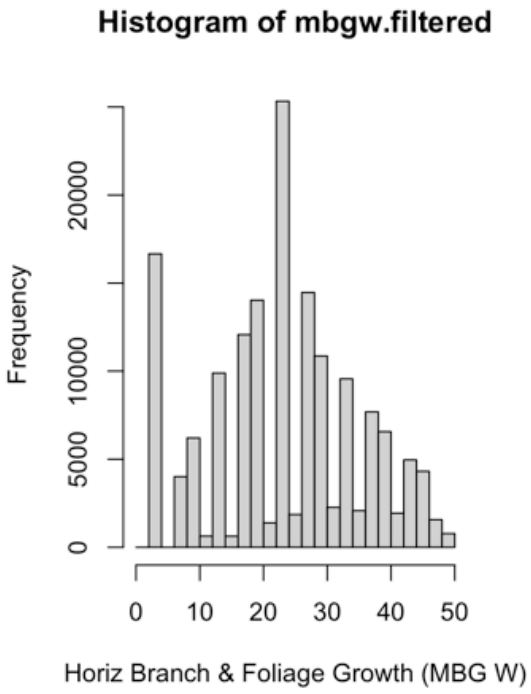

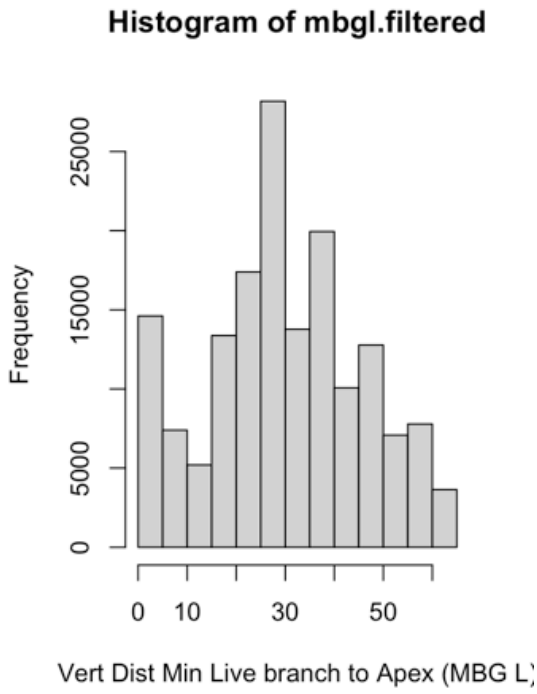

Max Crown Height

MAX_CROWN_HEIGHT

The vertical distance from the base of the lowest live, sustainable branch to the absolute highest point (apex) of a tree. It represents the total vertical extent of the photosynthetic canopy, excluding dead lower branches, and serves as an indicator of tree vigor, health, and age. Measurements are in feet and were derived from 2020 lidar data.


```r
# There is a negative value in the MAX_CROWN_HEIGHT
min(forestry.all$MAX_CROWN_HEIGHT, na.rm=TRUE)
```

```
[1] -1.158132
```

```
match(min(forestry.all$MAX_CROWN_HEIGHT, na.rm=TRUE),
        forestry.all$MAX_CROWN_HEIGHT)
```

```
[1] 160226
```

```
# DBH Histogram
maxcrown.sd <- sd(forestry.all[,"MAX_CROWN_HEIGHT"]
        [[1]],na.rm=TRUE)
maxcrown.filtered <- forestry.all %>%
        dplyr::select(MAX_CROWN_HEIGHT) %>%
        filter(MAX_CROWN_HEIGHT < 3*maxcrown.sd &
        MAX_CROWN_HEIGHT > 0) %>% pull(MAX_CROWN_HEIGHT)
hist(maxcrown.filtered, xlab = "Max Crown Height", main =
        "Histogram of MAX_CROWN_HEIGHT")
```

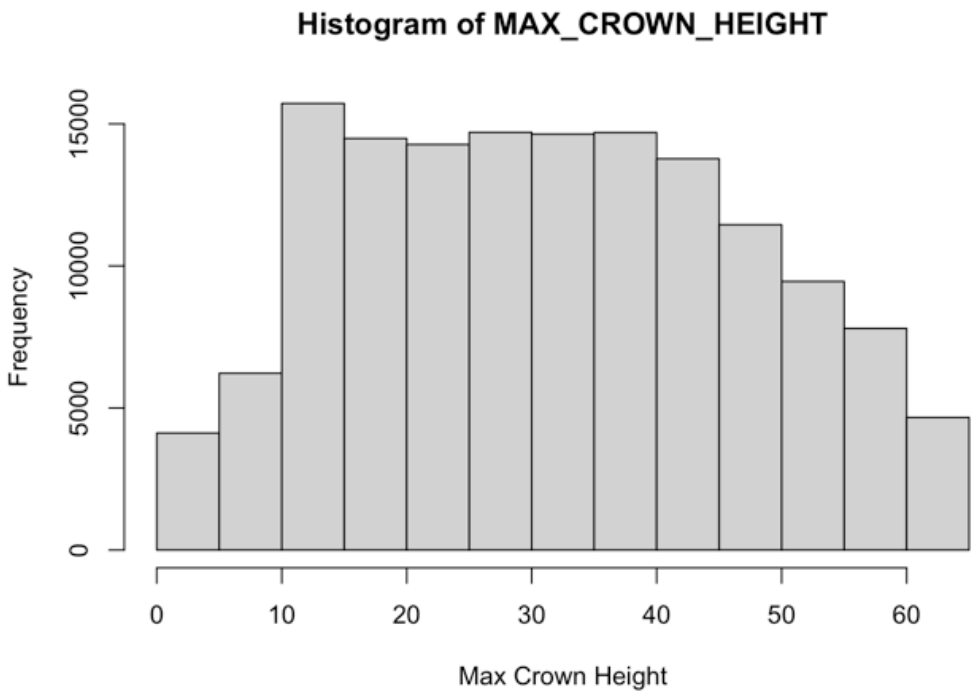

Max Mean

"MAX_MEAN"

The average vertical distance from the base of the live crown (lowest live branches) to the top of the tree, representing the average vertical extent of the foliage across a sample. It indicates tree vigor, shading capability, and competition for light, with larger crowns often signifying better health. Measurements are in feet and were derived from 2020 lidar data.


```
# There is a negative value in the MAX_MEAN variable
min(forestry.all$MAX_MEAN, na.rm=TRUE)
```

```
[1] -1.158132
```

```
match(min(forestry.all$MAX_MEAN, na.rm=TRUE),
        forestry.all$MAX_MEAN)
```

```
[1] 160226
```

```
# Max Mean Histogram
maxmean.sd <- sd(forestry.all[,"MAX_MEAN"][[1]],na.rm=TRUE)
maxmean.filtered <- forestry.all %>% dplyr::select(MAX_MEAN)
        %>% filter(MAX_MEAN < 3*maxmean.sd & MAX_MEAN > 0) %>%
        pull(MAX_MEAN)
hist(maxmean.filtered, xlab = "Max Crown Height")
```

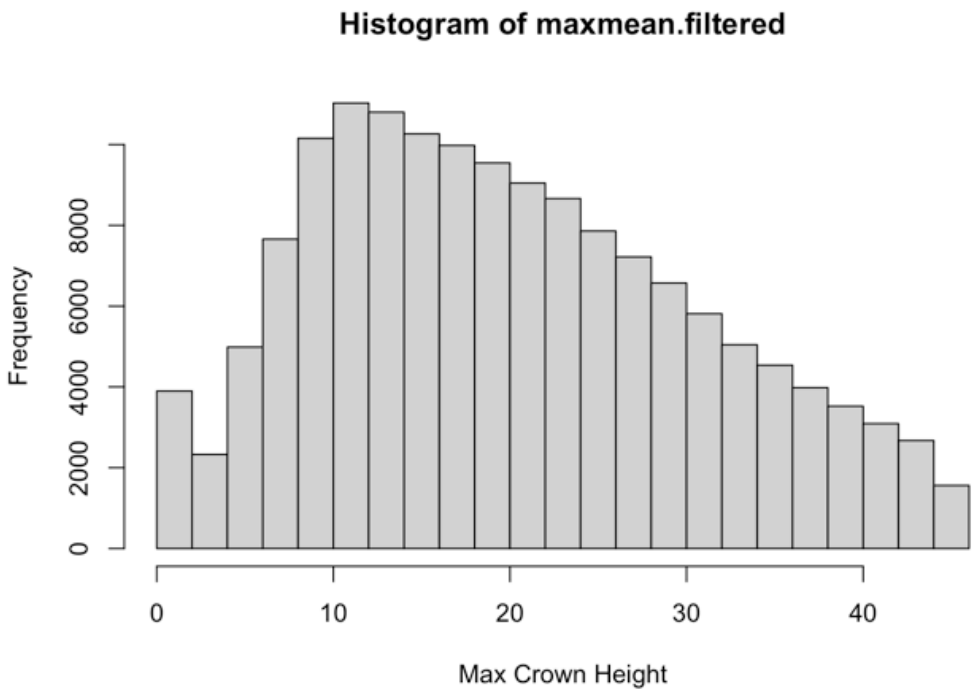


Min Crown Base

MIN_CROWN_BASE

The vertical distance from the ground to the lowest continuous, living branch or foliage whorl on the main stem. It signifies the starting point of the tree's productive canopy, excluding epicormic sprouts and lower, dying branches. Measurements are in feet and were derived from 2020 lidar data.

```
# MIN_CROWN_BASE Histogram
```

```
plothist("MIN_CROWN_BASE",forestry.all,xAxisLabel = "Vert Dist
        from Ground to Live Main Stem", title="Histogram of
        MIN_CROWN_BASE")
```

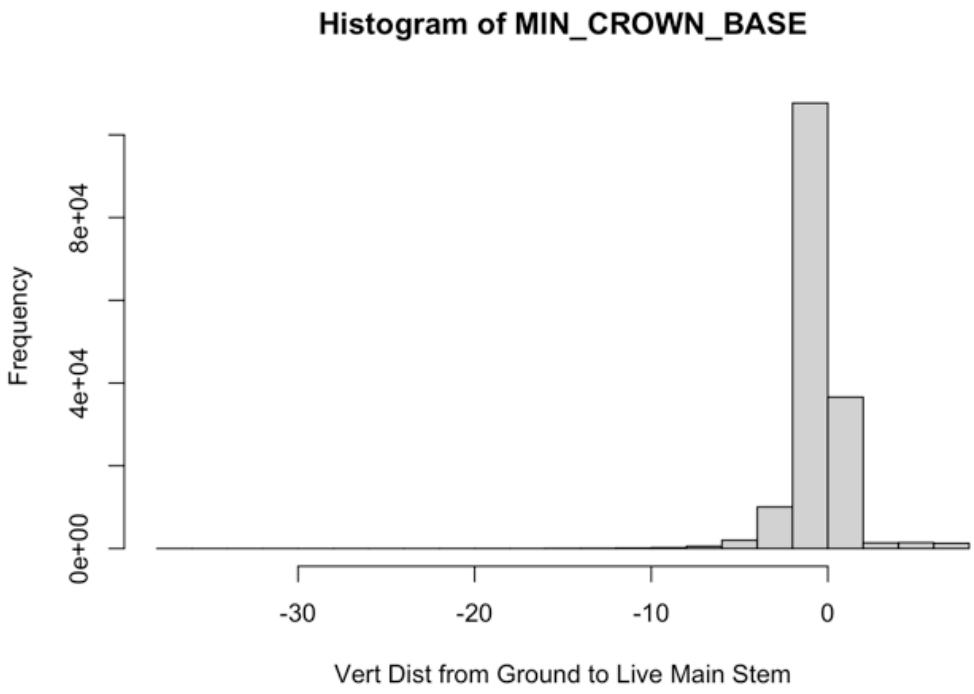


DTM Mean

DTM_MEAN

Refers to the specific point where the base of a tree's trunk (the root collar) meets the surrounding ground surface. This measurement serves as the baseline for determining total tree height, typically measured from the ground up to the highest living branch. Measurements are in feet and were derived from 2020 lidar data.

```
# MIN_CROWN_BASE Histogram
plothist("DTM_MEAN",forestry.all,xAxisLabel = "Root Collar
        Meets Ground Surface", title="Histogram of DTM Mean")
```

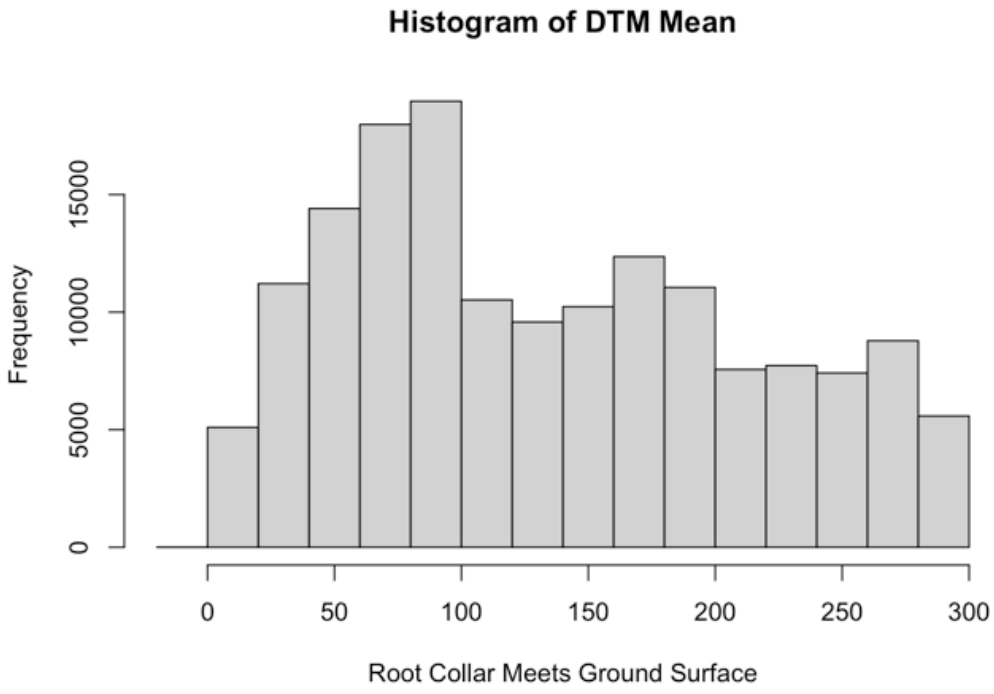


PERIM

PERIM

The outermost boundary of a tree's branches and foliage projected onto the ground. It represents the total horizontal width or extent of the canopy, commonly measured by identifying the widest diameter and a second diameter at 90 degrees. Measurements are in feet and were derived from 2020 lidar data.

```
# MIN_CROWN_BASE Histogram
plothist("PERIM",forestry.all,xAxisLabel = "Projection of Tree
        Outer Boundary", title="Histogram of PERIM")
```

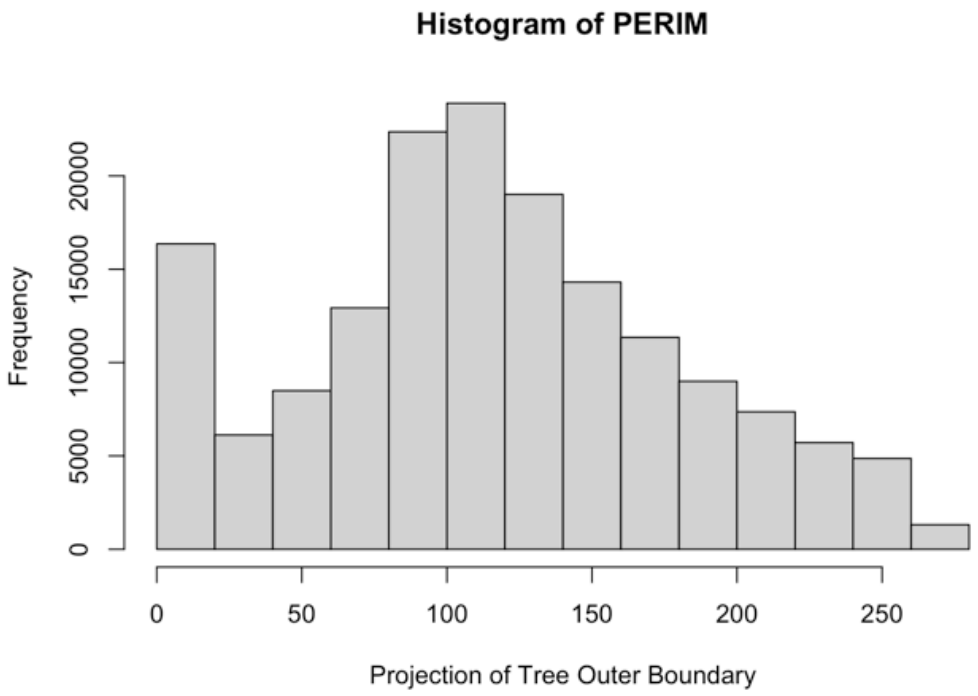


Crown Area

CROWN_AREA

The upper, leafy portion of a tree comprising branches, foliage, and reproductive parts extending from the main trunk. As the primary site for photosynthesis, it acts as the interface for light, water, and gas exchange, with its spread often measured to the outer dripline. Measurements are in square feet and were derived from 2020 lidar data.

```
# MIN_CROWN_BASE Histogram
plothist("CROWN_AREA",forestry.all,xAxisLabel = "Crown Area:
        Leafy Upper Portion of Tree", title="Histogram of
        CROWN_AREA")
```

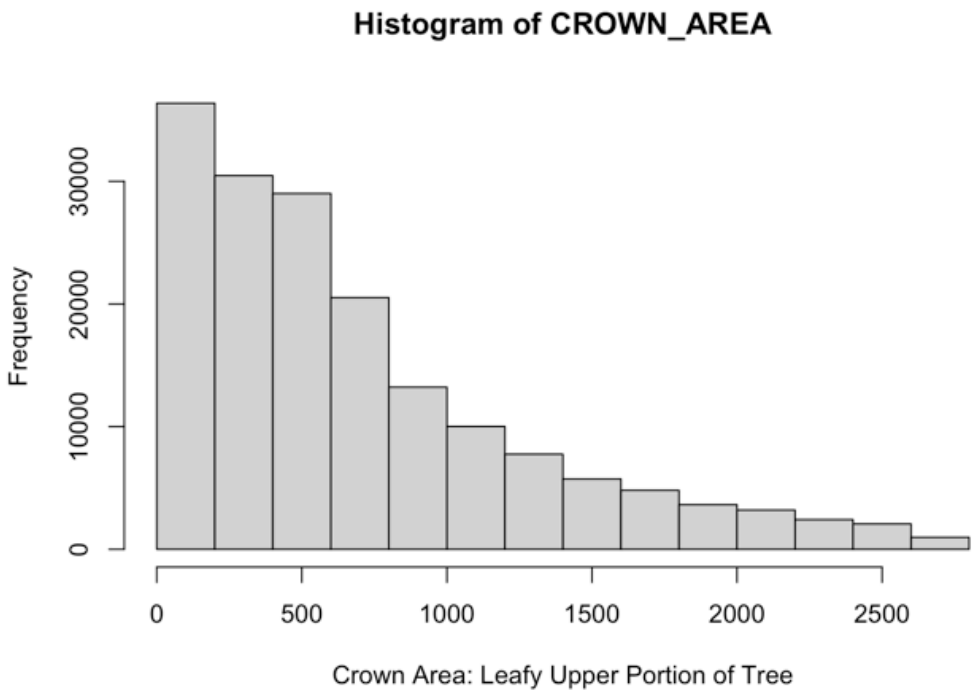

Nonnumeric Variables

Nonnumeric Column Names

Condition

```
forestry.all |> dplyr::select(CONDITION) |> unique()
```

```
forestry.all |> dplyr::select(CONDITION) |>
        filter(!is.na(CONDITION)) |> nrow()
```

Model Selection


Data Subsetting and Simplification

The data is simplified to have no NAs to test the execution of the models we have selected. Ideally missing data will be imputed with the Multiple Imputation with Chained Equations function from the `mice` package.


```
forestry.all |> dplyr::select(DBH, MBG_WIDTH, MBG_LENGTH,
        TBOX_L, TBOX_W, MAX_CROWN_HEIGHT, MAX_MEAN,
        MIN_CROWN_BASE, DTM_MEAN, PERIM, CONDITION) |>
        summarise(across(everything(), ~ sum(is.na(.))))
```

```
# Create forestry.initital data frame
forestry.all |> dplyr::select(CONDITION, DBH, MBG_WIDTH,
        MBG_LENGTH, TBOX_L, TBOX_W, MAX_CROWN_HEIGHT,
        MAX_MEAN, MIN_CROWN_BASE, DTM_MEAN, PERIM) |>
        drop_na() |> relocate(CONDITION) -> forestry.initial
```


```
GGally::ggpairs(forestry.initial[2:5], progress=FALSE)
```

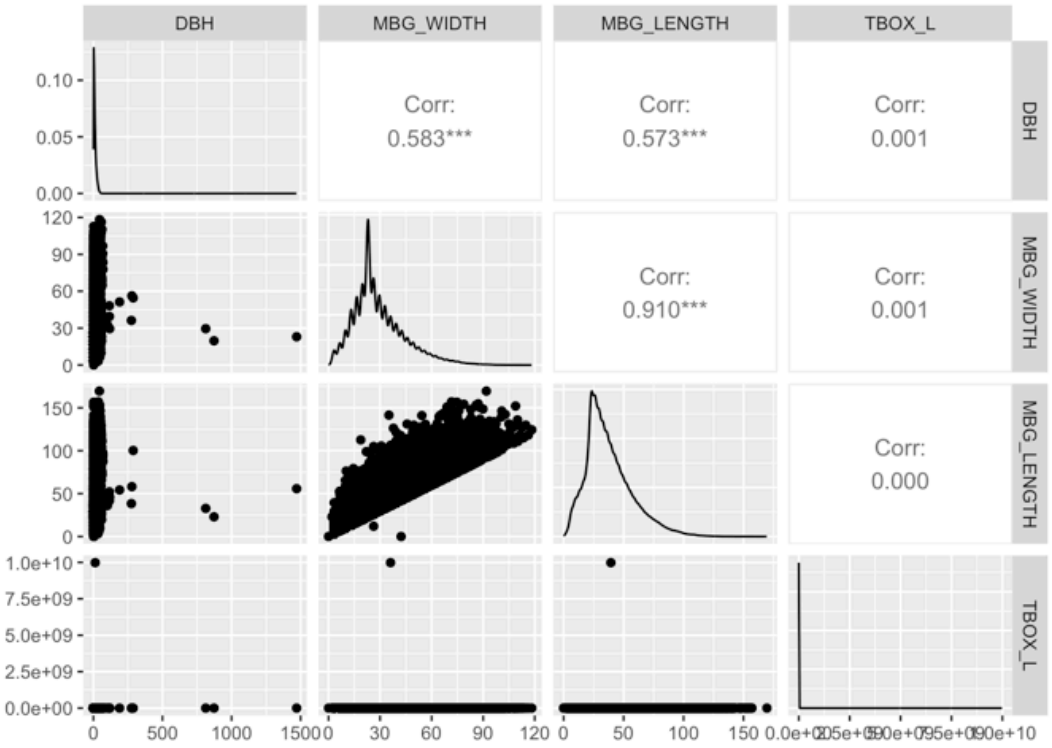


```
GGally::ggpairs(forestry.initial[5:8], progress=FALSE)
```

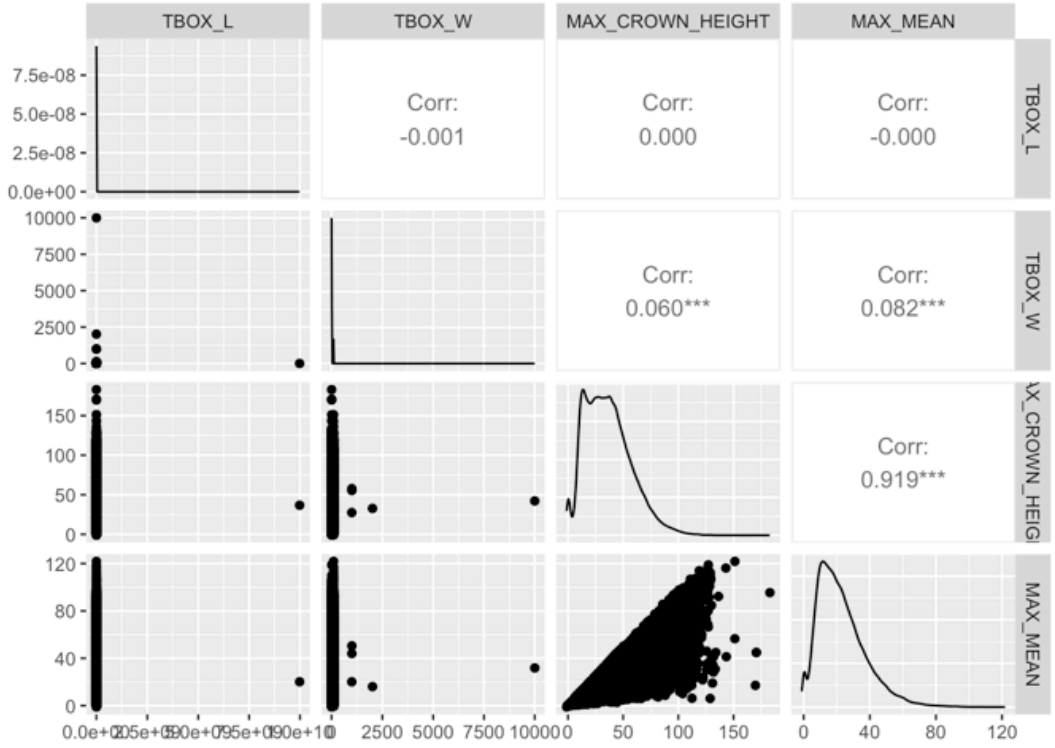


```
GGally::ggpairs(forestry.initial[,c(1,9,10,11)],
        progress=FALSE)
```

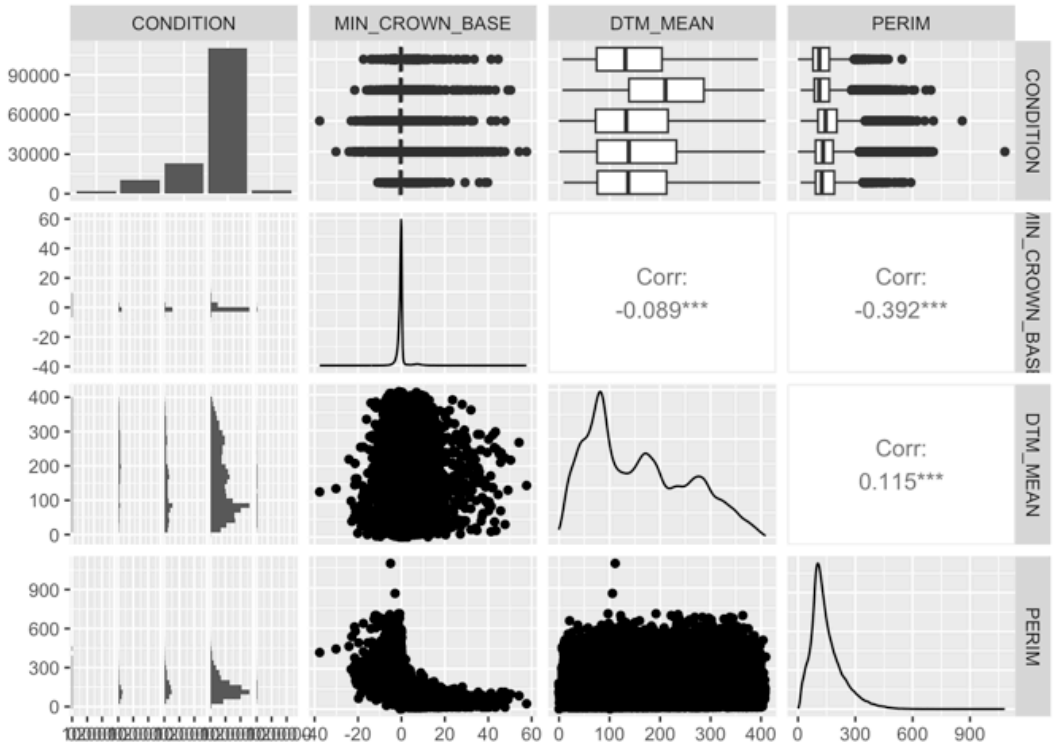

KNN

We try a simplified attempt at KNN classification on the data.

```
# KNN implemenation from homework

set.seed(1234)

training_pct <- 0.70

Z <- sample(nrow(forestry.initial),
        floor(training_pct*nrow(forestry.initial)))

Xtrain_unscaled <- as.data.frame(forestry.initial[Z,
        2:ncol(forestry.initial)])

Xtrain <- as.data.frame(scale(Xtrain_unscaled))  # Our training
        set X

Ytrain <- forestry.initial$CONDITION[Z] # Our training set y

Xtest_unscaled <- forestry.initial[-Z,
        2:ncol(forestry.initial)]

Xtest <- Xtest_unscaled

for (j in 1:ncol(Xtest)){
  Xtest[, j] <- (Xtest_unscaled[, j] - mean(Xtrain_unscaled[,
        j]))/sd(Xtrain_unscaled[, j])
}

Yhat <- class::knn(Xtrain, Xtest, Ytrain, k = 9)

Ytest <- forestry.initial$CONDITION[-Z]

conf_matrix <- table(Ytest, Yhat)
conf_matrix
```

```
           Yhat
Ytest        Dead Excellent  Fair  Good  Poor
  Dead         14        21    25   598     2
  Excellent     2       232    44  2775     0
  Fair          6        60   403  6327     3
  Good         11       400   782 31889    10
  Poor          3        13    46   783     7
```

LDA

A simplified attempt at LDA is implemented accodring to our prior homework

asisgnment.

```
set.seed(1234)

train.ratio = 7/10

sample.index = sample(x = 1:nrow(forestry.initial), size =
        floor(train.ratio*nrow(forestry.initial)))

forestry.initial.train <- forestry.initial[sample.index,]
forestry.initial.test <- forestry.initial[-sample.index,]

lda.training.model <- lda(CONDITION ~ . - CONDITION, data =
        forestry.initial.train)

lda.predictions <- predict(lda.training.model, newdata =
        forestry.initial.test)

table(forestry.initial.test$CONDITION,lda.predictions$class)
```

```
           Dead Excellent  Fair  Good  Poor
  Dead        0         0     1   659     0
  Excellent   0         0     0  3053     0
  Fair        0         0     2  6797     0
  Good        2         0    10 33080     0
  Poor        0         0     0   852     0
```

QDA

A simplified QDA model is implemented as a proof of concept.

```
qda.training.model <- qda(CONDITION ~ . - CONDITION, data =
        forestry.initial.train)

qda.predictions <- predict(qda.training.model, newdata =
        forestry.initial.test)

table(forestry.initial.test$CONDITION,qda.predictions$class)
```


```
           Dead Excellent  Fair  Good  Poor
  Dead       53       220   355     0    32
  Excellent  74      1854  1117     0     8
  Fair      202      1153  5353     1    90
  Good      863      7994 24076     2   157
  Poor       42       202   561     0    47
```

Logistic Regression

If the condition variable is simplified to a binary outcome we can implement a logistic regression to test the quality of the results.

This would require placing the fair status either in the Good/Excellent category, or the Poor/Dead category. We could attempt to tune our model by seeing which of these category assignemnts leads to a better classification as well.

Appendix

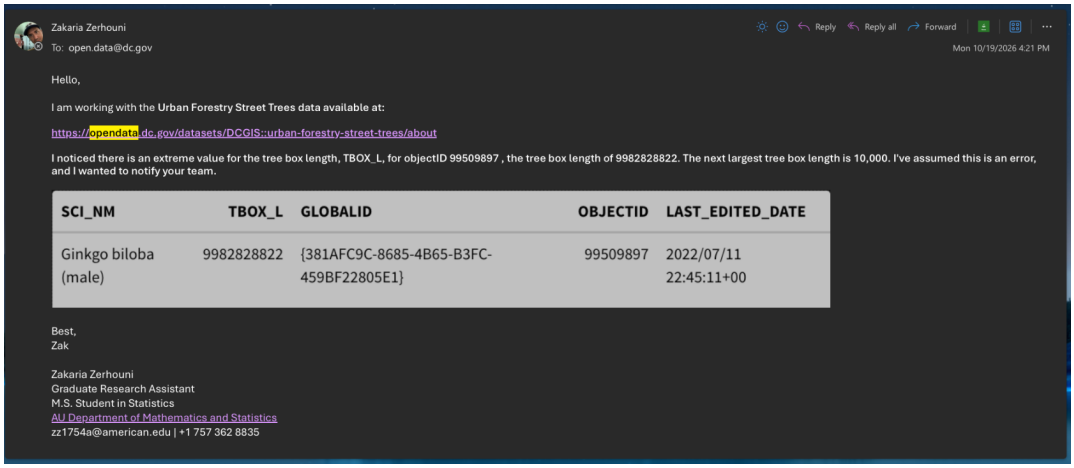

Zakaria Zerhouni
To: open.data@dc.gov

Reply | Reply all | Forward
Mon 10/19/2026 4:21 PM

Hello,

I am working with the **Urban Forestry Street Trees data available at:**

https://opendata.dc.gov/datasets/DCGIS::urban-forestry-street-trees/about


I noticed there is an extreme value for the tree box length, TBOX_L, for objectID 99509897 , the tree box length of 9982828822. The next largest tree box length is 10,000. I've assumed this is an error, and I wanted to notify your team.

SCI_NM	TBOX_L	GLOBALID	OBJECTID	LAST_EDITED_DATE
Ginkgo biloba (male)	9982828822	{381AFC9C-8685-4B65-B3FC-459BF22805E1}	99509897	2022/07/11 22:45:11+00

Best,
Zak

Zakaria Zerhouni
Graduate Research Assistant
M.S. Student in Statistics
AU Department of Mathematics and Statistics
zz1754a@american.edu | +1 757 362 8835

First Message to DC Open Data

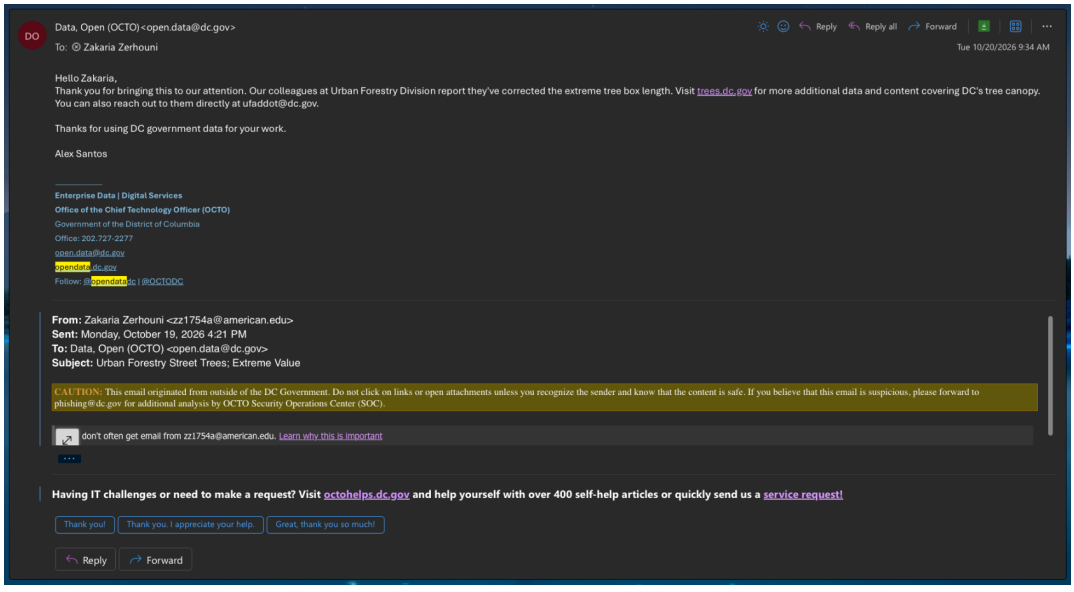

Data, Open (OCTO) <open.data@dc.gov>
To: Zakaria Zerhouni

Reply | Reply all | Forward
Tue 10/20/2026 9:34 AM

Hello Zakaria,
Thank you for bringing this to our attention. Our colleagues at Urban Forestry Division report they've corrected the extreme tree box length. Visit trees.dc.gov for more additional data and content covering DC's tree canopy. You can also reach out to them directly at ufaddot@dc.gov.

Thanks for using DC government data for your work.

Alex Santos

Enterprise Data | Digital Services
Office of the Chief Technology Officer (OCTO)
Government of the District of Columbia
Office: 202.727-2277
open.data@dc.gov
opendata.dc.gov
Follow: @opendatadc | @OCTODC

From: Zakaria Zerhouni <zz1754a@american.edu>
Sent: Monday, October 19, 2026 4:21 PM
To: Data, Open (OCTO) <open.data@dc.gov>
Subject: Urban Forestry Street Trees; Extreme Value

CAUTION: This email originated from outside of the DC Government. Do not click on links or open attachments unless you recognize the sender and know that the content is safe. If you believe that this email is suspicious, please forward to phishing@dc.gov for additional analysis by OCTO Security Operations Center (SOC).

don't often get email from zz1754a@american.edu. Learn why this is important

Having IT challenges or need to make a request? Visit octohelps.dc.gov and help yourself with over 400 self-help articles or quickly send us a service request!

Thank you! | Thank you. I appreciate your help. | Great, thank you so much!

Reply | Forward

Reply From DC Open Data