

TEST COMPLETION REPORT · MOBILE REGRESSION · IOS

Concert Technologies Field Technicians iOS App – Test Completion Report

INTERNAL

● NO UNEXPECTED FAILURES

Nothing failed that is not already a known defect: the 5 red tests are the regression checks of 5 filed defects and stay red until they are fixed; 4 tests could not run (Blocked), each with its reason below – Blocked is never counted as passed.

Checklist now (this run): 449 green · 6 red, each held by a known defect · 7 blocked · 0 red and unexplained.

RUN FINISHED	OPERATING SYSTEM	DEVICE	APP BUILD
2026-09-28 04:13 UTC · 1 h 26 min	iOS 26.5	iPhone 17 – simulator	Concert Technologies – [DEV] CT Mobile · 1.1.1 (178) · debug build
APP TYPE	APP SOURCE	HARNESS CODE	TESTS RUN
Flutter	development @ 85a84f3 (2026-08-26)	886de04	124 · 5 red · 4 blocked · 0 unexpected
REPORT GENERATED			
2026-10-05 12:35 UTC			

Document. Version of 2026-09-28 (the run this report describes) · Source: [automation/mobile/reports/ios/internal/index.html](#) · Online: <https://claude.ai/artifact/Vh4DJSdzZmaGH7fwRMUbde> · PDF: [ConcertTechnologies_FieldTechnicians_iOS_TestCompletionReport_INTERNAL_2026-09-28.pdf](#) · Confidential, TRIARE internal.

Summary

The QA checklist for the mobile app holds **645** checks across 12 modules. **462** of them (72%) are automated and ran on iPhone 17 – simulator, iOS 26.5. In this run **449** passed; **6** are held red by 5 open defects, each with a test that fails until the defect is fixed; **7** could not run for a stated reason. Nothing failed unexpectedly. The other **183** checks are not automated, each for a written reason (below).

645

checks in the QA
checklist

462

automated · 72%

449

passed in this run

6

held red by 5 known
defects

7


blocked – could not
run




■ passed ■ held red by a known defect ■ blocked – could not run ■ not automated (reason written)

What the tests saw


One screen per module, saved by a passing test at a checkpoint. Tap a screen to enlarge it;
each module page has every screen next to the check it belongs to.

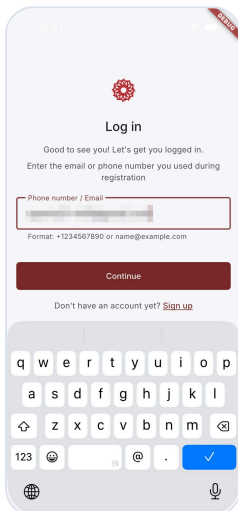


02 · Authentication –
login-filled

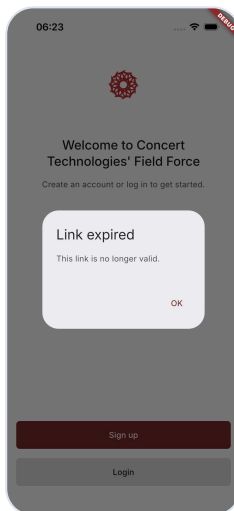


03 · Order list – link-
expired-signed-out

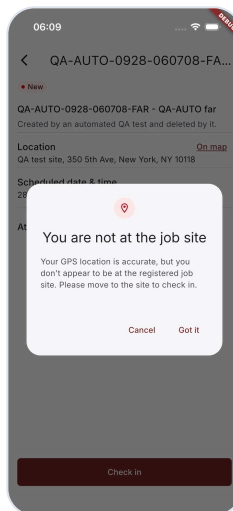


04 · Order details –
not-at-the-job-site

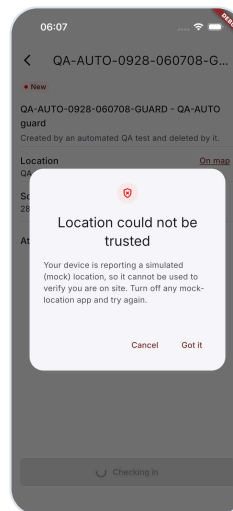


05 · Check in out –
mock-location-
refused

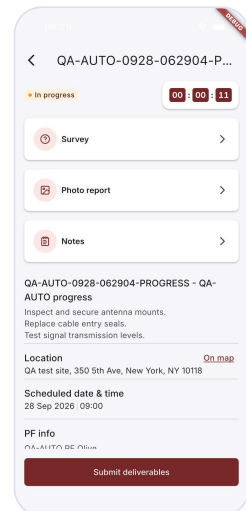


06 · Order progress –
in-progress-top

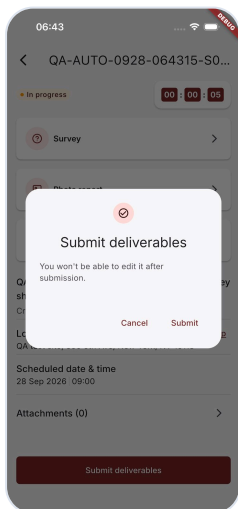


07 · Submit
deliverables –

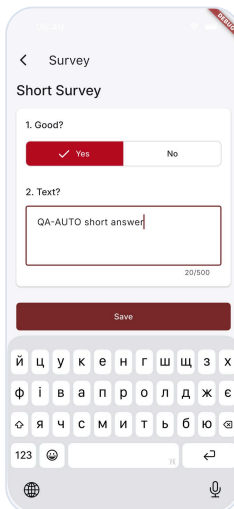


08 · Survey – short-
filled

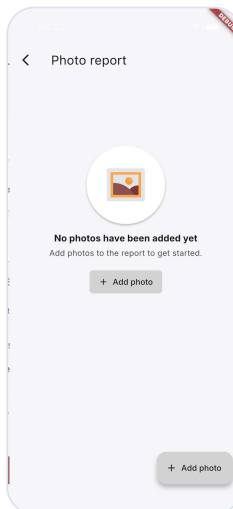


09 · Photo report –
photo-report-empty

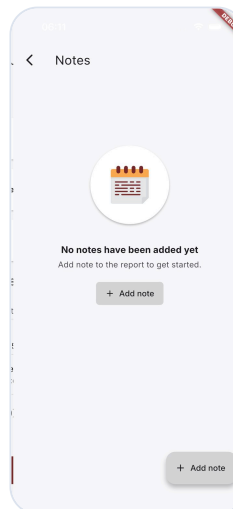

10 · Notes – notes-
empty

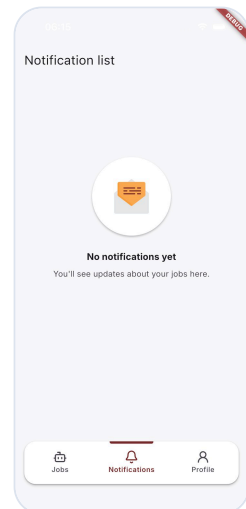

11 · Notifications –
notifications-empty

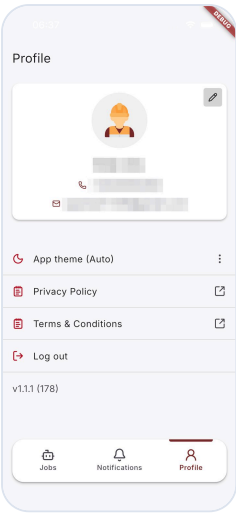

12 · Profile — profile-first-open

By module

MODULE	CHECKS	AUTOMATED	PASSED	HELD RED	BLOCKED	NOT AUTOMATED	COVERAGE
01 · Splash	15	9	8	1	0	6	
02 · Authentication	126	81	80	1	0	45	
03 · Order list	70	52	46	4	2	18	
04 · Order details	89	56	55	0	1	33	
05 · Check in out	41	25	25	0	0	16	
06 · Order progress	42	31	28	0	3	11	
07 · Submit deliverables	33	28	27	0	1	5	
08 · Survey	57	46	46	0	0	11	
09 · Photo report	54	34	34	0	0	20	
10 · Notes	52	41	41	0	0	11	
11 · Notifications	31	26	26	0	0	5	
12 · Profile	35	33	33	0	0	2	

What needs a decision

- The priority of 7 open defects is QA's proposal — the owner / PM decide: [BUG-SPL-001](#), [BUG-SPL-002](#), [BUG-AUTH-001](#), [BUG-AUTH-002](#), [BUG-AUTH-003](#), [BUG-ORDL-001](#), [BUG-ORDL-003](#)

Open defects · 8

5 of them hold checklist checks red through their regression tests; a defect with no such test is listed with a dash (its report says why).

S3 minor: 6 · **S4** cosmetic: 2. Every defect is filed locally, in the repository; no tracker is configured.

DEFECT	MODULE	WHAT IS WRONG	SEVERITY	PRIORITY	CHECKS HELD RED
BUG-AUTH-003	02 · Authentication	After a connection error on the code screen, Verify does nothing until a digit is changed	S3 minor	P2 proposed	— (no test holds a check red)
BUG-SPL-001	01 · Splash	A deleted account stays signed in: the app keeps opening the Jobs list and the profile after a cold start	S3 minor	P2 proposed	SPL-009
BUG-AUTH-001	02 · Authentication	Login with an unregistered phone number shows a generic error instead of "not registered"	S3 minor	P3 proposed	AUTH-122
BUG-ORDL-001	03 · Order list	The weekly calendar keeps showing "No jobs" for jobs the refreshed Jobs list already shows	S3 minor	P3 proposed	ORDL-070
BUG-ORDL-003	03 · Order list	"Updated" stays on a job after its details were opened, until the calendar is refreshed	S3 minor	P3 proposed	ORDL-022, ORDL-056

DEFECT	MODULE	WHAT IS WRONG	SEVERITY	PRIORITY	CHECKS HELD RED
BUG-ORDL-002	03 · Order list	The Jobs list is ordered by when a job was created, not by its scheduled date	S3 minor	P4	ORDL-069
BUG-SPL-002	01 · Splash	Android: the system Back on the splash screen leaves the app	S4 cosmetic	P3 proposed	– (no test holds a check red)
BUG-AUTH-002	02 · Authentication	Registration caps first and last name at 50 characters while the SRS allows 100	S4 cosmetic	P4 proposed	– (no test holds a check red)

Each defect has a report with steps, the expected and actual result, screenshots and its regression test, under [qa/mobile/<module>/bugs/](#).

Could not run · 7 checks

4 tests stopped before their check could decide anything. Blocked is not a pass: the check stays owed and runs again in the next round – or on the Android stage, where the reason says so.

TEST	WHAT IT DOES	CHECKS	WHY
TC-ORDD-004	Tapping the PF phone opens the dialer with the number	ORDD-017	iOS simulator limitation – there is no Phone app, the tap cannot open a dialer (owner, 2026-09-24, Q-ORDD-3). Runs in full on the Android emulator.
TC-ORDL-012	Mismatch dialog: Cancel keeps the session, Log out ends it	ORDL-007, ORDL-008	iOS simulator testing specific – the mismatch dialog closes by itself ~0.6 s after it appears (recon 4, 4 of 4); on a device it stays until a button is tapped (owner, 2026-09-24, Q-ORDL-8). Runs in full on Android.
TC-ORDP-006	The PF phone on the In progress screen opens the dialer	ORDP-016	iOS simulator limitation – there is no Phone app, the tap cannot open a dialer (owner, 2026-09-24, as Q-ORDD-3). Runs in full on the Android emulator.

TEST	WHAT IT DOES	CHECKS	WHY
TC-DLV-004	The app's reaction to a successful submission: 'Deliverables sent to review successfully', 'Successful', then Check out, locked at once	DLV-020, ORDP-026, ORDP-027	DEV answers POST /job/{id}/submit with 500 although the submission is recorded (COPS; owner, Q-DLV-5, 2026-09-26) – the app shows 'Server error. Try again later.', so its reaction to a successful submission cannot be observed

Why 183 checks are not automated

Every one of them has a reason in its module's automation plan, test cases or an owner decision; `qa/mobile/ios/not-automated.md` collects them and the page sorts them into the kinds below. The full list, check by check, is in the technical detail.

REASON	WHAT IT MEANS	CHECKS
Offline – waits for the Android stage	A test cannot switch the iOS simulator's network off; the Android emulator's can, so these run in step 7	36
Deferred – can be automated later	Right as worded and automatable; left out of the first pass by scope (Auth was a narrow pilot)	36
Kept manual by the owner	The owner ruled these stay manual checks; most were run by hand on iOS, a real device or production (the reason says which)	32
A person's check	A judgement no assertion can make, or something the accessibility tree does not show: design, motion, an icon, a 0.3-second banner	24
The app works differently – accepted	The checklist describes a control or a flow the app does not have; the owner accepted the app's behaviour	15
Beyond the simulator or outside the app	Needs hardware the simulator lacks (camera, a failed location fix) or the system's own screens (share sheet, other apps)	15
Failures a test cannot cause	A save, upload or navigation failure needs the app's storage or network broken mid-action	10
Not observable from the app on DEV	The outcome happens where neither the app nor the DEV API shows it: e-mail to a facilitator, a server schedule, a hard-coded DEV code	9
Requirement unclear or a placeholder	The item names no checkable outcome ("if allowed by business logic")	3

REASON	WHAT IT MEANS	CHECKS
Load on DEV excluded	Load and performance are not run against the shared DEV server (decision 2026-09-23)	2
Covered by another check	Proved by a neighbouring check	1

Stability and run history


The last **2** full runs gave the same verdict for every one of **124** tests – nothing flaky. Retries are off, so a flaky test could not hide behind a second attempt.

RUN	FINISHED (UTC)	HARNESS	TIME	TESTS	PASSED	RED	UNEXPECTED	BLOCKED	VI
stable-2	2026-09-28 02:45	886de04	1 h 26 min	124	115	5	0	4	
stable-1	2026-09-28 01:17	7673885 (uncommitted changes)	1 h 26 min	124	115	5	0	4	
final-2	2026-09-27 13:13	e4abaf8	1 h 18 min	124	114	6	1	4	
final-1	2026-09-27 11:15	a9b20d4	1 h 18 min	124	113	7	2	4	

Full-app runs only. **Red** counts every failed test; **Unexpected** is the part no filed defect names as its regression check. final-1 and final-2 were earlier attempts at the final run: the red there beyond the filed defects came from harness defects, each fixed before the series restarted. stable-1...3 ran the same harness code, 7015c46.

Delivery pace

The first module's tests landed in git on 23 September 2026, 16:12, the last on 27 September 2026, 12:19 (UTC+03:00) – 12 modules and 462 automated checks in about 92 hours of calendar time. Each step on the line is one commit that first added a module's test file; its height is the checks that module automates today. These are commit times, not hours of effort: the repository was set up on 22 September, and the harness, the checklist import and the recon on the simulator came first; each module's review and fixes continued after it landed.

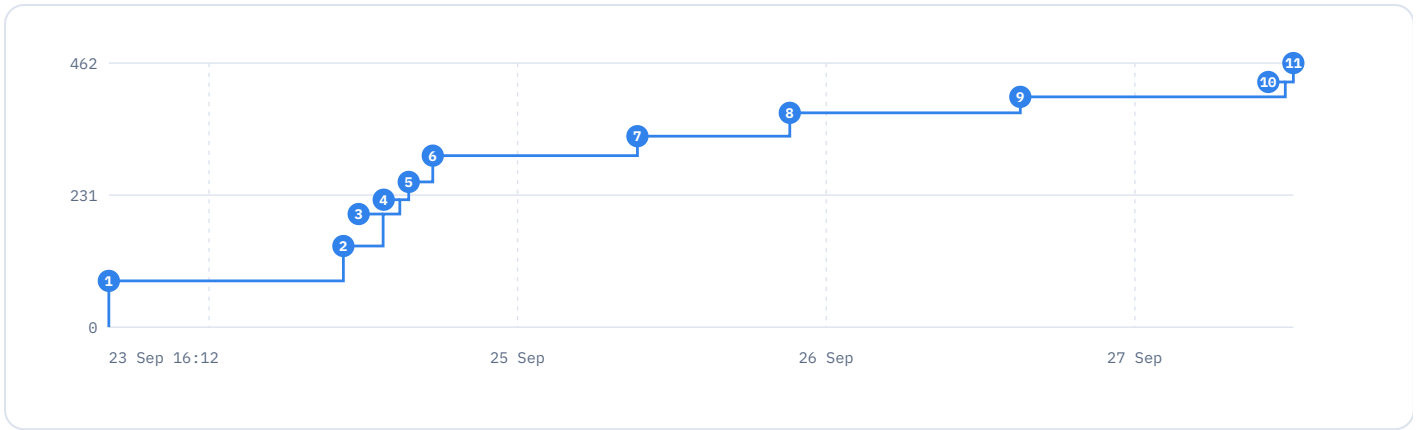

1. 02 · Authentication

+81 · 23 Sep 16:12
2. 03 · Order list

+01 · 24 Sep 10:26
3. 04 · Order details

+56 · 24 Sep 13:32
4. 05 · Check in out

+25 · 24 Sep 14:50
5. 06 · Order progress

+31 · 24 Sep 15:31
6. 08 · Survey

+46 · 24 Sep 17:23
7. 09 · Photo report

+34 · 25 Sep 09:18
8. 10 · Notes

+41 · 25 Sep 21:09
9. 07 · Submit deliverables

+28 · 26 Sep 15:05
10. 11 · Notifications

+26 · 27 Sep 11:42
11. 12 · Profile

+33 · 27 Sep 12:19

Technical detail

How a verdict is decided

- **Passed** only when an assertion with a named oracle decided it: the checklist or the SRS, the app's accessibility tree, the pixels of a screenshot (a colour, the theme's brightness) or the DEV API's copy of what the app saved.
- **Held red**: a filed defect's regression test asserts the correct behaviour and fails until the fix; its report names the test. A fix turns it green by itself.
- **Blocked** (4 in this run) — a precondition the simulator or DEV cannot give — is never green and never silent; each says why.
- No retries. One Appium session per run. Every test was proven red once by breaking its own expectation (`--prove-red`) before it was trusted.

Where to look

- Every check, its test and the screens it saw: open a module in the table under Summary; each defect's report opens from Open defects.
- Every step of every test: the Tests list at the bottom of a module page, or Allure — `allure open automation/mobile/reports/ios/allure-report` .
- Traceability of record: `qa/mobile/ios/final-traceability.md` and `qa/mobile/<module>/ios/<module>-traceability.md` .
- Why a check is not automated: `qa/mobile/ios/not-automated.md` ; owner rulings: `docs/notes/decisions.md` .
- This page: `automation/tools/mobile_summary.py` .

Scope of this run

- Device: iPhone 17 · iOS 26.5.
- App: Concert Technologies — [DEV] CT Mobile 1.1.1 (178), built from development @ 85a84f3 (2026-08-26).
- Driver: Appium with XCUITest — the Flutter app is read through the iOS accessibility tree; one test at a time, the app relaunched or reset by each test's preconditions.
- Tools: Appium 3.4.2 · XCUITest 11.7.4 (installed on the QA machine when this report was built).
- DEV only; production is never tested. The API is used to create test data, clean up and check what the app stored — API tests are out of scope.
- Test data is created, marked (QA-AUTO-...) and deleted by the tests; a throwaway technician is registered and removed; the main test account's name and theme are put back.

How it is built

- Checklist → automation plan → the owner's answers to D / Q questions → recon on the simulator → structured test cases → screen maps (the only place a locator lives) → page objects → pytest tests tagged with checklist ids → generated traceability.
- Each module went through a test review (`/bmad-testarch-test-review`) before it was called done.
- Evidence: named screenshots at checkpoints, a screenshot on failure, a screen video of failed and end-to-end tests.
- This is the shared copy: the test account's email, phone and name are hidden in the text and pixelated on the screens; API response bodies, page sources and screen videos are left out (they stay in Allure on the QA machine).

Every check that is not automated, and why · 183

► 01 · Splash · 6

► 02 · Authentication · 45

► 03 · Order list · 18

► 04 · Order details · 33

► 05 · Check in out · 16

► 06 · Order progress · 11

► 07 · Submit deliverables · 5

► 08 · Survey · 11

► 09 · Photo report · 20

► 10 · Notes · 11

► 11 · Notifications · 5

► 12 · Profile · 2

Generated by `automation/tools/mobile_summary.py` from the repository, 2026-10-05 12:35 UTC. Every number above is read from the Allure results of the run, the checklists, the bug reports, `qa/mobile/ios/not-automated.md` and git.