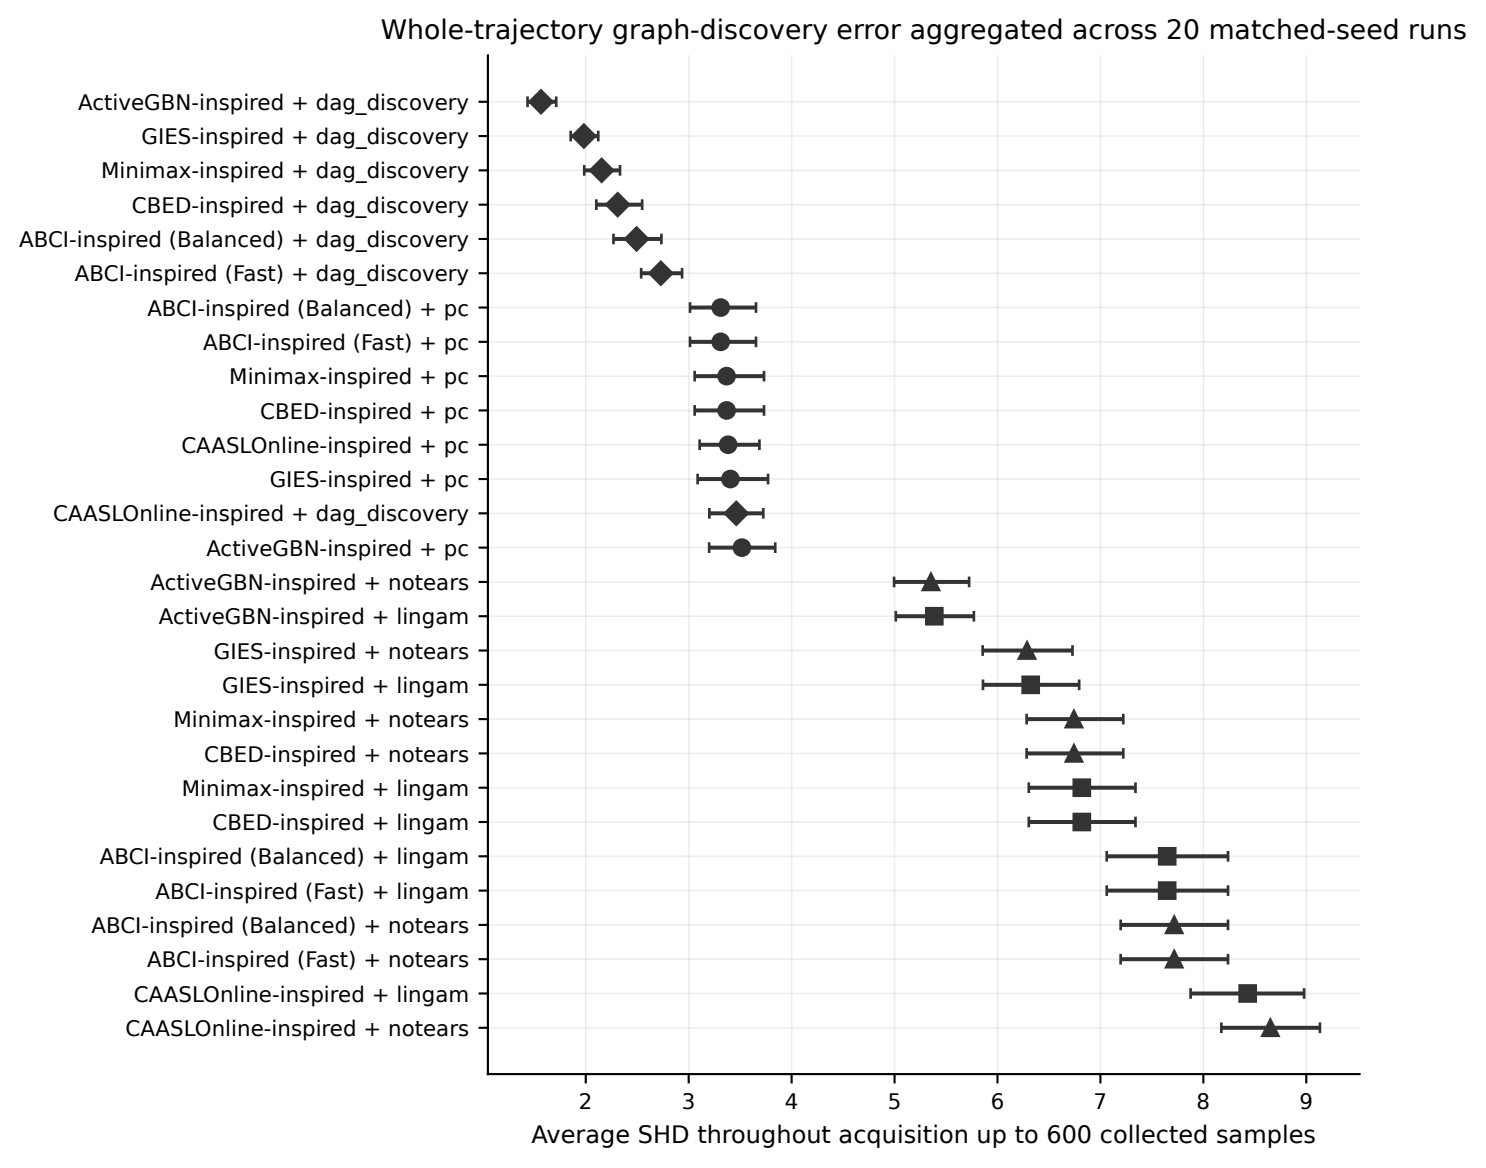
Whole-trajectory graph-discovery error aggregated across 20 matched-seed runs
ActiveGBN-inspired + dag_discovery
GIES-inspired + dag_discovery
Minimax-inspired + dag_discovery
CBED-inspired + dag_discovery
ABCI-inspired (Balanced) + dag_discovery
ABCI-inspired (Fast) + dag_discovery
ABCI-inspired (Balanced) + pc
ABCI-inspired (Fast) + pc
Minimax-inspired + pc
CBED-inspired + pc
CAASLOnline-inspired + pc
GIES-inspired + pc
CAASLOnline-inspired + dag_discovery
ActiveGBN-inspired + pc
ActiveGBN-inspired + notears
ActiveGBN-inspired + lingam
GIES-inspired + notears
GIES-inspired + lingam
Minimax-inspired + notears
CBED-inspired + notears
Minimax-inspired + lingam
CBED-inspired + lingam
ABCI-inspired (Balanced) + lingam
ABCI-inspired (Fast) + lingam
ABCI-inspired (Balanced) + notears
ABCI-inspired (Fast) + notears
CAASLOnline-inspired + lingam
CAASLOnline-inspired + notears
2
3
4
5
6
7
8
9
Average SHD throughout acquisition up to 600 collected samples