


Tarea de punteros en C

```
int x = 7, y = 20, *m, *n, *k;
```

```
int *arr;
```

```
arr = (int *) malloc(MAX * sizeof(int));
```

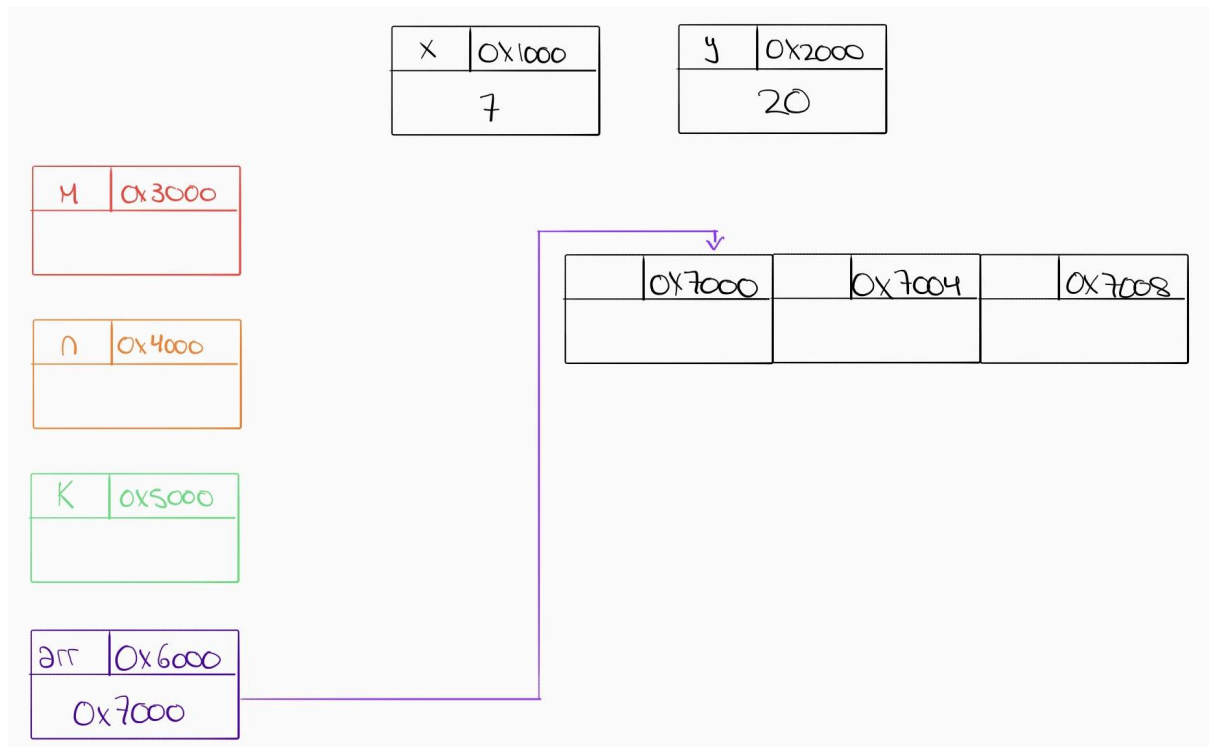


m = &x;


n = m;

k = &y;


*m = 3;

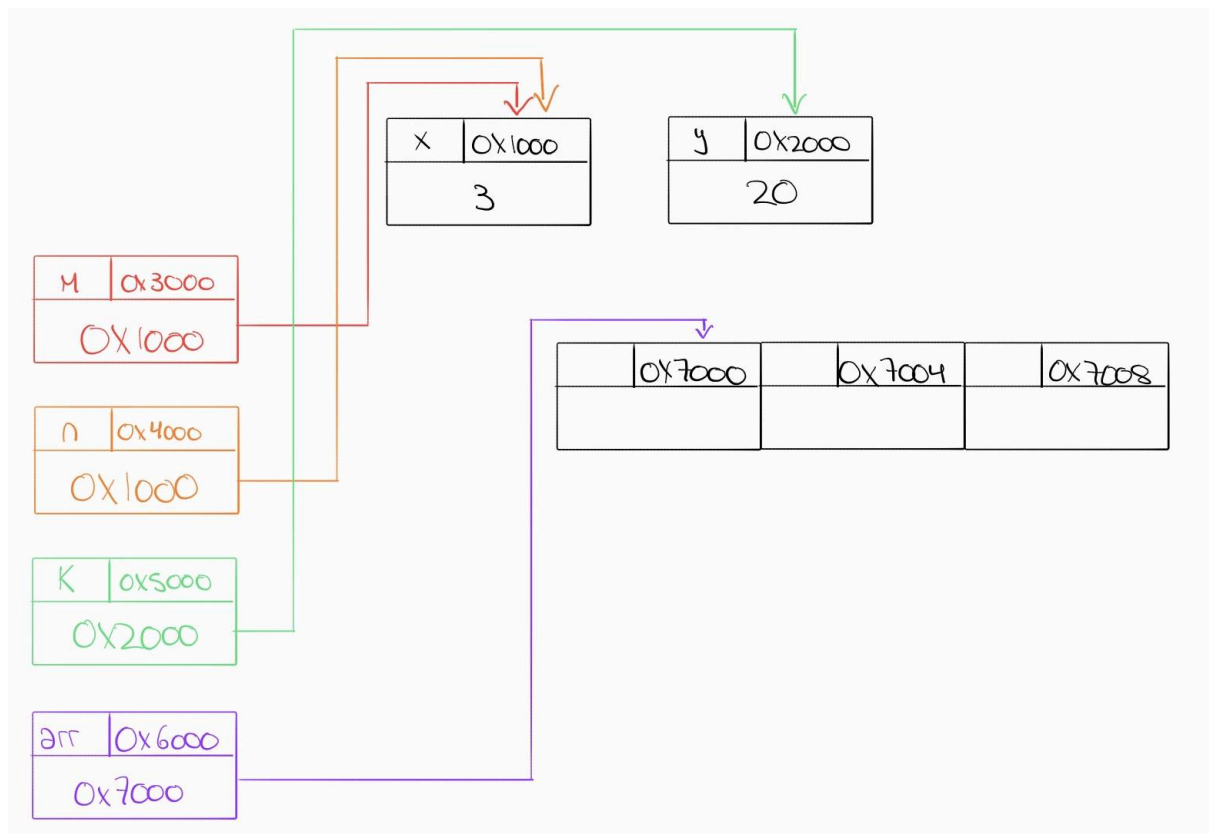

*n = *k;
*(arr) = *m;
*(arr + 1) = *k;
*(arr + 2) = x + y;

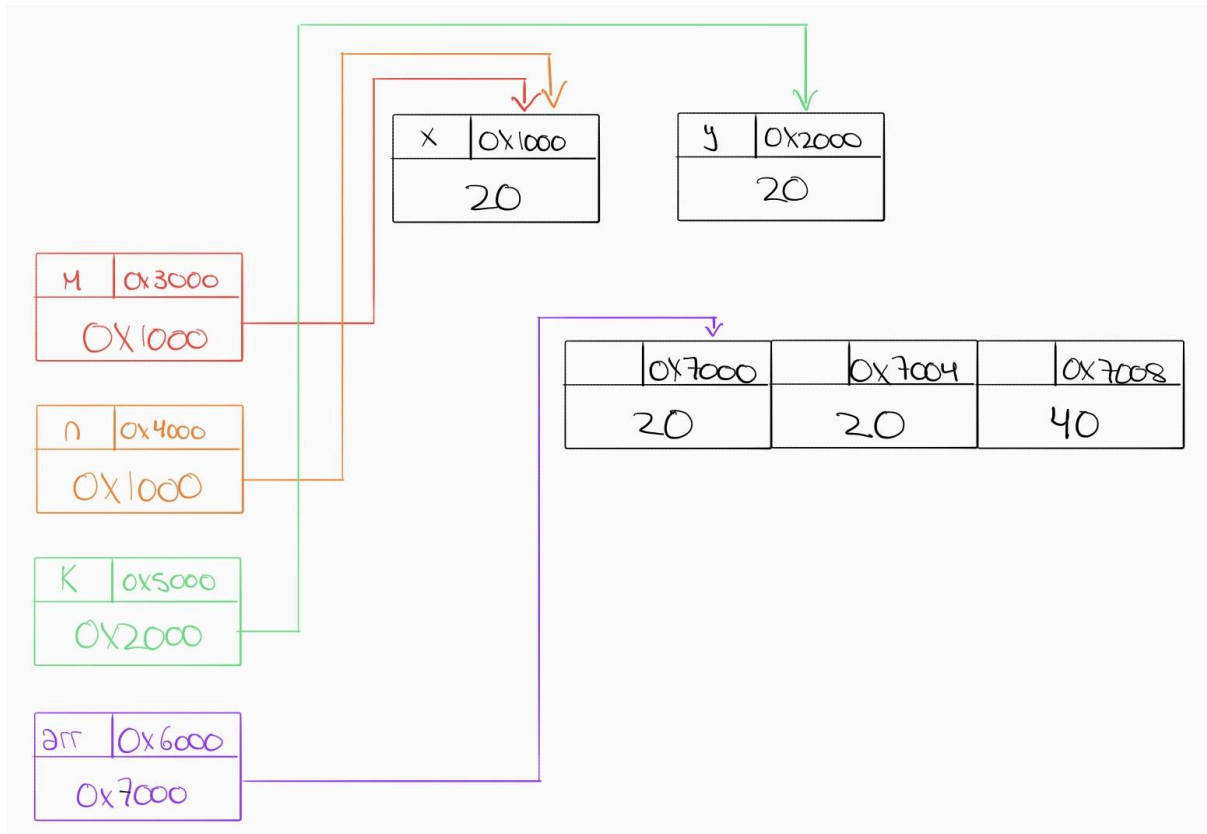

```
n = &y;  
*n += 5;
```

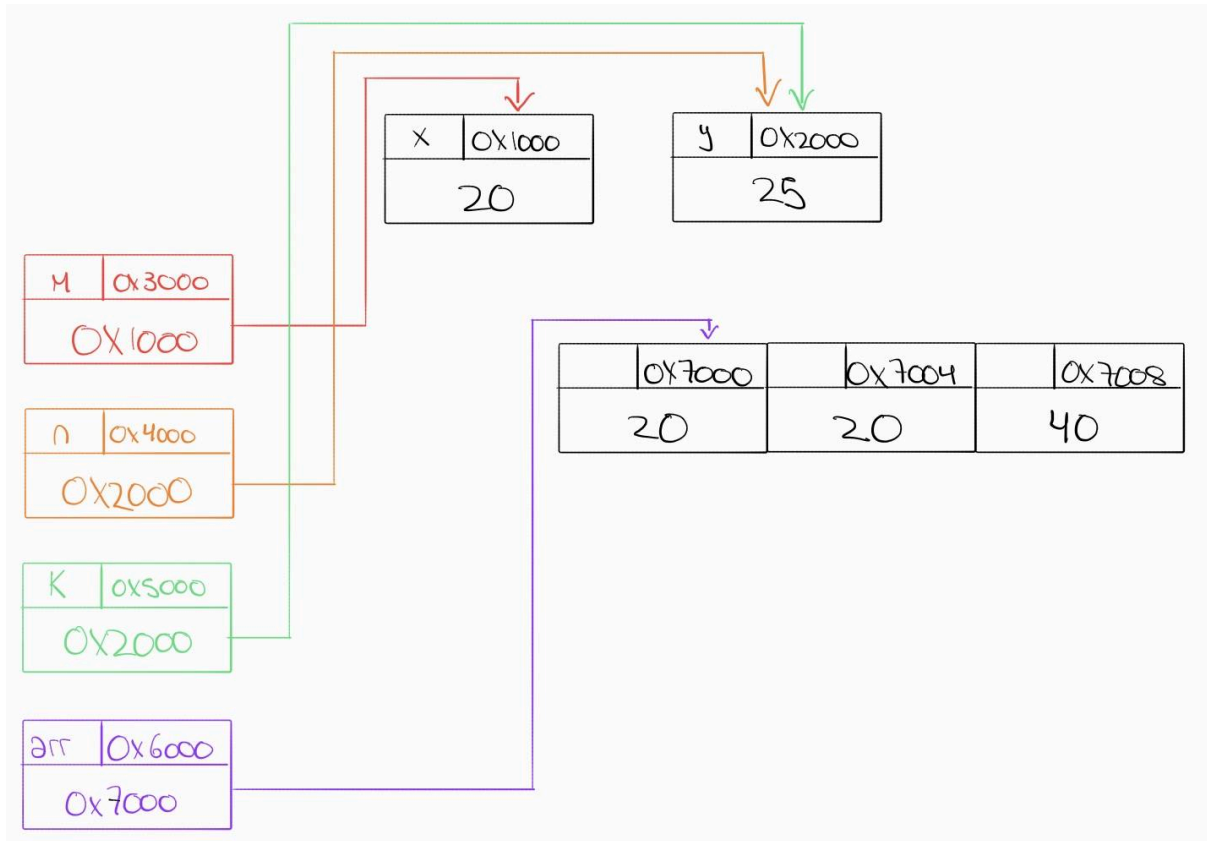

```
printf("%d, %d, %d, %d, %d, %d", x, y, *arr, *(arr+1), *(arr+2), *m);  
= 20, 25, 20, 20, 40, 20
```