

C++ Software transactional Memory

Zoltan Fuzesi

C00197361 IT Carlow

Sample BANK client with STM library

Supervisor : Joseph Kehoe

Contents

1	C++ Software Transactional Memory	2
1.1	Object Based Software Transactional Memory.	2
1.1.1	Installation of the Shared library on Linux platform.	2
1.1.2	Step 1: Download the archive file.	2
1.1.3	Step 2: Unzip in to the target destination.	2
1.1.4	Step 3: Copy the shared library.	2
1.1.5	Step 4: Achieve the required class hierarchy.	2
1.1.6	Step 5: Create an executable file.	3
1.1.7	Step 6: Transactional Environment.	3
1.1.8	Step 7: Run the application.	3
2	Hierarchical Index	4
2.1	Class Hierarchy	4
3	Class Index	4
3.1	Class List	4
4	File Index	4
4.1	File List	4
5	Class Documentation	5
5.1	AIB Class Reference	5
5.1.1	Detailed Description	8
5.1.2	Constructor & Destructor Documentation	9
5.1.3	Member Function Documentation	11
5.1.4	Member Data Documentation	22
5.2	BANK Class Reference	23
5.2.1	Detailed Description	25
5.2.2	Constructor & Destructor Documentation	25
5.2.3	Member Function Documentation	27
5.3	BOI Class Reference	29

5.3.1	Detailed Description	32
5.3.2	Constructor & Destructor Documentation	33
5.3.3	Member Function Documentation	35
5.3.4	Member Data Documentation	46
5.4	OSTM Class Reference	47
5.4.1	Detailed Description	49
5.4.2	Constructor & Destructor Documentation	50
5.4.3	Member Function Documentation	51
5.4.4	Member Data Documentation	60
5.5	TM Class Reference	62
5.5.1	Detailed Description	63
5.5.2	Constructor & Destructor Documentation	63
5.5.3	Member Function Documentation	64
5.5.4	Member Data Documentation	68
5.6	TX Class Reference	69
5.6.1	Detailed Description	71
5.6.2	Constructor & Destructor Documentation	71
5.6.3	Member Function Documentation	72
5.6.4	Friends And Related Function Documentation	81
5.6.5	Member Data Documentation	81

6	File Documentation	82
6.1	AIB.cpp File Reference	82
6.2	AIB.cpp	83
6.3	AIB.h File Reference	84
6.4	AIB.h	85
6.5	BANK.cpp File Reference	86
6.6	BANK.cpp	86
6.7	BANK.h File Reference	87
6.8	BANK.h	87
6.9	BOI.cpp File Reference	88
6.10	BOI.cpp	89
6.11	BOI.h File Reference	90
6.12	BOI.h	91
6.13	main.cpp File Reference	93
6.13.1	Function Documentation	93
6.14	main.cpp	97
6.15	OSTM.cpp File Reference	100
6.16	OSTM.cpp	100
6.17	OSTM.h File Reference	101
6.18	OSTM.h	102
6.19	TM.cpp File Reference	104
6.20	TM.cpp	104
6.21	TM.h File Reference	106
6.22	TM.h	107
6.23	TX.cpp File Reference	107
6.24	TX.cpp	108
6.25	TX.h File Reference	112
6.26	TX.h	113

1 C++ Software Transactional Memory

File: [TM.h](#) Author: Zoltan Fuzesi C00197361, IT Carlow, Software Engineering,

Supervisor : Joe Kehoe,

C++ Software Transactional Memory,

Created on December 18, 2017, 2:09 PM Transaction Manager class fields and methods declarations

1.1 Object Based Software Transactional Memory.

[OSTM](#) is a polymorphic solution to store and manage shared memory spaces within c++ programming context. You can store and managed any kind of object in transactional environment as a shared and protected memory space, if your class inherited from the [OSTM](#) base class, and follows the required steps.

1.1.1 Installation of the Shared library on Linux platform.

Download the zip file from the provided (Windows, Linux, MAC OSX)link in the web-site, that contains the libostm.↔ so, [TM.h](#), [TX.h](#), [OSTM.h](#) files.Unzip the archive file to the desired destination possibly where you program is stored. Copy the library (Shared, Static) to the destination directory. Implement the inheritance from the base class. Create an executable, and run the application.

1.1.2 Step 1: Download the archive file.

Go to the website [Tutorial](#) and download the library to the required operating system platform. (Linux, Windows, Mac OSX)

1.1.3 Step 2: Unzip in to the target destination.

Unzip the downloaded rar file. You can find the Shared, Static library and the *.h files in the unzipped folder. Copy the *.h files to the same folder where is the other C++ files are stored.

1.1.4 Step 3: Copy the shared library.

The Shared library is a libostm.so file, that you need copy to the operating system directory where the other shared library are stored. It will be different destination folder on different platforms. (Linux, Windows, Mac OS) [More Information](#)

1.1.5 Step 4: Achieve the required class hierarchy.

To achieve the required class hierachy between the [OSTM](#) library and your own class structure, you need to implement few steps to inherite from the [OSTM](#) base class. Go to website [Tutorial](#) for more details. Details and instruction of class hierarchy requirements can be found on the web-site. www.serversite.info/ostm

1.1.6 Step 5: Create an executable file.

You can create an executable file using the provided Makefile as you linking together the library (libostm.so), and the *.h files with your own files.

1.1.7 Step 6: Transactional Environment.

Now your application use transactional environment, that guarantees the consistency between object transactions.

1.1.8 Step 7: Run the application.

Go to the directory where the executable was created, and used the following line in the terminal to run the application : `./EXECUTABLE_NAME`

2 Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

OSTM	47
BANK	23
AIB	5
BOI	29
TM	62
TX	69

3 Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

AIB	5
BANK	23
BOI	29
OSTM	47
TM	62
TX	69

4 File Index

4.1 File List

Here is a list of all files with brief descriptions:

AIB.cpp	82
AIB.h	84
BANK.cpp	86
BANK.h	87
BOI.cpp	88
BOI.h	90


main.cpp	93
OSTM.cpp	100
OSTM.h	101
TM.cpp	104
TM.h	106
TX.cpp	107
TX.h	112

5 Class Documentation


5.1 AIB Class Reference

```
#include <AIB.h>
```


Inheritance diagram for AIB:



Collaboration diagram for AIB:

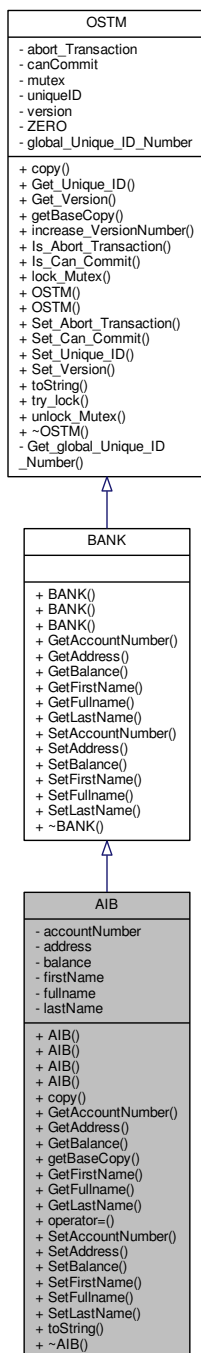

Public Member Functions

- `AIB ()`
- `AIB (int accountNumber, double balance, std::string firstName, std::string lastName, std::string address)`
- `AIB (std::shared_ptr< BANK > obj, int _version, int _unique_id)`
- `AIB (const AIB &orig)`
- virtual void `copy (std::shared_ptr< OSTM > to, std::shared_ptr< OSTM > from)`

- copy function, make deep copy of the object/pointer*
- virtual int [GetAccountNumber](#) () const
 - GetAccountNumber getter for accountNumber private field.*
- virtual std::string [GetAddress](#) () const
 - GetAddress getter for address private field.*
- virtual double [GetBalance](#) () const
 - GetBalance getter for balance private field.*
- virtual std::shared_ptr< [OSTM](#) > [getBaseCopy](#) (std::shared_ptr< [OSTM](#) > object)
 - getBaseCopy function, make deep copy of the object/pointer and Return a new std::shared_ptr<BANK> type object*
- virtual std::string [GetFirstName](#) () const
 - GetFirstName getter for firstName private field.*
- virtual std::string [GetFullname](#) () const
 - GetFullname getter for fullname private field.*
- virtual std::string [GetLastName](#) () const
 - GetLastName getter for lastName private field.*
- [AIB operator=](#) (const [AIB](#) &orig)
- virtual void [SetAccountNumber](#) (int [accountNumber](#))
 - SetAccountNumber setter for accountNumber private field.*
- virtual void [SetAddress](#) (std::string [address](#))
 - SetAddress setter for address private field.*
- virtual void [SetBalance](#) (double [balance](#))
 - SetBalance setter for balance private field.*
- virtual void [SetFirstName](#) (std::string [firstName](#))
 - SetFirstName setter for firstName private field.*
- virtual void [SetFullname](#) (std::string [fullname](#))
 - SetFullname setter for fullname private field.*
- virtual void [SetLastName](#) (std::string [lastName](#))
 - SetLastName setter for lastName private field.*
- virtual void [toString](#) ()
 - toString function, displays the object values in formatted way*
- virtual [~AIB](#) ()

Private Attributes

- int [accountNumber](#)
- std::string [address](#)
- double [balance](#)
- std::string [firstName](#)
- std::string [fullname](#)
- std::string [lastName](#)

5.1.1 Detailed Description

Class [AIB](#) Inherit from [BANK](#) class

Definition at line 23 of file [AIB.h](#).

5.1.2 Constructor & Destructor Documentation

5.1.2.1 AIB::AIB () [inline]

Constructor

Definition at line 28 of file [AIB.h](#).

References [accountNumber](#), [address](#), [balance](#), [firstName](#), [fullName](#), and [lastName](#).


Referenced by [AIB\(\)](#), and [getBaseCopy\(\)](#).

```

00028         : BANK()
00029     {
00030         this->accountNumber = 0;
00031         this->balance = 50;
00032         this->firstName = "Joe";
00033         this->lastName = "Blog";
00034         this->address = "High street, Carlow";
00035         this->fullName = firstName + " " + lastName;
00036     }
00037 };

```

Here is the caller graph for this function:



5.1.2.2 AIB::AIB (int *accountNumber*, double *balance*, std::string *firstName*, std::string *lastName*, std::string *address*) [inline]

Custom constructor

Parameters

<i>accountNumber</i>	integer
<i>balance</i>	double
<i>firstName</i>	string
<i>lastName</i>	string
<i>address</i>	string

Definition at line 46 of file [AIB.h](#).

References [accountNumber](#), [address](#), [balance](#), [firstName](#), [fullName](#), and [lastName](#).

```

00046                                     :
00047     BANK()
00048     {
00049         this->accountNumber = accountNumber;
00049         this->balance = balance;
00050         this->firstName = firstName;
00051         this->lastName = lastName;
00052         this->address = address;
00053         this->fullname = firstName + " " + lastName;
00054     };

```

5.1.2.3 AIB::AIB (std::shared_ptr< BANK > obj, int _version, int _unique_id) [inline]

Custom constructor, used by the library for deep copying

Parameters

<i>obj</i>	std::shared_ptr<BANK>
<i>_version</i>	integer
<i>_unique_id</i>	integer

Definition at line 61 of file [AIB.h](#).

References [accountNumber](#), [address](#), [AIB\(\)](#), [balance](#), [firstName](#), [fullname](#), and [lastName](#).

```

00061                                     : BANK(_version, _unique_id)
00062     {
00063         this->accountNumber = obj->GetAccountNumber();
00064         this->balance = obj->GetBalance();
00065         this->firstName = obj->GetFirstName();
00066         this->lastName = obj->GetLastName();
00067         this->address = obj->GetAddress();
00068         this->fullname = obj->GetFirstName() + " " + obj->GetLastName();
00069     };
00070

```

Here is the call graph for this function:



5.1.2.4 AIB::AIB (const AIB & orig)

Copy constructor

5.1.2.5 AIB::~~AIB () [virtual]

de-constructor

Definition at line 19 of file [AIB.cpp](#).

Referenced by [operator=\(\)](#).

```
00019         {
00020     }
```

Here is the caller graph for this function:



5.1.3 Member Function Documentation

5.1.3.1 void AIB::copy (std::shared_ptr< OSTM > to, std::shared_ptr< OSTM > from) [virtual]

copy function, make deep copy of the object/pointer

Implement [OSTM](#) virtual methods in cpp class

Parameters

<i>to</i>	std::shared_ptr<OSTM>, BANK type shared pointer used to copy into the values
<i>from</i>	std::shared_ptr<OSTM>, BANK type shared pointer used to get object values tfrom copy

Dynamic cast from [OSTM](#) to [AIB](#)

Dynamic cast from [OSTM](#) to [AIB](#)

Set values fro object to object

Set values fro object to object

Set values fro object to object

Set values fro object to object

Reimplemented from [OSTM](#).

Definition at line 41 of file [AIB.cpp](#).

References [OSTM::Set_Unique_ID\(\)](#).

Referenced by [operator=\(\)](#).

```

00041                                     {
00042
00044     std::shared_ptr<AIB> objTO = std::dynamic_pointer_cast<AIB>(to);
00046     std::shared_ptr<AIB> objFROM = std::dynamic_pointer_cast<AIB>(from);
00048     objTO->Set_Unique_ID(objFROM->Get_Unique_ID());
00050     objTO->Set_Version(objFROM->Get_Version());
00052     objTO->SetAccountNumber(objFROM->GetAccountNumber());
00054     objTO->SetBalance(objFROM->GetBalance());
00055 }

```

Here is the call graph for this function:



Here is the caller graph for this function:



5.1.3.2 int AIB::GetAccountNumber () const [virtual]

GetAccountNumber getter for accountNumber private field.

Reimplemented from [BANK](#).

Definition at line 96 of file [AIB.cpp](#).

References [accountNumber](#).


Referenced by [operator=\(\)](#), and [toString\(\)](#).

```

00096                                     {
00097     return accountNumber;
00098 }

```

Here is the caller graph for this function:



5.1.3.3 `std::string AIB::GetAddress () const [virtual]`

GetAddress getter for address private field.

Reimplemented from [BANK](#).

Definition at line 72 of file [AIB.cpp](#).

References [address](#).

Referenced by [operator=\(\)](#).

```
00072                                     {
00073     return address;
00074 }
```

Here is the caller graph for this function:



5.1.3.4 `double AIB::GetBalance () const [virtual]`

GetBalance getter for balance private field.

Reimplemented from [BANK](#).


Definition at line 84 of file [AIB.cpp](#).

References [balance](#).

Referenced by [operator=\(\)](#), and [toString\(\)](#).

```
00084                                     {
00085     return balance;
00086 }
```

Here is the caller graph for this function:



5.1.3.5 `std::shared_ptr< OSTM > AIB::getBaseCopy (std::shared_ptr< OSTM > object) [virtual]`

getBaseCopy function, make deep copy of the object/pointer and Return a new `std::shared_ptr<BANK>` type object

Parameters

<i>object</i>	is a OSTM type shared pointer use to create a new copy of the pointer
---------------	---

Dynamic cast from [OSTM](#) to [BANK](#) type

[BANK](#) type Instance creation shared pointer

Dynamic cast from [BANK](#) to [OSTM](#) type

Return new [OSTM](#) copy onject

Reimplemented from [OSTM](#).

Definition at line 25 of file [AIB.cpp](#).

References [AIB\(\)](#).

Referenced by [operator=\(\)](#).

```

00026 {
00028     std::shared_ptr<BANK> objTO = std::dynamic_pointer_cast<BANK>(object);
00030     std::shared_ptr<BANK> obj(new AIB(objTO, object->Get_Version(),object->Get_Unique_ID()));
00032     std::shared_ptr<OSTM> ostm_obj = std::dynamic_pointer_cast<OSTM>(obj);
00034     return ostm_obj;
00035 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



5.1.3.6 `std::string AIB::GetFirstName () const` [virtual]

GetFirstName getter for firstName private field.

Reimplemented from [BANK](#).


Definition at line 120 of file [AIB.cpp](#).

References [firstName](#).

Referenced by [operator=\(\)](#), and [toString\(\)](#).

```
00120                                     {  
00121     return firstName;  
00122 }
```

Here is the caller graph for this function:



5.1.3.7 `std::string AIB::GetFullname () const` [virtual]

GetFullname getter for fullname private field.

Reimplemented from [BANK](#).

Definition at line 132 of file [AIB.cpp](#).

References [fullname](#).

Referenced by [operator=\(\)](#).

```
00132                                     {  
00133     return fullname;  
00134 }
```

Here is the caller graph for this function:



5.1.3.8 `std::string AIB::GetLastName () const` `[virtual]`

GetLastName getter for lastName private field.

Reimplemented from [BANK](#).


Definition at line 108 of file [AIB.cpp](#).

References [lastName](#).

Referenced by [operator=\(\)](#), and [toString\(\)](#).

```
00108         {
00109     return lastName;
00110 }
```

Here is the caller graph for this function:



5.1.3.9 `AIB AIB::operator= (const AIB & orig)` `[inline]`


Operator function

Definition at line 78 of file [AIB.h](#).

References [accountNumber](#), [address](#), [balance](#), [copy\(\)](#), [firstName](#), [fullname](#), [GetAccountNumber\(\)](#), [GetAddress\(\)](#), [GetBalance\(\)](#), [getBaseCopy\(\)](#), [GetFirstName\(\)](#), [GetFullname\(\)](#), [GetLastName\(\)](#), [lastName](#), [SetAccountNumber\(\)](#), [SetAddress\(\)](#), [SetBalance\(\)](#), [SetFirstName\(\)](#), [SetFullname\(\)](#), [SetLastName\(\)](#), [toString\(\)](#), and [~AIB\(\)](#).

```
00078 {};
```

Here is the call graph for this function:

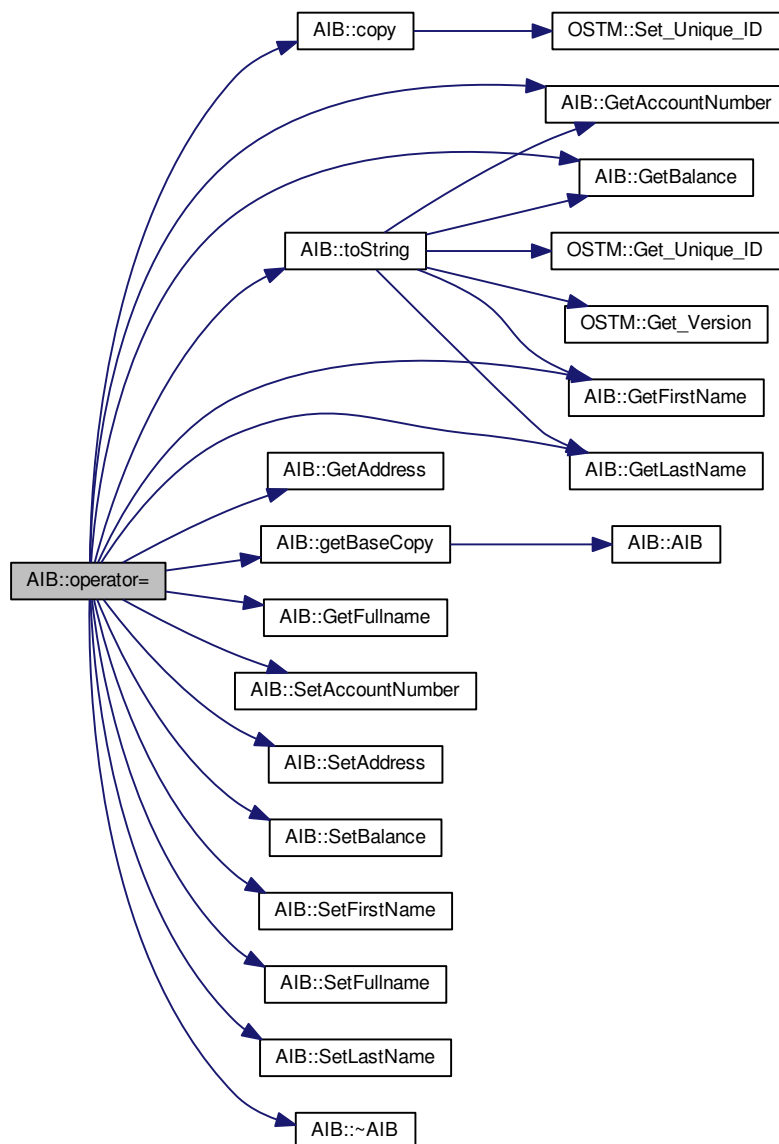

5.1.3.10 void AIB::SetAccountNumber (int *accountNumber*) [virtual]

SetAccountNumber setter for accountNumber private field.

Reimplemented from [BANK](#).


Definition at line 90 of file [AIB.cpp](#).

References [accountNumber](#).

Referenced by [operator=\(\)](#).

```
00090      {  
00091      this->accountNumber = accountNumber;  
00092  }
```

Here is the caller graph for this function:



5.1.3.11 void AIB::SetAddress (std::string address) [virtual]

SetAddress setter for address private field.

Reimplemented from [BANK](#).

Definition at line 66 of file [AIB.cpp](#).

References [address](#).

Referenced by [operator=\(\)](#).

```
00066      {  
00067      this->address = address;  
00068  }
```

Here is the caller graph for this function:



5.1.3.12 `void AIB::SetBalance (double balance)` [virtual]

SetBalance setter for balance private field.

Reimplemented from [BANK](#).

Definition at line 78 of file [AIB.cpp](#).

References [balance](#).

Referenced by [operator=\(\)](#).

```
00078      {  
00079      this->balance = balance;  
00080  }
```

Here is the caller graph for this function:

**5.1.3.13** `void AIB::SetFirstName (std::string firstName)` [virtual]

SetFirstName setter for firstName private field.

Reimplemented from [BANK](#).

Definition at line 114 of file [AIB.cpp](#).

References [firstName](#).

Referenced by [operator=\(\)](#).

```
00114      {  
00115      this->firstName = firstName;  
00116  }
```

Here is the caller graph for this function:



5.1.3.14 void AIB::SetFullname (std::string fullname) [virtual]

SetFullname setter for fullname private field.

Reimplemented from [BANK](#).

Definition at line 126 of file [AIB.cpp](#).

References [fullname](#).

Referenced by [operator=\(\)](#).

```
00126                                     {  
00127     this->fullname = fullname;  
00128 }
```

Here is the caller graph for this function:



5.1.3.15 void AIB::SetLastName (std::string lastName) [virtual]

SetLastName setter for lastName private field.

Reimplemented from [BANK](#).

Definition at line 102 of file [AIB.cpp](#).

References [lastName](#).

Referenced by [operator=\(\)](#).

```
00102                                     {  
00103     this->lastName = lastName;  
00104 }
```

Here is the caller graph for this function:



5.1.3.16 void AIB::toString() [virtual]

toString function, displays the object values in formatted way

Reimplemented from [OSTM](#).


Definition at line 59 of file [AIB.cpp](#).

References [OSTM::Get_Unique_ID\(\)](#), [OSTM::Get_Version\(\)](#), [GetAccountNumber\(\)](#), [GetBalance\(\)](#), [GetFirstName\(\)](#), and [GetLastName\(\)](#).

Referenced by [operator=\(\)](#).

```
00060 {
00061     std::cout << "\nAIB BANK" << "\nUnique ID : " << this->Get_Unique_ID() << "\nInt account : "
    << this->GetAccountNumber() << "\nDouble value : " << this->GetBalance() << "\nFirst name: " << this->GetFirstName() << "\nLast name : " <<
    this->GetLastName() << "\nVersion number : " << this->Get_Version() << std::endl;
00062 }
```

Here is the call graph for this function:

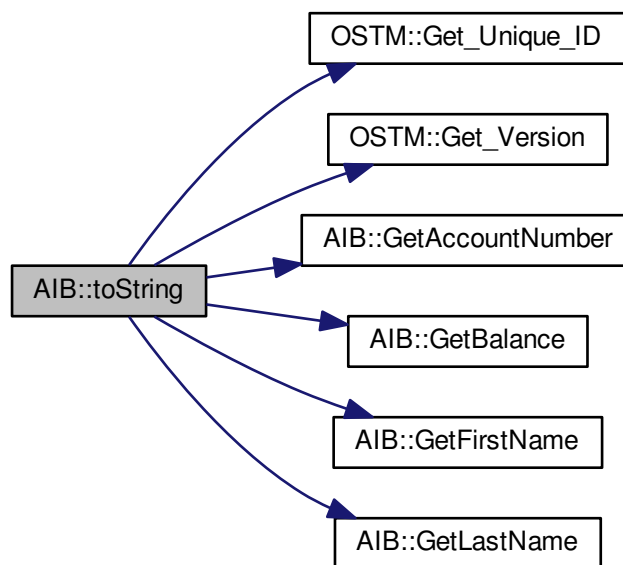

Here is the caller graph for this function:



5.1.4 Member Data Documentation

5.1.4.1 `int AIB::accountNumber` `[private]`

`accountNumber` `int` object private filed

Definition at line [123](#) of file [AIB.h](#).

Referenced by [AIB\(\)](#), [GetAccountNumber\(\)](#), [operator=\(\)](#), and [SetAccountNumber\(\)](#).

5.1.4.2 `std::string AIB::address` `[private]`

`address` `string` object private filed

Definition at line [131](#) of file [AIB.h](#).

Referenced by [AIB\(\)](#), [GetAddress\(\)](#), [operator=\(\)](#), and [SetAddress\(\)](#).

5.1.4.3 `double AIB::balance` `[private]`

`balance` `double` object private filed

Definition at line [127](#) of file [AIB.h](#).

Referenced by [AIB\(\)](#), [GetBalance\(\)](#), [operator=\(\)](#), and [SetBalance\(\)](#).

5.1.4.4 `std::string AIB::firstName` `[private]`

`firstName` `string` object private filed

Definition at line [115](#) of file [AIB.h](#).

Referenced by [AIB\(\)](#), [GetFirstName\(\)](#), [operator=\(\)](#), and [SetFirstName\(\)](#).

5.1.4.5 `std::string AIB::fullname` `[private]`

`fullname` `string` object private filed

Definition at line [111](#) of file [AIB.h](#).

Referenced by [AIB\(\)](#), [GetFullname\(\)](#), [operator=\(\)](#), and [SetFullname\(\)](#).

5.1.4.6 `std::string AIB::lastName` `[private]`

`lastName` `string` object private filed

Definition at line [119](#) of file [AIB.h](#).

Referenced by [AIB\(\)](#), [GetLastName\(\)](#), [operator=\(\)](#), and [SetLastName\(\)](#).


The documentation for this class was generated from the following files:

- [AIB.h](#)
- [AIB.cpp](#)


5.2 BANK Class Reference

```
#include <BANK.h>
```

Inheritance diagram for BANK:

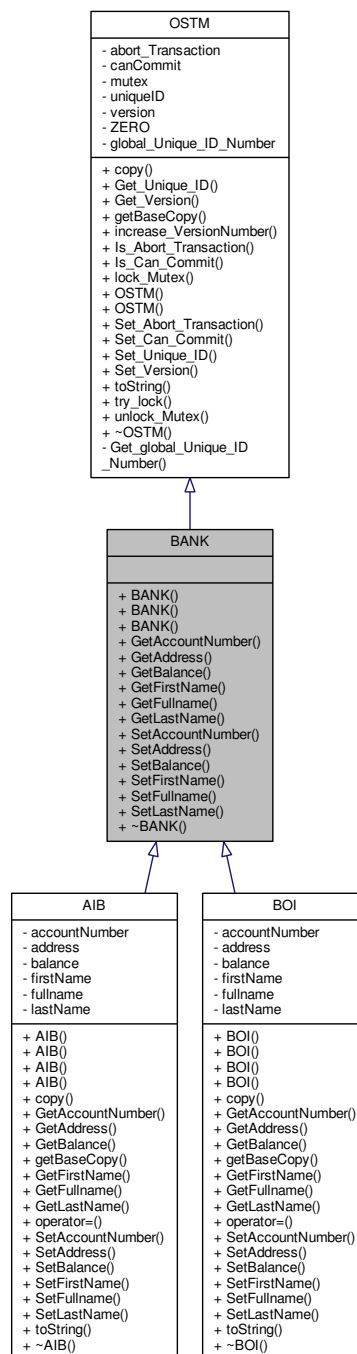

Collaboration diagram for BANK:

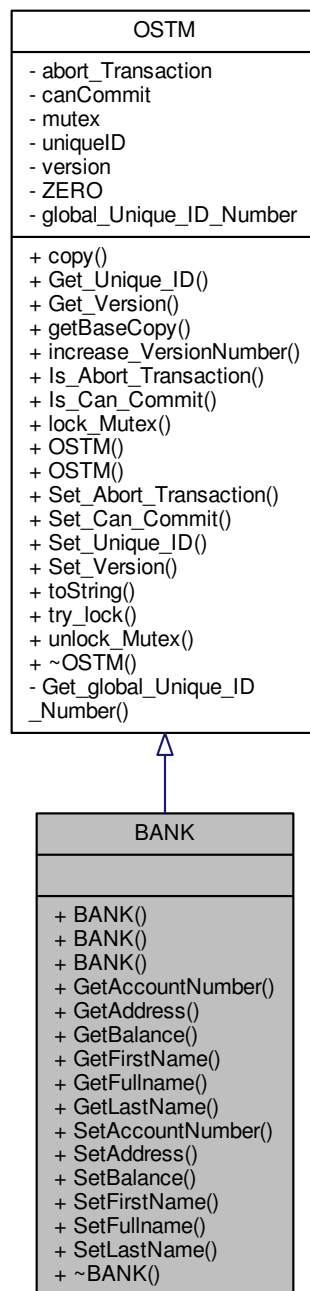

Public Member Functions

- **BANK** ()
- **BANK** (int _version, int _unique_id)
- **BANK** (const **BANK** &orig)
- virtual int **GetAccountNumber** () const
- virtual std::string **GetAddress** () const

- virtual double [GetBalance](#) () const
- virtual std::string [GetFirstName](#) () const
- virtual std::string [GetFullname](#) () const
- virtual std::string [GetLastName](#) () const
- virtual void [SetAccountNumber](#) (int accountNumber)
- virtual void [SetAddress](#) (std::string address)
- virtual void [SetBalance](#) (double balance)
- virtual void [SetFirstName](#) (std::string firstName)
- virtual void [SetFullname](#) (std::string fullname)
- virtual void [SetLastName](#) (std::string lastName)
- virtual [~BANK](#) ()

5.2.1 Detailed Description

[BANK](#) inherit from the [OSTM](#) library. It is declares the common functions in the child classes as a virtual function.

Definition at line 21 of file [BANK.h](#).

5.2.2 Constructor & Destructor Documentation

5.2.2.1 [BANK::BANK](#) () `[inline]`

Constructor

Definition at line 28 of file [BANK.h](#).

Referenced by [BANK\(\)](#).

```
00028         : OSTM() {
00029
00030     };
```

Here is the caller graph for this function:



5.2.2.2 `BANK::BANK (int_version, int_unique_id) [inline]`


Custom Constructor

Definition at line 34 of file [BANK.h](#).

References [BANK\(\)](#), and [~BANK\(\)](#).

```
00034 : OSTM(_version, _unique_id){};
```

Here is the call graph for this function:

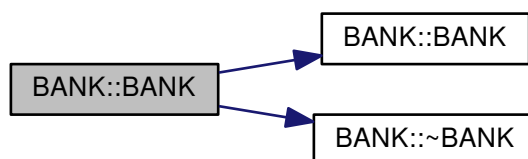

5.2.2.3 `BANK::BANK (const BANK & orig)`

Copy constructor

Definition at line 16 of file [BANK.cpp](#).

```
00016 {  
00017 }
```

5.2.2.4 `BANK::~~BANK () [virtual]`

De-constructor

Definition at line 19 of file [BANK.cpp](#).

Referenced by [BANK\(\)](#).

```
00019 {  
00020 }
```

Here is the caller graph for this function:



5.2.3 Member Function Documentation

5.2.3.1 `virtual int BANK::GetAccountNumber () const [inline],[virtual]`

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 52 of file [BANK.h](#).

```
00052 {};
```

5.2.3.2 `virtual std::string BANK::GetAddress () const [inline],[virtual]`

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 48 of file [BANK.h](#).

```
00048 {};
```

5.2.3.3 `virtual double BANK::GetBalance () const [inline],[virtual]`

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 50 of file [BANK.h](#).

```
00050 {};
```

5.2.3.4 `virtual std::string BANK::GetFirstName () const [inline],[virtual]`

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 56 of file [BANK.h](#).

```
00056 {};
```

5.2.3.5 `virtual std::string BANK::GetFullName () const [inline],[virtual]`

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 58 of file [BANK.h](#).

```
00058 {};
```

5.2.3.6 `virtual std::string BANK::GetLastName () const [inline],[virtual]`

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 54 of file [BANK.h](#).

```
00054 {};
```

5.2.3.7 `virtual void BANK::SetAccountNumber (int accountNumber) [inline],[virtual]`

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 51 of file [BANK.h](#).

```
00051 {};
```

5.2.3.8 `virtual void BANK::SetAddress (std::string address) [inline],[virtual]`

Bank specific virtual functions

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 47 of file [BANK.h](#).

```
00047 {};
```

5.2.3.9 `virtual void BANK::SetBalance (double balance) [inline],[virtual]`


Reimplemented in [AIB](#), and [BOI](#).

Definition at line 49 of file [BANK.h](#).

Referenced by [_nesting_\(\)](#), and [_two_account_transfer_\(\)](#).

```
00049 {};
```

Here is the caller graph for this function:



5.2.3.10 `virtual void BANK::SetFirstName (std::string firstName) [inline],[virtual]`

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 55 of file [BANK.h](#).

```
00055 {};
```

5.2.3.11 `virtual void BANK::SetFullName (std::string fullName) [inline],[virtual]`

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 57 of file [BANK.h](#).

```
00057 {};
```

5.2.3.12 `virtual void BANK::SetLastName (std::string lastName) [inline],[virtual]`

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 53 of file [BANK.h](#).

```
00053 {};
```


The documentation for this class was generated from the following files:

- [BANK.h](#)
- [BANK.cpp](#)


5.3 BOI Class Reference

```
#include <BOI.h>
```


Inheritance diagram for BOI:

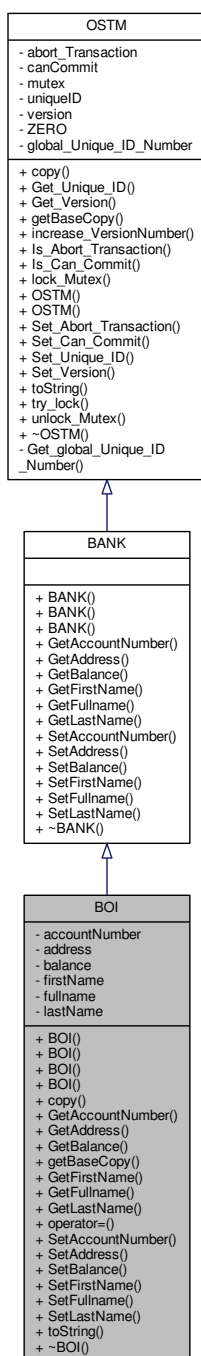

Collaboration diagram for BOI:

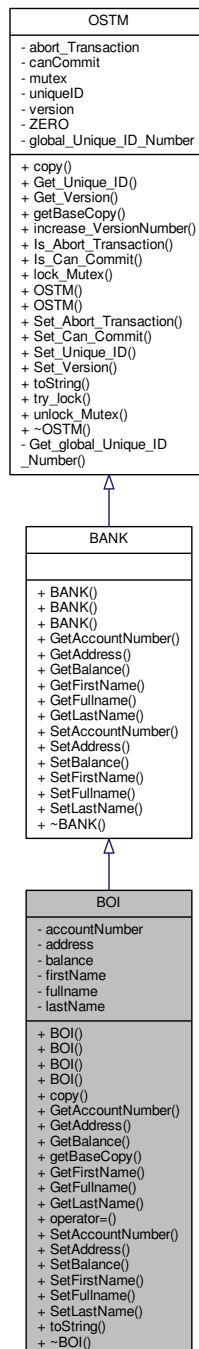

Public Member Functions

- [BOI \(\)](#)
- [BOI \(int \[accountNumber\]\(#\), double \[balance\]\(#\), std::string \[firstName\]\(#\), std::string \[lastName\]\(#\), std::string \[address\]\(#\)\)](#)
- [BOI \(std::shared_ptr< \[BOI\]\(#\) > obj, int \[_version\]\(#\), int \[_unique_id\]\(#\)\)](#)
- [BOI \(const \[BOI\]\(#\) &orig\)](#)
- virtual void [copy](#) (std::shared_ptr< [OSTM](#) > to, std::shared_ptr< [OSTM](#) > from)

- copy function, make deep copy of the object/pointer*
- virtual int [GetAccountNumber](#) () const
 - GetAccountNumber getter for accountNumber private field.*
- virtual std::string [GetAddress](#) () const
 - GetAddress getter for address private field.*
- virtual double [GetBalance](#) () const
 - GetBalance getter for balance private field.*
- virtual std::shared_ptr< [OSTM](#) > [getBaseCopy](#) (std::shared_ptr< [OSTM](#) > object)
 - getBaseCopy function, make deep copy of the object/pointer and Return a new std::shared_ptr<BANK> type object*
- virtual std::string [GetFirstName](#) () const
 - GetFirstName getter for firstName private field.*
- virtual std::string [GetFullname](#) () const
 - GetFullname getter for fullname private field.*
- virtual std::string [GetLastName](#) () const
 - GetLastName getter for lastName private field.*
- [BOI operator=](#) (const [BOI](#) &orig)
- virtual void [SetAccountNumber](#) (int [accountNumber](#))
 - SetAccountNumber setter for accountNumber private field.*
- virtual void [SetAddress](#) (std::string [address](#))
 - SetAddress setter for address private field.*
- virtual void [SetBalance](#) (double [balance](#))
 - SetBalance setter for balance private field.*
- virtual void [SetFirstName](#) (std::string [firstName](#))
 - SetFirstName setter for firstName private field.*
- virtual void [SetFullname](#) (std::string [fullname](#))
 - SetFullname setter for fullname private field.*
- virtual void [SetLastName](#) (std::string [lastName](#))
 - SetLastName setter for lastName private field.*
- virtual void [toString](#) ()
 - toString function, displays the object values in formatted way*
- virtual [~BOI](#) ()

Private Attributes

- int [accountNumber](#)
- std::string [address](#)
- double [balance](#)
- std::string [firstName](#)
- std::string [fullname](#)
- std::string [lastName](#)

5.3.1 Detailed Description

Class [BOI](#) Inherit from [BANK](#) class

Definition at line 24 of file [BOI.h](#).

5.3.2 Constructor & Destructor Documentation

5.3.2.1 BOI::BOI() [inline]

Constructor

Definition at line 29 of file [BOI.h](#).


References [accountNumber](#), [address](#), [balance](#), [firstName](#), [fullName](#), and [lastName](#).

Referenced by [BOI\(\)](#), and [getBaseCopy\(\)](#).

```

00029         : BANK()
00030     {
00031         this->accountNumber = 0;
00032         this->balance = 50;
00033         this->firstName = "Joe";
00034         this->lastName = "Blog";
00035         this->address = "High street, Carlow";
00036         this->fullName = firstName + " " + lastName;
00037     }
00038 }
```

Here is the caller graph for this function:



5.3.2.2 BOI::BOI(int *accountNumber*, double *balance*, std::string *firstName*, std::string *lastName*, std::string *address*) [inline]

Custom constructor

Parameters

<i>accountNumber</i>	integer
<i>balance</i>	double
<i>firstName</i>	string
<i>lastName</i>	string
<i>address</i>	string

Definition at line 47 of file [BOI.h](#).

References [accountNumber](#), [address](#), [balance](#), [firstName](#), [fullName](#), and [lastName](#).

```

00047                                     :
00048     BANK()
00049     {
00049         this->accountNumber = accountNumber;
00050         this->balance = balance;
00051         this->firstName = firstName;
00052         this->lastName = lastName;
00053         this->address = address;
00054         this->fullname = firstName + " " + lastName;
00055     };

```

5.3.2.3 BOI::BOI(std::shared_ptr< BOI > obj, int _version, int _unique_id) [inline]

Custom constructor, used by the library for deep copying

Parameters

<i>obj</i>	std::shared_ptr<BANK>
<i>_version</i>	integer
<i>_unique_id</i>	integer

Definition at line 62 of file [BOI.h](#).

References [accountNumber](#), [address](#), [balance](#), [BOI\(\)](#), [firstName](#), [fullname](#), and [lastName](#).

```

00062                                     : BANK(_version, _unique_id)
00063     {
00064         this->accountNumber = obj->GetAccountNumber();
00065         this->balance = obj->GetBalance();
00066         this->firstName = obj->GetFirstName();
00067         this->lastName = obj->GetLastName();
00068         this->address = obj->GetAddress();
00069         this->fullname = obj->GetFirstName() + " " + obj->GetLastName();
00070     };

```

Here is the call graph for this function:



5.3.2.4 BOI::BOI(const BOI & orig)

Copy constructor

Definition at line 20 of file [BOI.cpp](#).

```

00020     {
00021 }

```

5.3.2.5 BOI::~~BOI() [virtual]

de-constructor

Definition at line 17 of file [BOI.cpp](#).

Referenced by [operator=\(\)](#).

```
00017         {
00018     }
```

Here is the caller graph for this function:



5.3.3 Member Function Documentation

5.3.3.1 void BOI::copy (std::shared_ptr< OSTM > to, std::shared_ptr< OSTM > from) [virtual]

copy function, make deep copy of the object/pointer

Parameters

<i>to</i>	std::shared_ptr<OSTM>, BANK type shared pointer used to copy into the values
<i>from</i>	std::shared_ptr<OSTM>, BANK type shared pointer used to get object values tfrom copy

Dynamic cast from [OSTM](#) to [BOI](#)

Dynamic cast from [OSTM](#) to [BOI](#)

Set values fro object to object

Set values fro object to object

Set values fro object to object

Set values fro object to object

Reimplemented from [OSTM](#).

Definition at line 42 of file [BOI.cpp](#).

References [OSTM::Set_Unique_ID\(\)](#).

Referenced by [operator=\(\)](#).

```

00042                                     {
00044     std::shared_ptr<BOI> objTO = std::dynamic_pointer_cast<BOI>(to);
00046     std::shared_ptr<BOI> objFROM = std::dynamic_pointer_cast<BOI>(from);
00048     objTO->Set_Unique_ID(objFROM->Get_Unique_ID());
00050     objTO->Set_Version(objFROM->Get_Version());
00052     objTO->Set_AccountNumber(objFROM->Get_AccountNumber());
00054     objTO->Set_Balance(objFROM->Get_Balance());
00055 }

```

Here is the call graph for this function:



Here is the caller graph for this function:



5.3.3.2 int BOI::GetAccountNumber () const [virtual]

GetAccountNumber getter for accountNumber private field.

Reimplemented from [BANK](#).

Definition at line 96 of file [BOI.cpp](#).

References [accountNumber](#).


Referenced by [operator=\(\)](#), and [toString\(\)](#).

```

00096                                     {
00097     return accountNumber;
00098 }

```

Here is the caller graph for this function:



5.3.3.3 `std::string BOI::GetAddress () const [virtual]`

GetAddress getter for address private field.

Reimplemented from [BANK](#).

Definition at line 72 of file [BOI.cpp](#).

References [address](#).

Referenced by [operator=\(\)](#).

```
00072                                     {
00073     return address;
00074 }
```

Here is the caller graph for this function:



5.3.3.4 `double BOI::GetBalance () const [virtual]`

GetBalance getter for balance private field.

Reimplemented from [BANK](#).


Definition at line 84 of file [BOI.cpp](#).

References [balance](#).

Referenced by [operator=\(\)](#), and [toString\(\)](#).

```
00084                                     {
00085     return balance;
00086 }
```

Here is the caller graph for this function:



5.3.3.5 `std::shared_ptr< OSTM > BOI::getBaseCopy (std::shared_ptr< OSTM > object) [virtual]`

getBaseCopy function, make deep copy of the object/pointer and Return a new `std::shared_ptr<BANK>` type object

Parameters

<i>object</i>	is a OSTM type shared pointer use to create a new copy of the pointer
---------------	---

Dynamic cast from [OSTM](#) to [BANK](#) type

[BANK](#) type Instance creation shared pointer

Dynamic cast from [BANK](#) to [OSTM](#) type

Return new [OSTM](#) copy onject

Reimplemented from [OSTM](#).

Definition at line 26 of file [BOI.cpp](#).

References [BOI\(\)](#).


Referenced by [operator=\(\)](#).

```

00027 {
00029     std::shared_ptr<BOI> objT0 = std::dynamic_pointer_cast<BOI>(object);
00031     std::shared_ptr<BOI> obj(new BOI(objT0,object->Get_Version(),object->Get_Unique_ID()));
00033     std::shared_ptr<OSTM> ostm_obj = std::dynamic_pointer_cast<OSTM>(obj);
00035     return ostm_obj;
00036 }

```

Here is the call graph for this function:



Here is the caller graph for this function:



5.3.3.6 `std::string BOI::GetFirstName () const` [virtual]

GetFirstName getter for firstName private field.

Reimplemented from [BANK](#).


Definition at line 120 of file [BOI.cpp](#).

References [firstName](#).

Referenced by [operator=\(\)](#), and [toString\(\)](#).

```
00120                                     {  
00121     return firstName;  
00122 }
```

Here is the caller graph for this function:



5.3.3.7 `std::string BOI::GetFullname () const` [virtual]

GetFullname getter for fullname private field.

Reimplemented from [BANK](#).

Definition at line 132 of file [BOI.cpp](#).

References [fullname](#).

Referenced by [operator=\(\)](#).

```
00132                                     {  
00133     return fullname;  
00134 }
```

Here is the caller graph for this function:



5.3.3.8 `std::string BOI::GetLastName () const [virtual]`

GetLastName getter for lastName private field.

Reimplemented from [BANK](#).


Definition at line 108 of file [BOI.cpp](#).

References [lastName](#).

Referenced by [operator=\(\)](#), and [toString\(\)](#).

```
00108         {
00109     return lastName;
00110 }
```

Here is the caller graph for this function:



5.3.3.9 `BOI BOI::operator= (const BOI & orig) [inline]`


Operator

Definition at line 78 of file [BOI.h](#).

References [accountNumber](#), [address](#), [balance](#), [copy\(\)](#), [firstName](#), [fullname](#), [GetAccountNumber\(\)](#), [GetAddress\(\)](#), [GetBalance\(\)](#), [getBaseCopy\(\)](#), [GetFirstName\(\)](#), [GetFullname\(\)](#), [GetLastName\(\)](#), [lastName](#), [SetAccountNumber\(\)](#), [SetAddress\(\)](#), [SetBalance\(\)](#), [SetFirstName\(\)](#), [SetFullname\(\)](#), [SetLastName\(\)](#), [toString\(\)](#), and [~BOI\(\)](#).

```
00078 {};
```

Here is the call graph for this function:

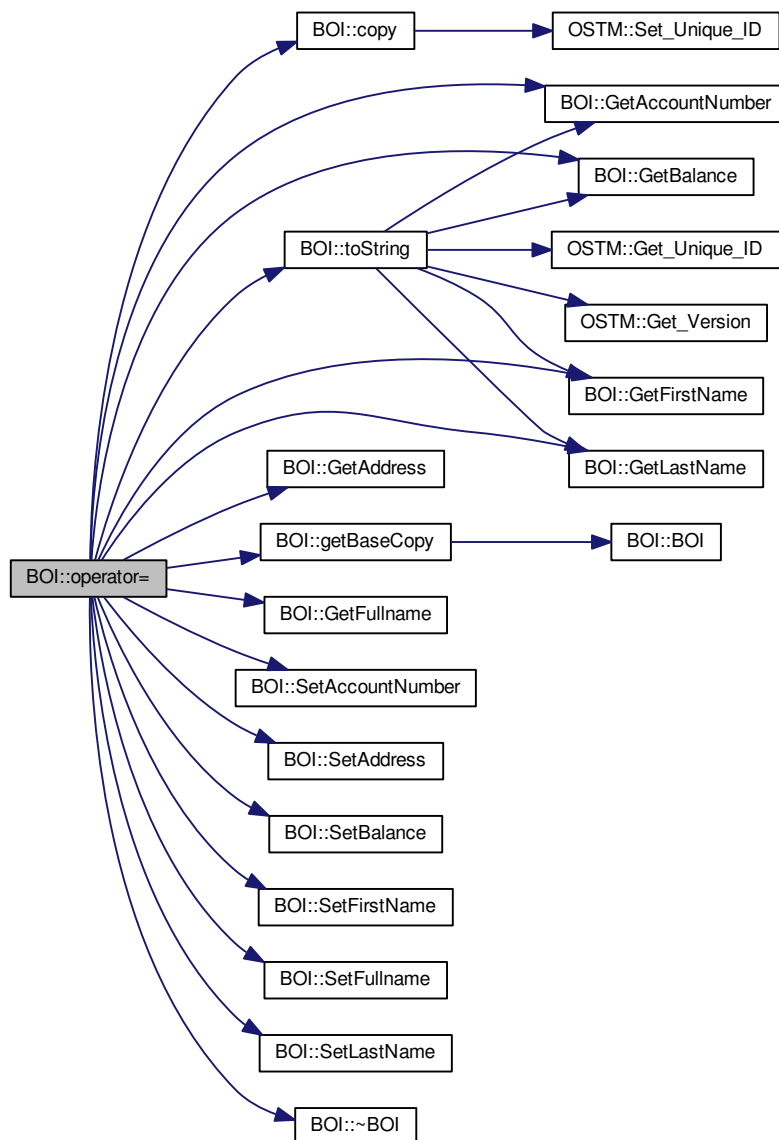

5.3.3.10 void BOI::SetAccountNumber (int *accountNumber*) [virtual]

SetAccountNumber setter for accountNumber private field.

Reimplemented from [BANK](#).

Definition at line 90 of file [BOI.cpp](#).

References [accountNumber](#).

Referenced by [operator=\(\)](#).

```
00090      {  
00091      this->accountNumber = accountNumber;  
00092  }
```

Here is the caller graph for this function:



5.3.3.11 void BOI::SetAddress (std::string *address*) [virtual]

SetAddress setter for address private field.

Reimplemented from [BANK](#).

Definition at line 66 of file [BOI.cpp](#).

References [address](#).

Referenced by [operator=\(\)](#).

```
00066      {  
00067      this->address = address;  
00068  }
```

Here is the caller graph for this function:



5.3.3.12 void BOI::SetBalance (double *balance*) [virtual]

SetBalance setter for balance private field.

Reimplemented from [BANK](#).

Definition at line 78 of file [BOI.cpp](#).

References [balance](#).

Referenced by [operator=\(\)](#).

```
00078      {  
00079      this->balance = balance;  
00080  }
```

Here is the caller graph for this function:



5.3.3.13 void BOI::SetFirstName (std::string *firstName*) [virtual]

SetFirstName setter for firstName private field.

Reimplemented from [BANK](#).

Definition at line 114 of file [BOI.cpp](#).

References [firstName](#).

Referenced by [operator=\(\)](#).

```
00114      {  
00115      this->firstName = firstName;  
00116  }
```

Here is the caller graph for this function:



5.3.3.14 void BOI::SetFullName (std::string *fullname*) [virtual]

SetFullName setter for fullname private field.

Reimplemented from [BANK](#).

Definition at line 126 of file [BOI.cpp](#).

References [fullname](#).

Referenced by [operator=\(\)](#).

```
00126                                     {  
00127     this->fullname = fullname;  
00128 }
```

Here is the caller graph for this function:



5.3.3.15 void BOI::SetLastName (std::string *lastName*) [virtual]

SetLastName setter for lastName private field.

Reimplemented from [BANK](#).

Definition at line 102 of file [BOI.cpp](#).

References [lastName](#).

Referenced by [operator=\(\)](#).

```
00102                                     {  
00103     this->lastName = lastName;  
00104 }
```

Here is the caller graph for this function:



5.3.3.16 void BOI::toString() [virtual]

toString function, displays the object values in formatted way

Reimplemented from [OSTM](#).


Definition at line 59 of file [BOI.cpp](#).

References [OSTM::Get_Unique_ID\(\)](#), [OSTM::Get_Version\(\)](#), [GetAccountNumber\(\)](#), [GetBalance\(\)](#), [GetFirstName\(\)](#), and [GetLastName\(\)](#).

Referenced by [operator=\(\)](#).

```
00060 {
00061     std::cout << "\nBOI BANK" << "\nUnique ID : " << this->Get_Unique_ID() << "\nInt account : "
    << this->GetAccountNumber() << "\nDouble value : " << this->
    GetBalance() << "\nFirst name: " << this->GetFirstName() << "\nLast name : " <<
    this->GetLastName() << "\nVersion number : " << this->Get_Version() << std::endl;
00062 }
```

Here is the call graph for this function:

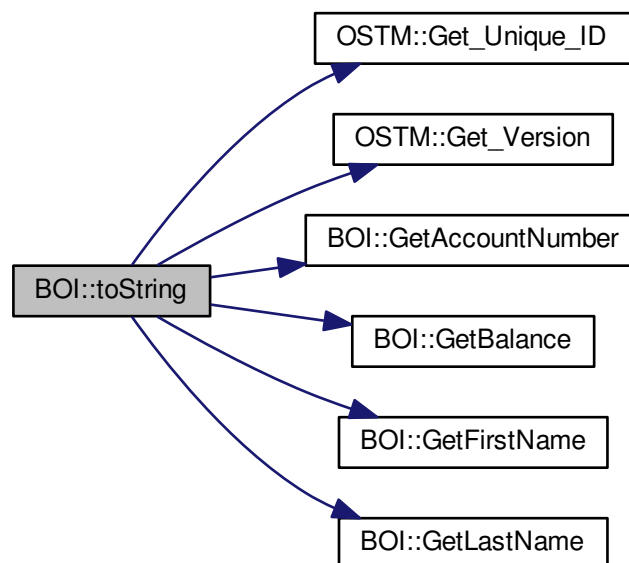

Here is the caller graph for this function:



5.3.4 Member Data Documentation

5.3.4.1 `int BOI::accountNumber` `[private]`

`accountNumber` `int` object private filed

Definition at line 123 of file [BOI.h](#).

Referenced by [BOI\(\)](#), [GetAccountNumber\(\)](#), [operator=\(\)](#), and [SetAccountNumber\(\)](#).

5.3.4.2 `std::string BOI::address` `[private]`

`address` `string` object private filed

Definition at line 131 of file [BOI.h](#).

Referenced by [BOI\(\)](#), [GetAddress\(\)](#), [operator=\(\)](#), and [SetAddress\(\)](#).

5.3.4.3 `double BOI::balance` `[private]`

`balance` `double` object private filed

Definition at line 127 of file [BOI.h](#).

Referenced by [BOI\(\)](#), [GetBalance\(\)](#), [operator=\(\)](#), and [SetBalance\(\)](#).

5.3.4.4 `std::string BOI::firstName` `[private]`

`firstName` `string` object private filed

Definition at line 115 of file [BOI.h](#).

Referenced by [BOI\(\)](#), [GetFirstName\(\)](#), [operator=\(\)](#), and [SetFirstName\(\)](#).

5.3.4.5 `std::string BOI::fullname` `[private]`

`fullname` `string` object private filed

Definition at line 111 of file [BOI.h](#).

Referenced by [BOI\(\)](#), [GetFullname\(\)](#), [operator=\(\)](#), and [SetFullname\(\)](#).

5.3.4.6 `std::string BOI::lastName` `[private]`

`lastName` `string` object private filed

Definition at line 119 of file [BOI.h](#).

Referenced by [BOI\(\)](#), [GetLastName\(\)](#), [operator=\(\)](#), and [SetLastName\(\)](#).


The documentation for this class was generated from the following files:

- [BOI.h](#)
- [BOI.cpp](#)


5.4 OSTM Class Reference

```
#include <OSTM.h>
```

Inheritance diagram for OSTM:

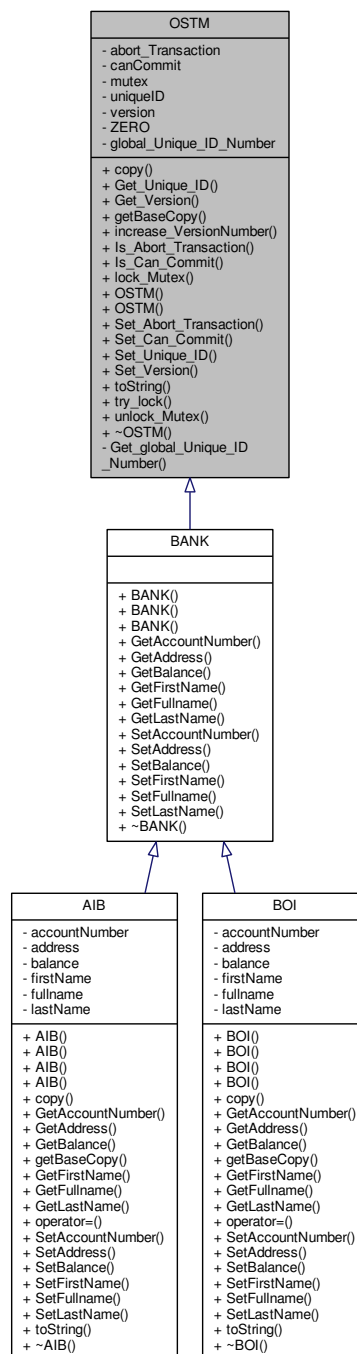

Collaboration diagram for OSTM:

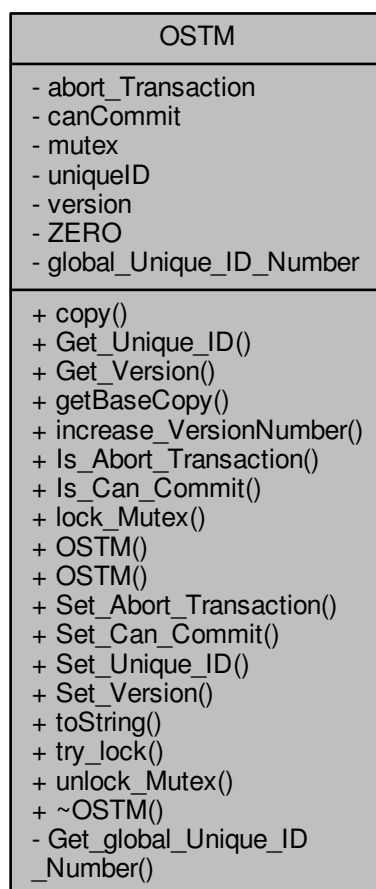

Public Member Functions

- virtual void [copy](#) (std::shared_ptr< [OSTM](#) > from, std::shared_ptr< [OSTM](#) > to)
The copy virtual method required for deep copy between objects within the transaction.
- int [Get_Unique_ID](#) () const
@82 Function <Get_Unique_ID> getter for uniqueID private field
- int [Get_Version](#) () const
@100 Function <Get_Version> setter for version private field
- virtual std::shared_ptr< [OSTM](#) > [getBaseCopy](#) (std::shared_ptr< [OSTM](#) > object)
The getbasecopy virtual method required for create a copy of the origin object/pointer and returning a copy of the object/pointer.
- void [increase_VersionNumber](#) ()
@108 Function <increase_VersionNumber> commit time increase the version number associated with the object
- bool [Is_Abort_Transaction](#) () const
@140 Function <Is_Abort_Transaction> return boolean value stored in the <abortTransaction> private field
- bool [Is_Can_Commit](#) () const
@124 Function <Is_Can_Commit> boolean function to determine the object can commit or need to rollback.

- void [lock_Mutex](#) ()
@145 Function <lock_Mutex> setter for mutex to lock the object
- [OSTM](#) ()
@21 Default constructor
- [OSTM](#) (int [_version_number_](#), int [_unique_id_](#))
@39 Custom Constructor Used to copying objects
- void [Set_Abort_Transaction](#) (bool [abortTransaction](#))
@132 Function <Set_Abort_Transaction> setter for abortTransaction private filed
- void [Set_Can_Commit](#) (bool [canCommit](#))
@117 Function <Set_Can_Commit> setter for canCommit private filed
- void [Set_Unique_ID](#) (int [uniqueID](#))
@75 Function <Set_Unique_ID> setter for uniqueID private field
- void [Set_Version](#) (int [version](#))
@92 Function <Set_Version> setter for version private filed
- virtual void [toString](#) ()
The toString function displaying/representing the object on the terminal is string format.
- bool [try_lock](#) ()
@162 Function <is_Locked> Boolean function to try lock the object. If the object not locked then locks and return True it otherwise return False.
- void [unlock_Mutex](#) ()
@154 Function <unlock_Mutex> setter for mutex to unlock the object
- virtual [~OSTM](#) ()

Private Member Functions

- int [Get_global_Unique_ID_Number](#) ()
@61 Get_global_Unique_ID_Number function, If <global_Unique_ID_Number> equals to 10000000 then reset back to ZERO, to make sure the value of global_Unique_ID_Number never exceed the MAX_INT value

Private Attributes

- bool [abort_Transaction](#)
- bool [canCommit](#)
- std::mutex [mutex](#)
- int [uniqueID](#)
- int [version](#)
- const int [ZERO](#) = 0

Static Private Attributes

- static int [global_Unique_ID_Number](#) = 0

5.4.1 Detailed Description

File: [OSTM.h](#) Author: Zoltan Fuzesi C00197361, IT Carlow, Software Engineering,

Supervisor : Joe Kehoe,

C++ Software Transactional Memory,

Created on December 18, 2017, 2:09 PM The [OSTM](#) class is the base class to all the inherited classes that intend to used with the Software Transactional memory library

Definition at line 23 of file [OSTM.h](#).

5.4.2 Constructor & Destructor Documentation

5.4.2.1 OSTM::OSTM()


@21 Default constructor

Definition at line 21 of file [OSTM.cpp](#).

References [abort_Transaction](#), [canCommit](#), [Get_global_Unique_ID_Number\(\)](#), [uniqueID](#), [version](#), and [ZERO](#).

```
00022 {
00023     /* @24 Integer field <version> indicates the version number of the inherited child object */
00024     this->version = ZERO;
00025     /* @26 Integer field <uniqueID> is a unique identifier assigned to every object registered in OSTM
library */
00026     this->uniqueID = Get_global_Unique_ID_Number();
00027     /* @28 Boolean value <canCommit> to determine the object can or cannot commit */
00028     this->canCommit = true;
00029     /* @30 Boolean field <abort_Transaction> to determine the object can or cannot commit */
00030     this->abort_Transaction = false;
00031 }
```

Here is the call graph for this function:



5.4.2.2 OSTM::OSTM(int _version_number_, int _unique_id_)

@39 Custom Constructor Used to copying objects

Parameters

<i>version_number</i>	Integer value used to create a copy of the object with the actual version
<i>unique_id</i>	Integer value used to create a copy of the object with the original unique ID

Definition at line 39 of file [OSTM.cpp](#).

References [abort_Transaction](#), [canCommit](#), [uniqueID](#), and [version](#).

```
00040 {
00041     /* @42 Integer field <version> indicates the version number of the inherited child object */
00042     this->uniqueID = _unique_id_;
00043     /* @44 Integer field <uniqueID> is a unique identifier assigned to every object registered in OSTM
library */
00044     this->version = _version_number_;
00045     /* @46 Boolean value <canCommit> to determine the object can or cannot commit */
00046     this->canCommit = true;
00047     /* @48 Boolean value <abort_Transaction> to determine the object can or cannot commit */
00048     this->abort_Transaction = false;
00049 }
```

5.4.2.3 OSTM::~~OSTM() [virtual]

@54 Default De-constructor

Definition at line 54 of file [OSTM.cpp](#).

```
00054     {
00055     /* Destroy the object. */
00056 }
```

5.4.3 Member Function Documentation

5.4.3.1 virtual void OSTM::copy (std::shared_ptr< OSTM > from, std::shared_ptr< OSTM > to) [inline], [virtual]

The copy virtual method required for deep copy between objects within the transaction.

See also

[copy](#) function implementation in inherited class class

Reimplemented in [BOI](#), and [AIB](#).

Definition at line 41 of file [OSTM.h](#).

```
00041 {};
```

5.4.3.2 int OSTM::Get_global_Unique_ID_Number () [private]

@61 Get_global_Unique_ID_Number function, If <global_Unique_ID_Number> equals to 10000000 then reset back to ZERO, to make sure the value of global_Unique_ID_Number never exceed the MAX_INT value

Returning global_Unique_ID_Number to the constructor


Definition at line 61 of file [OSTM.cpp](#).

References [global_Unique_ID_Number](#).

Referenced by [OSTM\(\)](#).

```
00061     {
00062     /* @64 Checking the global_Unique_ID_Number */
00063     if(global_Unique_ID_Number > 10000000)
00064     /* @65 Reset global_Unique_ID_Number to ZERO*/
00065     global_Unique_ID_Number = 0;
00066     /* @67 return static global_Unique_ID_Number */
00067     return ++global_Unique_ID_Number;
00068 }
```

Here is the caller graph for this function:



5.4.3.3 int OSTM::Get_Unique_ID () const

@82 Function <Get_Unique_ID> getter for uniqueID private field


Definition at line 82 of file [OSTM.cpp](#).

References [uniqueID](#).

Referenced by [toString\(\)](#), [AIB::toString\(\)](#), and [BOI::toString\(\)](#).

```
00083 {
00084     /* @85 return Object uniqueID */
00085     return uniqueID;
00086 }
```

Here is the caller graph for this function:

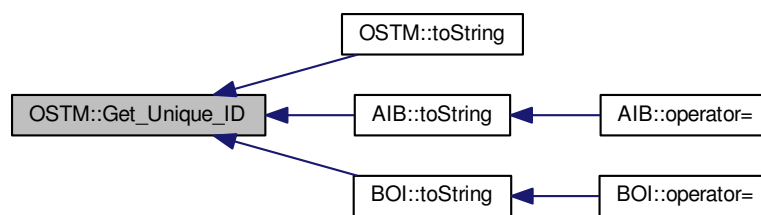

5.4.3.4 int OSTM::Get_Version () const

@100 Function <Get_Version> setter for version private filed


Definition at line 100 of file [OSTM.cpp](#).

References [version](#).

Referenced by [toString\(\)](#), [AIB::toString\(\)](#), and [BOI::toString\(\)](#).

```
00101 {
00102     /* return object version number */
00103     return version;
00104 }
```

Here is the caller graph for this function:

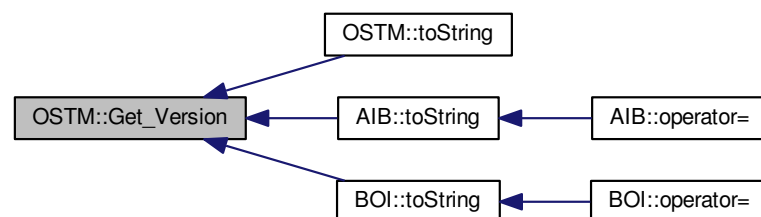

5.4.3.5 `virtual std::shared_ptr<OSTM> OSTM::getBaseCopy (std::shared_ptr< OSTM > object) [inline],
[virtual]`

The getbasecopy virtual method required for create a copy of the origin object/pointer and returning a copy of the object/pointer.

See also

[getBaseCopy](#) function implementation in child class

Reimplemented in [AIB](#), and [BOI](#).

Definition at line 46 of file [OSTM.h](#).

```
00046 {};
```

5.4.3.6 `void OSTM::increase_VersionNumber ()`

@108 Function <increase_VersionNumber> commit time increase the version number associated with the object


Definition at line 108 of file [OSTM.cpp](#).

References [version](#).

Referenced by [toString\(\)](#).

```
00109 {
00110     /* @111 increase object version number */
00111     this->version += 1;
00112 }
```

Here is the caller graph for this function:



5.4.3.7 `bool OSTM::Is_Abort_Transaction () const`

@140 Function <Is_Abort_Transaction> return boolean value stored in the <abortTransaction> private filed

Parameters

<code>abort_Transaction</code>	Boolean to determine the object can or cannot commit
--------------------------------	--


Definition at line 140 of file [OSTM.cpp](#).

References [abort_Transaction](#).

Referenced by [toString\(\)](#).

```
00140                                     {  
00141     /* @142 return abort_Transaction object boolean value */  
00142     return abort_Transaction;  
00143 }
```

Here is the caller graph for this function:



5.4.3.8 bool OSTM::Is_Can_Commit () const

@124 Function <Is_Can_Commit> boolean function to determin the object can comit or need to roolback.

Definition at line 124 of file [OSTM.cpp](#).

References [canCommit](#).

Referenced by [toString\(\)](#).

```
00124                                     {  
00125     /* @126 return canCommit boolean value TRUE/FALSE */  
00126     return canCommit;  
00127 }
```

Here is the caller graph for this function:



5.4.3.9 void OSTM::lock_Mutex ()

@145 Function <lock_Mutex> setter for mutex to lock the object

Definition at line 147 of file [OSTM.cpp](#).

References [mutex](#).

Referenced by [toString\(\)](#).

```
00147         {
00148     /* @149 Locking the mutex*/
00149     this->mutex.lock();
00150 }
```

Here is the caller graph for this function:

5.4.3.10 void OSTM::Set_Abort_Transaction (bool *abortTransaction*)

@132 Function <Set_Abort_Transaction> setter for abortTransaction private filed

Parameters

<i>abortTransaction</i>	Boolean to determine the object can or cannot commit
-------------------------	--


Definition at line 132 of file [OSTM.cpp](#).

References [abort_Transaction](#).

Referenced by [toString\(\)](#).

```
00132         {
00133     /* @134 set abort_Transaction object variable to parameter boolean value */
00134     this->abort_Transaction = abortTransaction;
00135 }
```

Here is the caller graph for this function:



5.4.3.11 void OSTM::Set_Can_Commit (bool *canCommit*)

@117 Function <Set_Can_Commit> setter for canCommit private filed

Parameters

<i>canCommit</i>	Boolean value to determine the object can or cannot commit
------------------	--

Definition at line 117 of file [OSTM.cpp](#).

References [canCommit](#).

Referenced by [toString\(\)](#).

```
00117                                     {
00118     /* @119 set canCommit object variable to parameter boolean value*/
00119     this->canCommit = canCommit;
00120 }
```

Here is the caller graph for this function:



5.4.3.12 void OSTM::Set_Unique_ID (int *uniqueID*)

@75 Function <Set_Unique_ID> setter for uniqueID private field

Parameters

<i>uniqueID</i>	int Every object inherit from OSTM class will include a version number that is unique for every object. The STM library used this value to find object within the transaction to make changes or comparism ith them.
-----------------	--


Definition at line 75 of file [OSTM.cpp](#).

References [uniqueID](#).

Referenced by [AIB::copy\(\)](#), [BOI::copy\(\)](#), and [toString\(\)](#).

```
00075                                     {
00076     /* @77 set object uniqueID to parameter integer value */
00077     this->uniqueID = uniqueID;
00078 }
```

Here is the caller graph for this function:

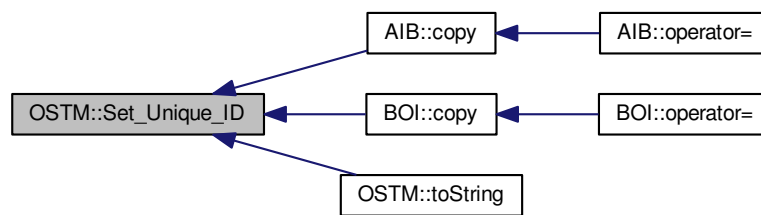

5.4.3.13 void OSTM::Set_Version (int *version*)

@92 Function <Set_Version> setter for version private filed

Parameters

<i>version</i>	integer The verion number ZERO by default when the object created. When a transaction make changes with the object, then the version number will be increased, to indicate the changes on the object.
----------------	---

Definition at line 92 of file [OSTM.cpp](#).

References [version](#).

Referenced by [toString\(\)](#).

```

00093 {
00094     /* @95 set object version to parameter integer value */
00095     this->version = version;
00096 }
  
```

Here is the caller graph for this function:



5.4.3.14 `virtual void OSTM::toString () [inline],[virtual]`

The `toString` function displaying/representing the object on the terminal is string format.

See also

[toString](#) function implementation in child class


Reimplemented in [AIB](#), and [BOI](#).

Definition at line 51 of file [OSTM.h](#).

References [canCommit](#), [Get_Unique_ID\(\)](#), [Get_Version\(\)](#), [increase_VersionNumber\(\)](#), [Is_Abort_Transaction\(\)](#), [Is_Can_Commit\(\)](#), [lock_Mutex\(\)](#), [Set_Abort_Transaction\(\)](#), [Set_Can_Commit\(\)](#), [Set_Unique_ID\(\)](#), [Set_Version\(\)](#), [try_lock\(\)](#), [uniqueID](#), [unlock_Mutex\(\)](#), and [version](#).

00051 {};

Here is the call graph for this function:

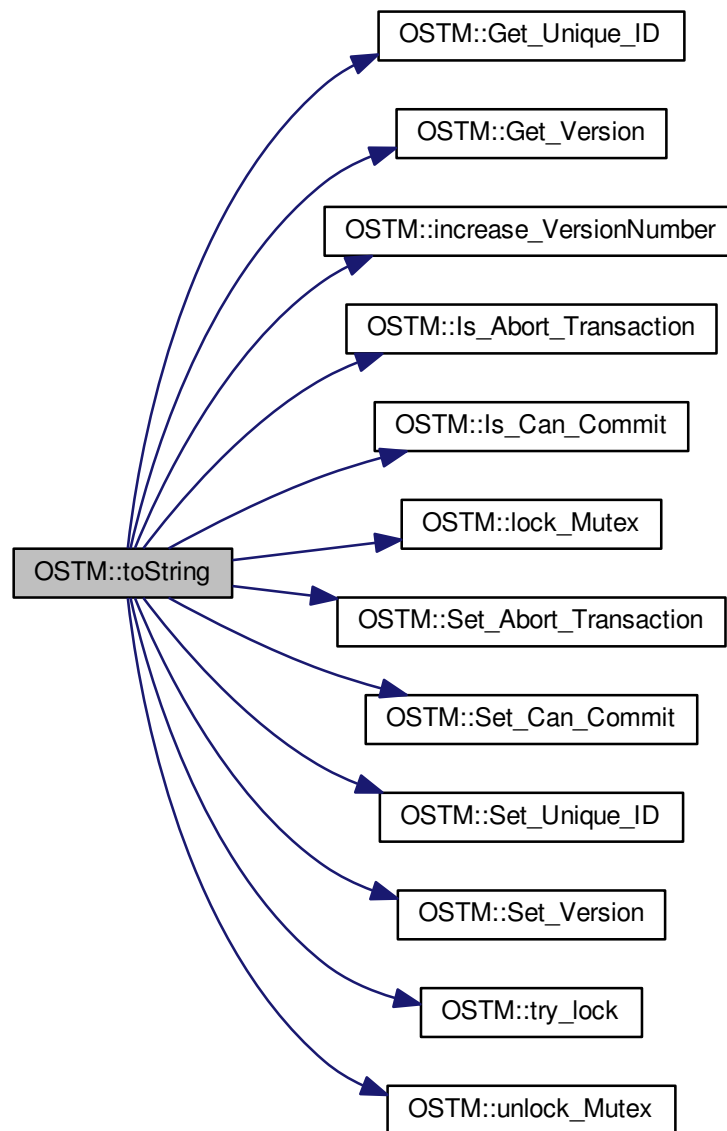

5.4.3.15 `bool OSTM::try_lock ()`

@162 Function `<is_Locked>` Boolean function to try lock the object. If the object not locked then locks and return True it otherwise return False.

Definition at line 162 of file `OSTM.cpp`.

References [mutex](#).

Referenced by [toString\(\)](#).

```

00162         {
00163         /* @164 Try to unlock the mutex, return TRUE if the lock was acquired successfully, otherwise return
00164         FALSE */
00164         return this->mutex.try_lock();
00165     }

```

Here is the caller graph for this function:



5.4.3.16 void OSTM::unlock_Mutex ()

@154 Function <unlock_Mutex> setter for mutex to unlock the object

Definition at line 154 of file [OSTM.cpp](#).

References [mutex](#).

Referenced by [toString\(\)](#).

```

00154         {
00155         /* @156 Locking the mutex */
00156         this->mutex.unlock();
00157     }

```

Here is the caller graph for this function:



5.4.4 Member Data Documentation

5.4.4.1 bool OSTM::abort_Transaction [private]

Boolean value <abort_Transaction> to determine the object can or cannot commit

Definition at line 125 of file [OSTM.h](#).

Referenced by [Is_Abort_Transaction\(\)](#), [OSTM\(\)](#), and [Set_Abort_Transaction\(\)](#).

5.4.4.2 `bool OSTM::canCommit` [private]

Boolean value <canCommit> to determine the object can or cannot commit

Definition at line 121 of file [OSTM.h](#).

Referenced by [Is_Can_Commit\(\)](#), [OSTM\(\)](#), [Set_Can_Commit\(\)](#), and [toString\(\)](#).

5.4.4.3 `int OSTM::global_Unique_ID_Number = 0` [static], [private]

Unique object number start at ZERO The value stored in the static class level <global_Unique_ID_Number> increase every [OSTM](#) type object creation.

Definition at line 130 of file [OSTM.h](#).

Referenced by [Get_global_Unique_ID_Number\(\)](#).

5.4.4.4 `std::mutex OSTM::mutex` [private]

Mutex lock <mutex> use to lock the object with transaction, to make sure only one transaction can access the object at the time

Definition at line 139 of file [OSTM.h](#).

Referenced by [lock_Mutex\(\)](#), [try_lock\(\)](#), and [unlock_Mutex\(\)](#).

5.4.4.5 `int OSTM::uniqueID` [private]

Object unique identifier Every object inherit from [OSTM](#) class will include a version number that is unique for every object. The STM library used this value to find object within the transaction to make changes or comparison with them.

Definition at line 117 of file [OSTM.h](#).

Referenced by [Get_Unique_ID\(\)](#), [OSTM\(\)](#), [Set_Unique_ID\(\)](#), and [toString\(\)](#).

5.4.4.6 `int OSTM::version` [private]

Object private version number. The version number ZERO by default when the object created. When a transaction make changes with the object, then the version number will be increased, to indicate the changes on the object.

Definition at line 111 of file [OSTM.h](#).

Referenced by [Get_Version\(\)](#), [increase_VersionNumber\(\)](#), [OSTM\(\)](#), [Set_Version\(\)](#), and [toString\(\)](#).

5.4.4.7 `const int OSTM::ZERO = 0` [private]

Integer <ZERO> meaningful string equivalent to 0

Definition at line 134 of file [OSTM.h](#).

Referenced by [OSTM\(\)](#).


The documentation for this class was generated from the following files:

- [OSTM.h](#)
- [OSTM.cpp](#)

5.5 TM Class Reference

```
#include <TM.h>
```

Collaboration diagram for TM:

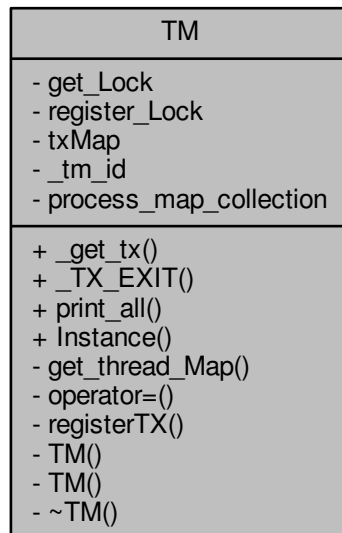

Public Member Functions

- `std::shared_ptr< TX > const _get_tx ()`

@81 _get_tx std::shared_ptr<TX>, return an trtransaction Object as a shared_ptr, if TX not exists then create and register.# If the transaction Object exists then increasing the nesting level within the Transaction Object.

- `void _TX_EXIT ()`

@108 _TX_EXIT void, when the thread calls the ostm_exit function in the transaction, and it will clear all elements from the shared global collection associated with the main process

- `void print_all ()`

@132 ONLY FOR TESTING print_all void function , print out all object key from txMAP collection associated with the main process.

Static Public Member Functions

- `static TM & Instance ()`

@31 Instance TM, Scott Meyer's Singleton creation, thread safe Transaction Manager instance creation.

Private Member Functions

- `std::map< std::thread::id, int > get_thread_Map ()`
@148 `get_thread_Map` `std::map`, returning a map to store all unique ID from all objects from all transactions within the main processes
- `TM & operator= (const TM &)=delete`
[TM](#) copy operator, prevent from copying the Transaction Manager.
- `void registerTX ()`
@45 `registerTX` void function, register a new [TX](#) Transaction object into ythe `txMap/Transaction Map` to manage all the transactions within the shared library. [TM](#) Transaction manager checking the Process ID existence in the process map collection, If not in the map then register.
- `TM ()=default`
- `TM (const TM &)=delete`
[TM](#) copy constructor, prevent from copying the Transaction Manager.
- `~TM ()=default`

Private Attributes

- `std::mutex get_Lock`
- `std::mutex register_Lock`
- `std::map< std::thread::id, std::shared_ptr< TX > > txMap`

Static Private Attributes

- `static pid_t _tm_id`
- `static std::map< pid_t, std::map< std::thread::id, int > > process_map_collection`

5.5.1 Detailed Description

Definition at line 70 of file [TM.h](#).

5.5.2 Constructor & Destructor Documentation

5.5.2.1 `TM::TM ()` [`private`], [`default`]

5.5.2.2 `TM::~TM ()` [`private`], [`default`]

5.5.2.3 `TM::TM (const TM &)` [`private`], [`delete`]

[TM](#) copy constructor, prevent from copying the Transaction Manager.

5.5.3 Member Function Documentation

5.5.3.1 `std::shared_ptr< TX > const TM::_get_tx ()`

@81 `_get_tx std::shared_ptr<TX>`, return an transaction Object as a `shared_ptr`, if `TX` not exists then create and register. # If the transaction Object exists then increasing the nesting level within the Transaction Object.

`_get_tx std::shared_ptr<TX>`, returning a shared pointer transaction object

Definition at line 81 of file `TM.cpp`.


References `get_Lock`, `registerTX()`, and `txMap`.

Referenced by `_nesting_()`, `_two_account_transfer_()`, and `main()`.


```

00082 {
00083
00084     /* @85 guard std::lock_guard, locks the get_Lock mutex, unlock automatically when goes out of the scope
get_Lock std::mutex, used by the lock_guard to protect txMap from race conditions */
00085     std::lock_guard<std::mutex> guard(get_Lock);
00086     /* @87 txMap try to find the TX Transaction object by it's actual thread ID if registred in the txMap
*/
00087     std::map<std::thread::id, std::shared_ptr<TX>>::iterator it = txMap.find(std::this_thread::get_id(
));
00088     /* @89 Check if iterator pointing to the end of the txMap then insert */
00089     if(it == txMap.end())
00090     {
00091         /* @92 If cannot find then call the register function to register the thread with a transaction */
00092         registerTX();
00093         /* @94 If it's registered first time then we need to find it after registration */
00094         it = txMap.find(std::this_thread::get_id());
00095     } else {
00096         /* @98 If transaction already registered, it means the thread participating in nested transactions,
and increase the nesting */
00097         it->second->increase_tx_nesting();
00098     }
00099     /* @101 Returning back the transaction (TX) object to the thread */
00100     return it->second;
00101 }
00102
00103 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

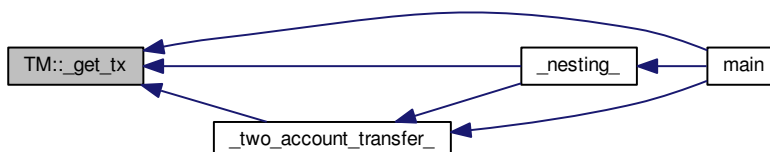

5.5.3.2 void TM::_TX_EXIT ()

@108 _TX_EXIT void, when the thread calls the ostm_exit function in the transaction, and it will clear all elements from the shared global collection associated with the main process

_TX_EXIT void function, the thread (TX object) calls the ostm_exit function from the transaction, and clear all elements from the shared global collection associated with the main process

Definition at line 108 of file TM.cpp.

References TX::ostm_exit(), process_map_collection, and txMap.

Referenced by main().

```

00108     {
00109         /* @110 Transaction manger create a local Transaction Object to access the TX class function without
nesting any transaction */
00110         TX tx(std::this_thread::get_id());
00111         /* @112 getppid() return the actual main process thread id, I used it to associate the Transactionas
with the main processes */
00112         pid_t ppid = getppid();
00113         /* @114 process_map_collection try to find the main process by it's ppid if registred in the library */
00114         std::map<pid_t, std::map< std::thread::id, int >>::iterator process_map_collection_Iterator =
TM::process_map_collection.find(ppid);
00115         /* @116 Check if iterator NOT pointing to the end of the process map then register */
00116         if (process_map_collection_Iterator != TM::process_map_collection.end()) {
00117             /* @118 Iterate through the process_map_collection to find all transaction associated with main
process */
00118             for (auto current = process_map_collection_Iterator->second.begin(); current !=
process_map_collection_Iterator->second.end(); ++current) {
00119                 /* @120 Delete all transaction associated with the actual main process */
00120                 txMap.erase(current->first);
00121             }
00122             /* @123 When all transaction deleted, delete the main process from the Transacion Manager */
00123             TM::process_map_collection.erase(ppid);
00124         }
00125         /* @126 TX class delete all Global Object shared between the transaction. This function calls only when
the main process exists to clear out memory */
00126         tx.ostm_exit();
00127     }

```

Here is the call graph for this function:



Here is the caller graph for this function:



5.5.3.3 `std::map< std::thread::id, int > TM::get_thread_Map ()` [private]


@148 `get_thread_Map` `std::map`, returning a map to store all unique ID from all objects from all transactions within the main processes

Definition at line 148 of file `TM.cpp`.

Referenced by `registerTX()`.

```
00148 {
00149     /* @150 thread_Map std::map< int, int > create a map to store int key and int value */
00150     std::map< std::thread::id, int > thread_Map;
00151     /* @152 return the map */
00152     return thread_Map;
00153 }
```

Here is the caller graph for this function:



5.5.3.4 `TM & TM::Instance ()` [static]

@31 Instance `TM`, Scott Meyer's Singleton creation, thread safe Transaction Manager instance creation.

Scott Meyer's Singleton creation, thread safe Transaction Manager instance creation.

Definition at line 31 of file `TM.cpp`.

References `_tm_id`.

Referenced by `main()`.

```
00031 {
00032     /* @33 _instance TM, static class reference to the instance of the Transaction Manager class */
00033     static TM _instance;
00034     /* @35 _instance ppid, assigning the process id whoever created the Singleton instance */
00035     _instance._tm_id = getpid();
00036     /* @37 return Singleton instance */
00037     return _instance;
00038 }
```

Here is the caller graph for this function:



5.5.3.5 TM& TM::operator= (const TM &) [private],[delete]

TM copy operator, prevent from copying the Transaction Manager.

5.5.3.6 void TM::print_all ()

@132 ONLY FOR TESTING print_all void function , print out all object key from txMAP collection associated with the main process.

ONLY FOR TESTING! print_all void function, prints all object in the txMap

Definition at line 132 of file TM.cpp.

References [get_Lock](#), and [txMap](#).

Referenced by [main\(\)](#).

```

00132     {
00133         /* @134 Locking the print function */
00134         get_Lock.lock();
00135         /* @136 Iterate through the txMap to print out the thread id's*/
00136         for (auto current = txMap.begin(); current != txMap.end(); ++current) {
00137             /* @138 Print key (thread number)*/
00138             std::cout << "KEY : " << current->first << std::endl;
00139         }
00140         /* @140 Unlocking the print function*/
00141         get_Lock.unlock();
00142     }

```

Here is the caller graph for this function:



5.5.3.7 void TM::registerTX () [private]

@45 registerTX void function, register a new TX Transaction object into ythe txMap/Transaction Map to manage all the transactions within the shared library. TM Transaction manager checking the Process ID existence in the process map collection, If not in the map then register.

Definition at line 45 of file TM.cpp.

References [get_thread_Map\(\)](#), [process_map_collection](#), [register_Lock](#), and [txMap](#).

Referenced by [_get_tx\(\)](#).

```


00046 {
00047     /* @49 guard std::lock_guard, locks the register_Lock mutex, unlock automatically when goes out of the
scope register_Lock std::mutex, used by the lock_guard to protect shared map from race conditions */
00048     std::lock_guard<std::mutex> guard(register_Lock);
00049     /* @51 getppid() return the actual main process thread id, I used it to associate the Transaction as
with the main processes */
00050     pid_t ppid = getppid();
00051
00052     /* @53 process_map_collection try to find the main process by it's ppid if registered in the library */
00053     std::map<pid_t, std::map< std::thread::id, int >>::iterator process_map_collection_Iterator =
TM::process_map_collection.find(ppid);
00054     /* @55 Check if iterator pointing to the end of the process map then register */
00055     if (process_map_collection_Iterator == TM::process_map_collection.end()) {
00056         /* @57 Require new map to insert to the process map as a value by the ppid key */
00057         std::map< std::thread::id, int >map = get_thread_Map();
00058         /* @59 Register main process/application to the global map */
00059         TM::process_map_collection.insert({ppid, map});
00060     }
00061 }
00062 /* @63 txMap std::map, collection to store all transaction created by the Transaction Manager */
00063 std::map<std::thread::id, std::shared_ptr< TX>::iterator it = txMap.find(
std::this_thread::get_id());
00064 /* @65 Check if iterator pointing to the end of the txMap then insert */
00065 if (it == txMap.end()) {
00066     /* @67 Create a new Transaction Object as a shared pointer */
00067     std::shared_ptr<TX> _transaction_object(new TX(std::this_thread::get_id()));
00068     /* @69 txMap insert the new transaction into the txMap by the threadID key */
00069     txMap.insert({std::this_thread::get_id(), _transaction_object});
00070     /* @71 Get the map if the transaction registered first time */
00071     process_map_collection_Iterator = TM::process_map_collection.find(ppid);
00072     /* @73 Insert to the GLOBAL MAP as a helper to clean up at end of main process. The value 1 is not
used yet */
00073     process_map_collection_Iterator->second.insert({std::this_thread::get_id(), 1});
00074 }
00075 }

```

Here is the call graph for this function:



Here is the caller graph for this function:



5.5.4 Member Data Documentation

5.5.4.1 pid_t TM::tm_id [static],[private]

Definition at line 115 of file [TM.h](#).

Referenced by [Instance\(\)](#).

5.5.4.2 `std::mutex TM::get_Lock` [private]

Definition at line 111 of file [TM.h](#).

Referenced by [_get_tx\(\)](#), and [print_all\(\)](#).

5.5.4.3 `std::map< pid_t, std::map< std::thread::id, int > > TM::process_map_collection` [static], [private]

Definition at line 95 of file [TM.h](#).

Referenced by [_TX_EXIT\(\)](#), and [registerTX\(\)](#).

5.5.4.4 `std::mutex TM::register_Lock` [private]

Definition at line 107 of file [TM.h](#).

Referenced by [registerTX\(\)](#).

5.5.4.5 `std::map<std::thread::id, std::shared_ptr<TX> > TM::txMap` [private]

Definition at line 91 of file [TM.h](#).

Referenced by [_get_tx\(\)](#), [_TX_EXIT\(\)](#), [print_all\(\)](#), and [registerTX\(\)](#).


The documentation for this class was generated from the following files:

- [TM.h](#)
- [TM.cpp](#)

5.6 TX Class Reference

```
#include <TX.h>
```


Collaboration diagram for TX:

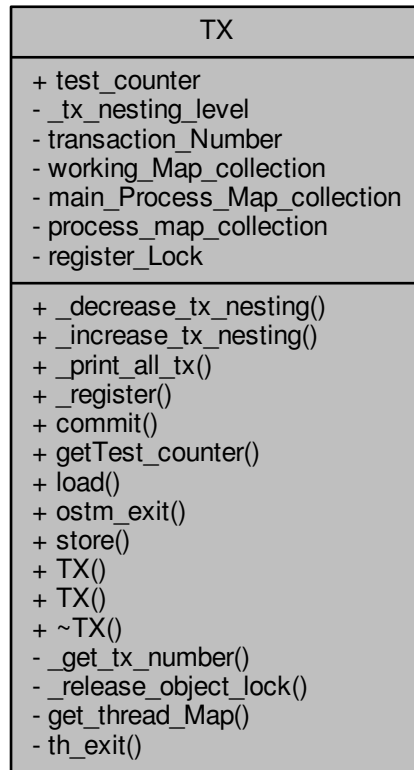

Public Member Functions

- void [_decrease_tx_nesting](#) ()
@279 _decrease_tx_nesting decrease the value stored in _tx_nesting_level by one, when outer transactions commit
- void [_increase_tx_nesting](#) ()
@272 _increase_tx_nesting increase the value stored in _tx_nesting_level by one, indicate that the transaction was nested
- void [_print_all_tx](#) ()
- void [_register](#) (std::shared_ptr< [OSTM](#) > object)
register void, receives an std::shared_ptr<OSTM> that point to the original memory space to protect from reca conditions
- bool [commit](#) ()
@176 commit function, returns boolean value TRUE/FALSE depends on the action taken within the function. if commit happens return TRUE, otherwise return FALSE, indicate the transaction muist restart.
- int [getTest_counter](#) ()
@287 getTest_counter TESTING ONLY!!! returning the value of the test_counter stored, representing the number of rollbacks
- std::shared_ptr< [OSTM](#) > [load](#) (std::shared_ptr< [OSTM](#) > object)
@137 load std::shared_ptr<OSTM>, returning an [OSTM](#) type shared pointer, that is copy of the original pointer stored in the working map, to work with during transaction life time
- void [ostm_exit](#) ()

- @68 ostm_exit void, clear all elements from the shared global collections associated with the main process*
- void [store](#) (std::shared_ptr< [OSTM](#) > object)
- @157 store void, receive an [OSTM](#) type shared pointer object to store the changes with the transaction copy object*
- [TX](#) (std::thread::id id)
- @36 Custom Constructor*
- [TX](#) (const [TX](#) &orig)
- [~TX](#) ()
- @45 De-constructor*

Static Public Attributes

- static int [test_counter](#) = 0

Private Member Functions

- const std::thread::id [_get_tx_number](#) () const
- @294 _get_tx_number, returning the thread id that has assigned the given transaction*
- void [_release_object_lock](#) ()
- @253 _release_object_lock void function, is get called from commit function, with the purpose to release the locks on all the objects participating in the transaction*
- std::map< int, int > [get_thread_Map](#) ()
- @301 get_thread_Map, returning a map to store all unique ID from all objects from all transactions within the main process*
- void [th_exit](#) ()
- @52 th_exit void, delete all std::shared_ptr<[OSTM](#)> elements from working_Map_collection, that store pointers to working objects*

Private Attributes

- int [_tx_nesting_level](#)
- std::thread::id [transaction_Number](#)
- std::map< int, std::shared_ptr< [OSTM](#) > > [working_Map_collection](#)

Static Private Attributes

- static std::map< int, std::shared_ptr< [OSTM](#) > > [main_Process_Map_collection](#)
- static std::map< pid_t, std::map< int, int > > [process_map_collection](#)
- static std::mutex [register_Lock](#)

Friends

- class [TM](#)

5.6.1 Detailed Description

Definition at line 29 of file [TX.h](#).

5.6.2 Constructor & Destructor Documentation

5.6.2.1 TX::TX (std::thread::id id)

@36 Custom Constructor

Parameters

<i>id</i>	std::thread::id, represent the transaction number when to the TransactionManager
-----------	--

Definition at line 36 of file [TX.cpp](#).

References [_tx_nesting_level](#), and [transaction_Number](#).

```

00036         {
00037         /* @38 Integer field <transaction_Number> indicates the transaction number to the Transaction manager
00038         */
00038         this->transaction_Number = id;
00039         /* @40 Integer field <_tx_nesting_level> indicates the nesting level to the transaction itself */
00040         this->_tx_nesting_level = 0;
00041     }
```

5.6.2.2 TX::~TX ()

@45 De-constructor

Definition at line 45 of file [TX.cpp](#).

```

00045     {
00046     /* Destroy the object. */
00047 }
```

5.6.2.3 TX::TX (const TX & orig)

5.6.3 Member Function Documentation

5.6.3.1 void TX::_decrease_tx_nesting ()

@279 _decrease_tx_nesting decrease the value stored in _tx_nesting_level by one, when outer transactions commit

Definition at line 279 of file [TX.cpp](#).

References [_tx_nesting_level](#).

Referenced by [commit\(\)](#).

```

00279         {
00280         /* @281 Decrease transaction nesting level */
00281         this->_tx_nesting_level -= 1;
00282     ;
00283 }
```

Here is the caller graph for this function:



5.6.3.2 const std::thread::id TX::_get_tx_number () const [private]

@294 _get_tx_number, returning the thread id that has assigned the given transaction

_get_tx_number, returning the transaction unique identifier

Definition at line 294 of file TX.cpp.

References [transaction_Number](#).

```
00294
00295     /* @296 Return the transaction nuber */
00296     return transaction_Number;
00297 }
```

5.6.3.3 void TX::_increase_tx_nesting ()

@272 _increase_tx_nesting increase the value stored in _tx_nesting_level by one, indicate that the transaction was nested

Definition at line 272 of file TX.cpp.

References [_tx_nesting_level](#).

```
00272
00273     /* @274 Increase transaction nesting level */
00274     this->_tx_nesting_level += 1;
00275 }
```

5.6.3.4 void TX::_print_all_tx ()

@311 _print_all_tx, only for testing! Prints all transaction associated with the main procees.!

Definition at line 311 of file TX.cpp.

References [process_map_collection](#), and [working_Map_collection](#).

```
00311
00312     /* @313 initialise Iterator */
00313     std::map< int, std::shared_ptr<OSTM> >::iterator it;
00314     /* @315 getppid() return the actual main process thread id, I used it to associate the Transactionas
with the main processes */
00315     pid_t ppid = getppid();
00316     /* '317 initialize and assign Iterator to process_map_collection, by the main process id (ppid) */
00317     std::map<pid_t, std::map< int, int >::iterator process_map_collection_Iterator =
TX::process_map_collection.find(ppid);
00318     /* @319 If there is an entry associated with the process then print out all transactions. */
00319     if (process_map_collection_Iterator != TX::process_map_collection.end()) {
00320         /* @321 Iterate through process_map_collection*/
00321         for (auto current = process_map_collection_Iterator->second.begin(); current !=
process_map_collection_Iterator->second.end(); ++current) {
00322             /* @323 Assign value to iterator */
00323             it = working_Map_collection.find(current->first);
00324             /* @325 If value found, then print it */
00325             if(it != working_Map_collection.end()){
00326                 /* @327 print out the transaction number */
00327                 std::cout << "[Unique number ] : " <<it->second->Get_Unique_ID() << std::endl;
00328             }
00329         }
00330     }
00331 }
```

5.6.3.5 void TX::_register (std::shared_ptr< OSTM > object)

register void, receives an std::shared_ptr<OSTM> that point to the original memory space to protect from reca conditions

Parameters

<i>object</i>	std::shared_ptr<OSTM>, is an original shared pointer point to the object memory space
---------------	---

Definition at line 96 of file TX.cpp.

References [get_thread_Map\(\)](#), [main_Process_Map_collection](#), [process_map_collection](#), [register_Lock](#), and [working_Map_collection](#).

```

00096                                     {
00097     /* @98 register_Lock(mutex) shared lock between all transaction. MUST USE SHARED LOCK TO PROTECT SHARED
GLOBAL MAP/COLLECTION */
00098     std::lock_guard<std::mutex> guard(TX::register_Lock);
00099     /* @100 RUNTIME ERROR. Check for null pointer ! Null pointer can cause segmentation fault!!! */
00100     if(object == nullptr){
00101         throw std::runtime_error(std::string("[RUNTIME ERROR : NULL POINTER IN REGISTER FUNCTION]"));
00102     }
00103     /* @104 getppid() return the actual main process thread id, I used it to associate the Transactionas
with the main processes */
00104     pid_t ppid = getppid();
00105     /* @106 Declare and initialize Iterator for process_map_collection, find main process*/
00106     std::map<pid_t, std::map< int, int >>::iterator process_map_collection_Iterator =
TX::process_map_collection.find(ppid);
00107     /* @108 If iterator cannot find main process, then register*/
00108     if (process_map_collection_Iterator == TX::process_map_collection.end()) {
00109         /* @110 Create new empty map */
00110         std::map< int, int >map = get_thread_Map();
00111         /* @112 Register main process/application to the global map */
00112         TX::process_map_collection.insert({ppid, map});
00113         /* @114 Get the map if registered first time */
00114         process_map_collection_Iterator = TX::process_map_collection.find(ppid);
00115     }
00116     /* @117 Declare and initialize Iterator for main_Process_Map_collection, find by original object */
00117     std::map<int, std::shared_ptr<OSTM>>::iterator main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find(object->Get_Unique_ID());
00118     /* @119 If object cannot find, then register */
00119     if (main_Process_Map_collection_Iterator == TX::main_Process_Map_collection
.end()) {
00120         /* '121 Insert the origin object to the GLOBAL MAP shared between transactions */
00121         TX::main_Process_Map_collection.insert({object->Get_Unique_ID(),
object});
00122         /* @123 Insert object ID to the GLOBAL MAP as a helper to clean up at end of main process, Second
value (1) not specified yet */
00123         process_map_collection_Iterator->second.insert({object->Get_Unique_ID(), 1});
00124     }
00125     /* @126 Declare and initialize Iterator for working_Map_collection, find copy of the original object */
00126     std::map< int, std::shared_ptr<OSTM> >::iterator working_Map_collection_Object_Shared_Pointer_Iterator
= working_Map_collection.find(object->Get_Unique_ID());
00127     /* @128 If copy of the object not found, then register */
00128     if (working_Map_collection_Object_Shared_Pointer_Iterator ==
working_Map_collection.end()) {
00129         /* @130 Register transaction own copy of the original object */
00130         working_Map_collection.insert({object->Get_Unique_ID(), object->getBaseCopy(
object)});
00131     }
00132 }

```

Here is the call graph for this function:



5.6.3.6 void TX::_release_object_lock() [private]

@253 _release_object_lock void function, is get called from commit function, with the purpose to release the locks on all the objects participating in the transaction

_release_object_lock, Release the locks on all Shared global objects used by the transaction

Definition at line 253 of file TX.cpp.

References [main_Process_Map_collection](#), and [working_Map_collection](#).


Referenced by [commit\(\)](#).

```

00253         {
00254             /* @255 Declare Iterator for working_Map_collection */
00255             std::map< int, std::shared_ptr<OSTM> >::iterator working_Map_collection_Object_Shared_Pointer_Iterator;
00256             /* @255 Declare Iterator for working_Map_collection */
00257             std::map<int, std::shared_ptr<OSTM>>::iterator main_Process_Map_collection_Iterator;
00258             for (working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.begin(); working_Map_collection_Object_Shared_Pointer_Iterator
!= working_Map_collection.end();
working_Map_collection_Object_Shared_Pointer_Iterator++) {
00259                 /* @260 Find Global shared original object by the transaction object unique ID*/
00260                 main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find((
working_Map_collection_Object_Shared_Pointer_Iterator->second)->Get_Unique_ID());
00261                 /* @262 If object found, then release lock*/
00262                 if (main_Process_Map_collection_Iterator !=
TX::main_Process_Map_collection.end()) {
00263                     /* @264 Release object lock */
00264                     (main_Process_Map_collection_Iterator)->second->unlock_Mutex();
00265                 }
00266             }
00267 }

```

Here is the caller graph for this function:



5.6.3.7 bool TX::commit()

@176 commit function, returns boolean value TRUE/FALSE depends on the action taken within the function. if commit happens return TRUE, otherwise return FALSE, indicate the transaction must restart.

Definition at line 177 of file TX.cpp.

References [_decrease_tx_nesting\(\)](#), [_release_object_lock\(\)](#), [_tx_nesting_level](#), [main_Process_Map_collection](#), [th_exit\(\)](#), and [working_Map_collection](#).

```

00177         {
00178             /* @179 Declare can_Commit boolean variable */
00179             bool can_Commit = true;
00180             /* @182 Dealing with nested transactions first. if nesting level bigger than ZERO do not commit yet */
00181             if (this->tx_nesting_level > 0) {
00182                 /* @183 Decrease nesting level @see _decrease_tx_nesting() */
00183                 _decrease_tx_nesting();
00184                 return true;
00185             }
00186             /* @187 Declare and initialize Iterator for working_Map_collection */
00187             std::map< int, std::shared_ptr<OSTM> >::iterator working_Map_collection_Object_Shared_Pointer_Iterator;
00188             /* @189 Declare and initialize Iterator for main_Process_Map_collectio */
00189             std::map<int, std::shared_ptr<OSTM>>::iterator main_Process_Map_collection_Iterator;
00190             /* @191 Iterate through the working_Map_collection, for all associated copy objects */
00191             for (working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.begin(); working_Map_collection_Object_Shared_Pointer_Iterator
!= working_Map_collection.end();
working_Map_collection_Object_Shared_Pointer_Iterator++) {
00192                 /* @193 Find the Original object in the Shared global collection by the copy object unique ID */
00193                 main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find(
working_Map_collection_Object_Shared_Pointer_Iterator->second->Get_Unique_ID());
00194                 /* @195 RUNTIME ERROR. If no object found ! Null pointer can cause segmentation fault!!! */
00195                 if (main_Process_Map_collection_Iterator ==
TX::main_Process_Map_collection.end())
00196                 {
00197                     throw std::runtime_error(std::string("[RUNTIME ERROR : CAN'T FIND OBJECT COMMIT FUNCTION]"));
00198                 }
00199             }
00200             /* @200 Busy waiting WHILE try_lock function return false, If the object locked by another
transaction, then wait until it's get unlocked, then lock it */
00201             while (! (main_Process_Map_collection_Iterator->second->try_lock());
00202                 /* @203 Compare the original global object version number with the working object version number.
If the version number not same, then it cannot commit */
00203                 if (main_Process_Map_collection_Iterator->second->Get_Version() >
working_Map_collection_Object_Shared_Pointer_Iterator->second->Get_Version()) {
00204                     /* @2005 Set object boolean value to FALSE, cannot commit */
00205                     working_Map_collection_Object_Shared_Pointer_Iterator->second->Set_Can_Commit(false);
00206                     /* @207 Set canCommit false Indicate rollback must happen */
00207                     can_Commit = false;
00208                     break;
00209                 } else {
00210                     /* @210 If version number are has same value set object boolean value to TRUE */
00211                     working_Map_collection_Object_Shared_Pointer_Iterator->second->Set_Can_Commit(true);
00212                 }
00213             }
00214             /* @214 IF can_Commit boolean value setted for FALSE then rollback all copy object in the transaction
to the Global object values */
00215             if (!can_Commit) {
00216                 /* @217 iterate through all transaction copy objects one by one */
00217                 for (working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.begin(); working_Map_collection_Object_Shared_Pointer_Iterator
!= working_Map_collection.end();
working_Map_collection_Object_Shared_Pointer_Iterator++) {
00218                     /* @219 Find the Global shared object by the transaction copy object unique ID */
00219                     main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find(
working_Map_collection_Object_Shared_Pointer_Iterator->second->Get_Unique_ID());
00220                     /* @221 Copy all Global shared original objects changed values by another transaction to the
transaction copy objects */
00221                     (working_Map_collection_Object_Shared_Pointer_Iterator->second->copy(
working_Map_collection_Object_Shared_Pointer_Iterator->second, main_Process_Map_collection_Iterator->second);
00222                 }
00223                 /* @224 When the transaction finish to change copying all values from original objects to local
copy, then release all Global shared objects. @see _release_object_lock() */
00224                 _release_object_lock();
00225                 /* @226 Return FALSE to indicate the transaction must restart */
00226                 return false;
00227             } else {
00228                 /* @229 Iterate through working_map_collection. If no conflict detected in early stage in the
transaction, then commit all the local changes to shared Global objects */
00229                 for (working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.begin(); working_Map_collection_Object_Shared_Pointer_Iterator
!= working_Map_collection.end();
working_Map_collection_Object_Shared_Pointer_Iterator++) {
00230                     /* @231 Find the Global shared object by the transaction copy object unique ID */
00231                     main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find(
working_Map_collection_Object_Shared_Pointer_Iterator->second->Get_Unique_ID());
00232                     /* @233 If Global shared object found then commit changes */
00233                     if (main_Process_Map_collection_Iterator !=
TX::main_Process_Map_collection.end()) {
00234                         /* @235 Copy over local transaction object values to original Global object */
00235                         (main_Process_Map_collection_Iterator->second->copy(
main_Process_Map_collection_Iterator->second, working_Map_collection_Object_Shared_Pointer_Iterator->second);
00236                         /* @237 Increase the version number in the original pointer */


```

```

00237         main_Process_Map_collection_Iterator->second->increase_VersionNumber();
00238         /* @195 RUNTIME ERROR. If no object found ! Null pointer can cause segmentation fault!!! */
00239     } else { throw std::runtime_error(std::string("[RUNTIME ERROR : CAN'T FIND OBJECT COMMIT
FUNCTION]")); }; }
00240     }
00241     /* @242 When the transaction finish with commit all changes, then release all Global shared
objects. @see _release_object_lock() */
00242     _release_object_lock();
00243     /* @244 Transaction object clean up all associated values, clean memory. @see th_exit() */
00244     this->th_exit();
00245     /* @246 Return TRUE, indicate the transaction has finished. */
00246     return true;
00247 }
00248 }

```

Here is the call graph for this function:

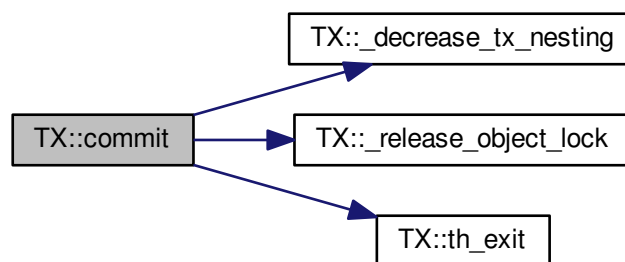

5.6.3.8 `std::map< int, int > TX::get_thread_Map ()` [private]

@301 `get_thread_Map`, returning a map to store all unique ID from all objects from all transactions within the main process

`get_thread_Map`, returning and map to insert to the `process_map_collection` as an inner value

Definition at line 301 of file [TX.cpp](#).

Referenced by [_register\(\)](#).

```

00301     {
00302     /* @303 initialize empty map hold int key and values*/
00303     std::map< int, int > thread_Map;
00304     /* @305 Return the map*/
00305     return thread_Map;
00306 }

```

Here is the caller graph for this function:



5.6.3.9 int TX::getTest_counter ()

@287 getTest_counter TESTING ONLY!!! returning the value of the test_counter stored, representing the number of rollbacks

Definition at line 287 of file TX.cpp.

References [test_counter](#).

```
00287     {
00288     /* @289 return class level value hold by test_counter variable */
00289     return TX::test_counter;
00290 }
```

5.6.3.10 std::shared_ptr< OSTM > TX::load (std::shared_ptr< OSTM > object)

@137 load std::shared_ptr<OSTM>, returning an [OSTM](#) type shared pointer, that is copy of the original pointer stored in the working map, to work with during transaction life time

Parameters

<i>object</i>	std::shared_ptr<OSTM>, used as a reference to find transaction copy object by the object unique ID
---------------	--

Definition at line 137 of file TX.cpp.

References [working_Map_collection](#).

```
00137     {
00138     /* @139 Declare and initialize Iterator for working_Map_collection */
00139     std::map< int, std::shared_ptr<OSTM> >::iterator working_Map_collection_Object_Shared_Pointer_Iterator;
00140     /* @141 RUNTIME ERROR. Check for null pointer ! Null pointer can cause segmentation fault!!! */
00141     if(object == nullptr){
00142         throw std::runtime_error(std::string("[RUNTIME ERROR : NULL POINTER IN LOAD FUNCTION]") );
00143     }
00144     /* @145 Find copy object in working_Map_collection by the object unique ID*/
00145     working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.find(object->Get_Unique_ID());
00146     /* @147 If object found, then return it */
00147     if (working_Map_collection_Object_Shared_Pointer_Iterator !=
working_Map_collection.end()) {
00148         /* @149 Returning a copy of the working copy object */
00149         return working_Map_collection_Object_Shared_Pointer_Iterator->second->getBaseCopy (
working_Map_collection_Object_Shared_Pointer_Iterator->second);
00150     /* @151 If no object found, throw runtime error */
00151     } else { throw std::runtime_error(std::string("[RUNTIME ERROR : NO OBJECT FOUND LOAD FUNCTION]") );}
00152 }
```

5.6.3.11 void TX::ostm_exit ()

@68 ostm_exit void, clear all elements from the shared global collections associated with the main process

Parameters

<i>main_Process_Map_collection</i>	std::map, store all std::shared_ptr<OSTM> from all transaction shared between multiple processes
<i>process_map_collection</i>	std::map, store all unique id from all transaction within main process DO NOT CALL THIS METHOD EXPLICITLY!!!!!! WILL DELETE ALL PROCESS ASSOCIATED ELEMENTS!!!!

Definition at line 68 of file [TX.cpp](#).

References [main_Process_Map_collection](#), and [process_map_collection](#).


Referenced by [TM::TX_EXIT\(\)](#).

```

00068     {
00069         /* @70 Declare Iterator main_Process_Map_collection_Iterator */
00070         std::map<int, std::shared_ptr<OSTM>>::iterator main_Process_Map_collection_Iterator;
00071         /* @72 getpid() return the actual main process thread id, I used it to associate the Transactionas
with the main processes */
00072         pid_t ppid = getpid();
00073         /* @74 process_map_collection try to find the main process by it's ppid if registered in the library */
00074         std::map<pid_t, std::map< int, int >::iterator process_map_collection_Iterator =
TX::process_map_collection.find(ppid);
00075         /* @76 Check if iterator NOT pointing to the end of the process_map_collection then remove all
associated elements */
00076         if (process_map_collection_Iterator != TX::process_map_collection.end()) {
00077             /* @78 Iterate through the process_map_collection to find all transaction associated with main
process */
00078             for (auto current = process_map_collection_Iterator->second.begin(); current !=
process_map_collection_Iterator->second.end(); ++current) {
00079                 /* @80 Find the OSTM object in the Global shared map */
00080                 main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find(current->first);
00081                 /* @82 If object found then delete it*/
00082                 if (main_Process_Map_collection_Iterator !=
TX::main_Process_Map_collection.end()){
00083                     /* @84 Delete element from shared main_Process_Map_collection by object by the unique key,
and the shaed_ptr will destroy automatically */
00084                     TX::main_Process_Map_collection.erase(
main_Process_Map_collection_Iterator->first);
00085                 }
00086             }
00087             /* @88 Delete main process from Process_map_collection */
00088             TX::process_map_collection.erase(process_map_collection_Iterator->first);
00089         }
00090     }

```

Here is the caller graph for this function:



5.6.3.12 void TX::store (std::shared_ptr< OSTM > object)

@157 store void, receive an [OSTM](#) type shared pointer object to store the changes with the transaction copy object

Parameters

<i>object</i>	std::shared_ptr<OSTM>, receiving a changed shared pointer, that was returned from the load function
---------------	---

Definition at line 157 of file [TX.cpp](#).

References [working_Map_collection](#).

```

00157     {

```

```

00158      /* @159 RUNTIME ERROR. Check for null pointer ! Null pointer can cause segmentation fault!!! */
00159      if(object == nullptr){
00160          throw std::runtime_error(std::string("[RUNTIME ERROR : NULL POINTER IN STORE FUNCTION]") );
00161      }
00162      /* @163 Declare and initialize Iterator for working_Map_collection */
00163      std::map< int, std::shared_ptr<OSTM> >::iterator working_Map_collection_Object_Shared_Pointer_Iterator;
00164      /* @165 Find copy object in working_Map_collection by the object unique ID*/
00165      working_Map_collection_Object_Shared_Pointer_Iterator =
      working_Map_collection.find(object->Get_Unique_ID());
00166      /* @167 If object found, then replace it */
00167      if (working_Map_collection_Object_Shared_Pointer_Iterator !=
      working_Map_collection.end()) {
00168          /* @169 Replace copy object in working_Map_collection associated with the unique ID key*/
00169          working_Map_collection_Object_Shared_Pointer_Iterator->second = object;
00170          /* @171 If error happens during store procees throw runtime error */
00171      } else { throw std::runtime_error(std::string("[RUNTIME ERROR : NO OBJECT FOUND STORE FUNCTION, CANNOT
      STORE OBJECT]") );}
00172 }

```

5.6.3.13 void TX::th_exit() [private]

@52 th_exit void, delete all std::shared_ptr<OSTM> elements from working_Map_collection, that store pointers to working objects

Clean up all associated values by the thread delete from working_Map_collection, it is an automated function by the transactions

Parameters

<i>working_Map_collection</i>	std::map, store std::shared_ptr<OSTM> transaction pointers
-------------------------------	--

Definition at line 52 of file TX.cpp.

References [_tx_nesting_level](#), and [working_Map_collection](#).

Referenced by [commit\(\)](#).

```

00052      {
00053      /* @54 If bigger than ZERO, means active nested transactions running in background, do not delete
      anything yet */
00054      if (this->_tx_nesting_level > 0) {
00055          /* Active nested transactions running in background, do not delete anything yet */
00056      } else {
00057          /* Remove all elements map entries from transaction and clear the map */
00058          working_Map_collection.clear();
00059      }
00060 }

```

Here is the caller graph for this function:



5.6.4 Friends And Related Function Documentation

5.6.4.1 friend class **TM** [friend]

Definition at line 74 of file [TX.h](#).

5.6.5 Member Data Documentation

5.6.5.1 int **TX::tx_nesting_level** [private]

`_tx_nesting_level`, store integer value represent the transaction nesting level

Definition at line 101 of file [TX.h](#).

Referenced by [_decrease_tx_nesting\(\)](#), [_increase_tx_nesting\(\)](#), [commit\(\)](#), [th_exit\(\)](#), and [TX\(\)](#).

5.6.5.2 std::map< int, std::shared_ptr< **OSTM** > > **TX::main_Process_Map_collection** [static], [private]

`main_Process_Map_collection`, STATIC GLOBAL MAP Collection to store **OSTM** parent based shared pointers to control/lock and compare objects version number within transactions

Definition at line 105 of file [TX.h](#).

Referenced by [_register\(\)](#), [_release_object_lock\(\)](#), [commit\(\)](#), and [ostm_exit\(\)](#).

5.6.5.3 std::map< pid_t, std::map< int, int > > **TX::process_map_collection** [static], [private]

`process_map_collection`, STATIC GLOBAL MAP Collection to store all process associated keys to find when deleting transactions

Definition at line 109 of file [TX.h](#).

Referenced by [_print_all_tx\(\)](#), [_register\(\)](#), and [ostm_exit\(\)](#).

5.6.5.4 std::mutex **TX::register_Lock** [static], [private]

`register_Lock`, std::mutex to control shared access on shared MAIN collection

Definition at line 117 of file [TX.h](#).

Referenced by [_register\(\)](#).

5.6.5.5 int **TX::test_counter** = 0 [static]

Definition at line 82 of file [TX.h](#).

Referenced by [getTest_counter\(\)](#).

5.6.5.6 `std::thread::id TX::transaction_Number` [private]

`transaction_Number`, Returning the transaction number what is a registered thread number associated with the transaction

Definition at line 97 of file [TX.h](#).

Referenced by [_get_tx_number\(\)](#), and [TX\(\)](#).

5.6.5.7 `std::map< int, std::shared_ptr<OSTM> > TX::working_Map_collection` [private]

`working_Map_collection`, Collection to store copy of [OSTM](#) parent based original Global shared pointers to make invisible changes during isolated transaction

Definition at line 93 of file [TX.h](#).

Referenced by [_print_all_tx\(\)](#), [_register\(\)](#), [_release_object_lock\(\)](#), [commit\(\)](#), [load\(\)](#), [store\(\)](#), and [th_exit\(\)](#).

The documentation for this class was generated from the following files:


- [TX.h](#)
- [TX.cpp](#)

6 File Documentation

6.1 AIB.cpp File Reference

```
#include <math.h>
#include "AIB.h"
```

Include dependency graph for AIB.cpp:

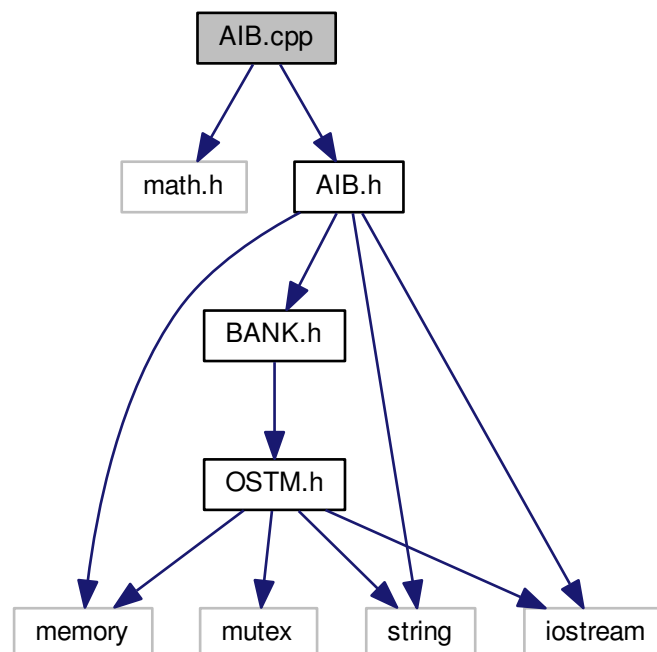

6.2 AIB.cpp


```

00001 /*
00002  * File:    AIB.cpp
00003  * Author:  Zoltan Fuzesi C00197361,
00004  * IT Carlow, Software Engineering,
00005  *
00006  * Supervisor : Joe Kehoe,
00007  *
00008  * C++ Software Transactional Memory,
00009  *
00010  * Created on December 18, 2017, 2:09 PM
00011  * OSTM base class function declarations.
00012  */
00013
00014 #include <math.h>
00015
00016 #include "AIB.h"
00017
00018
00019 AIB::~AIB() {
00020 }
00025 std::shared_ptr<OSTM> AIB::getBaseCopy(std::shared_ptr<OSTM> object)
00026 {
00028     std::shared_ptr<BANK> objTO = std::dynamic_pointer_cast<BANK>(object);
00030     std::shared_ptr<BANK> obj(new AIB(objTO, object->Get_Version(),object->Get_Unique_ID()));
00032     std::shared_ptr<OSTM> ostm_obj = std::dynamic_pointer_cast<OSTM>(obj);
00034     return ostm_obj;
00035 }
00041 void AIB::copy(std::shared_ptr<OSTM> to, std::shared_ptr<OSTM> from){
00042
00044     std::shared_ptr<AIB> objTO = std::dynamic_pointer_cast<AIB>(to);
00046     std::shared_ptr<AIB> objFROM = std::dynamic_pointer_cast<AIB>(from);
00048     objTO->Set_Unique_ID(objFROM->Get_Unique_ID());
00050     objTO->Set_Version(objFROM->Get_Version());
00052     objTO->SetAccountNumber(objFROM->GetAccountNumber());
00054     objTO->SetBalance(objFROM->GetBalance());
00055 }
00059 void AIB::toString()
00060 {
00061     std::cout << "\nAIB BANK" << "\nUnique ID : " << this->Get_Unique_ID() << "\nInt account : "
00062     << this->GetAccountNumber() << "\nDouble value : " << this->
00063     GetBalance() << "\nFirst name: " << this->GetFirstName() << "\nLast name : " <<
00064     this->GetLastName() << "\nVersion number : " << this->Get_Version() << std::endl;
00065 }
00066 void AIB::SetAddress(std::string address) {
00067     this->address = address;
00068 }
00072 std::string AIB::GetAddress() const {
00073     return address;
00074 }
00078 void AIB::SetBalance(double balance) {
00079     this->balance = balance;
00080 }
00084 double AIB::GetBalance() const {
00085     return balance;
00086 }
00090 void AIB::SetAccountNumber(int accountNumber) {
00091     this->accountNumber = accountNumber;
00092 }
00096 int AIB::GetAccountNumber() const {
00097     return accountNumber;
00098 }
00102 void AIB::SetLastName(std::string lastName) {
00103     this->lastName = lastName;
00104 }
00108 std::string AIB::GetLastName() const {
00109     return lastName;
00110 }
00114 void AIB::SetFirstName(std::string firstName) {
00115     this->firstName = firstName;
00116 }
00120 std::string AIB::GetFirstName() const {
00121     return firstName;
00122 }
00126 void AIB::SetFullname(std::string fullname) {
00127     this->fullname = fullname;
00128 }
00132 std::string AIB::GetFullname() const {
00133     return fullname;
00134 }


```

6.3 AIB.h File Reference

```
#include "BANK.h"  
#include <string>  
#include <memory>  
#include <iostream>  
Include dependency graph for AIB.h:
```

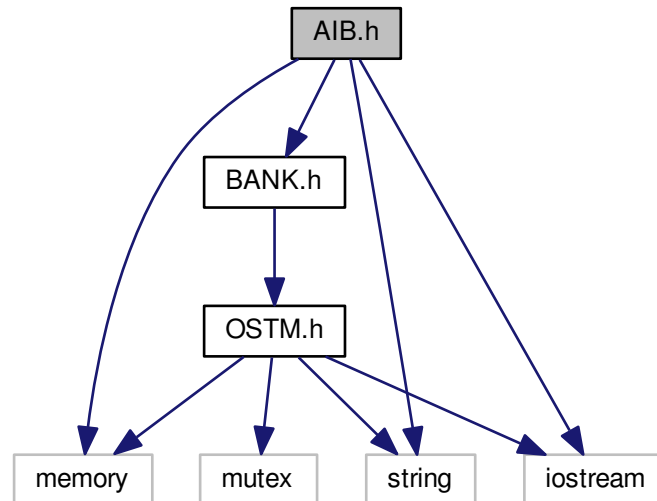

This graph shows which files directly or indirectly include this file:



Classes

- class [AIB](#)

6.4 AIB.h

```

00001 /*
00002  * File:    AIB.h
00003  * Author:  Zoltan Fuzesi C00197361,
00004  * IT Carlow, Software Engineering,
00005  *
00006  * Supervisor : Joe Kehoe,
00007  *
00008  * C++ Software Transactional Memory,
00009  *
00010  * Created on December 18, 2017, 2:09 PM
00011  * OSTM base class function declarations.
00012  */
00013
00014 #ifndef AIB_H
00015 #define AIB_H
00016 #include "BANK.h"
00017 #include <string>
00018 #include <memory>
00019 #include <iostream>
00023 class AIB : public BANK {
00024 public:
00028     AIB(): BANK()
00029     {
00030         this->accountNumber = 0;
00031         this->balance = 50;
00032         this->firstName = "Joe";
00033         this->lastName = "Blog";
00034         this->address = "High street, Carlow";
00035         this->fullname = firstName + " " + lastName;
00036     };
00037
00046     AIB(int accountNumber, double balance, std::string
firstName, std::string lastName, std::string address):
BANK()
00047     {
00048         this->accountNumber = accountNumber;
00049         this->balance = balance;
00050         this->firstName = firstName;
00051         this->lastName = lastName;
00052         this->address = address;
00053         this->fullname = firstName + " " + lastName;
00054     };
00061     AIB(std::shared_ptr<BANK> obj, int _version, int _unique_id): BANK(_version, _unique_id)
00062     {
00063         this->accountNumber = obj->GetAccountNumber();
00064         this->balance = obj->GetBalance();
00065         this->firstName = obj->GetFirstName();
00066         this->lastName = obj->GetLastName();
00067         this->address = obj->GetAddress();
00068         this->fullname = obj->GetFirstName() + " " + obj->GetLastName();
00069     };
00074     AIB(const AIB& orig);
00078     AIB operator=(const AIB& orig){};
00082     virtual ~AIB();
00083
00087     virtual void copy(std::shared_ptr<OSTM> to, std::shared_ptr<OSTM> from);
00088     virtual std::shared_ptr<OSTM> getBaseCopy(std::shared_ptr<OSTM> object);
00089     virtual void toString();
00090
00091     /*
00092     * Implement BANK virtual methods
00093     */
00094     virtual void SetAddress(std::string address);
00095     virtual std::string GetAddress() const;
00096     virtual void SetBalance(double balance);
00097     virtual double GetBalance() const;
00098     virtual void SetAccountNumber(int accountNumber);
00099     virtual int GetAccountNumber() const;
00100     virtual void SetLastName(std::string lastName);
00101     virtual std::string GetLastName() const;
00102     virtual void SetFirstName(std::string firstName);
00103     virtual std::string GetFirstName() const;
00104     virtual void SetFullname(std::string fullname);
00105     virtual std::string GetFullname() const;
00106
00107 private:
00111     std::string fullname;
00115     std::string firstName;
00119     std::string lastName;
00123     int accountNumber;
00127     double balance;
00131     std::string address;
00132 };

```




```
00133
00134 #endif /* AIB_H */
```

6.5 BANK.cpp File Reference

```
#include "BANK.h"
```

Include dependency graph for BANK.cpp:

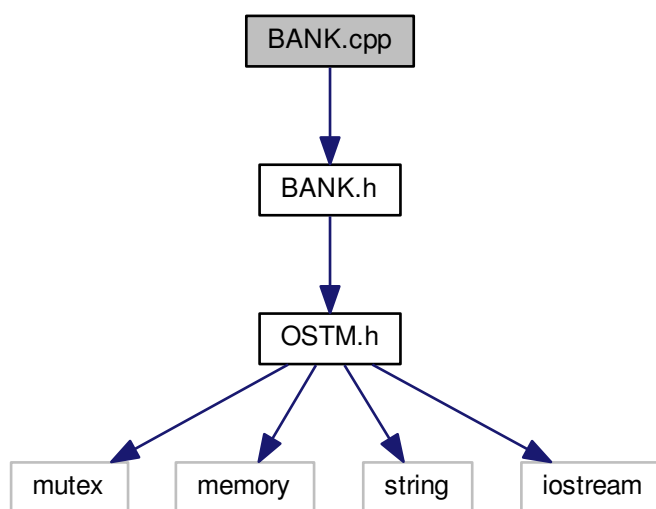


6.6 BANK.cpp

```
00001 /*
00002  * File:   BANK.cpp
00003  * Author: Zoltan Fuzesi C00197361,
00004  * IT Carlow, Software Engineering,
00005  *
00006  * Supervisor : Joe Kehoe,
00007  *
00008  * C++ Software Transactional Memory,
00009  *
00010  * Created on December 18, 2017, 2:09 PM
00011  * OSTM base class function declarations.
00012  */
00013
00014 #include "BANK.h"
00015
00016 BANK::BANK(const BANK& orig) {
00017 }
00018
00019 BANK::~BANK() {
00020 }
00021
```


6.7 BANK.h File Reference

```
#include "OSTM.h"
```

Include dependency graph for BANK.h:

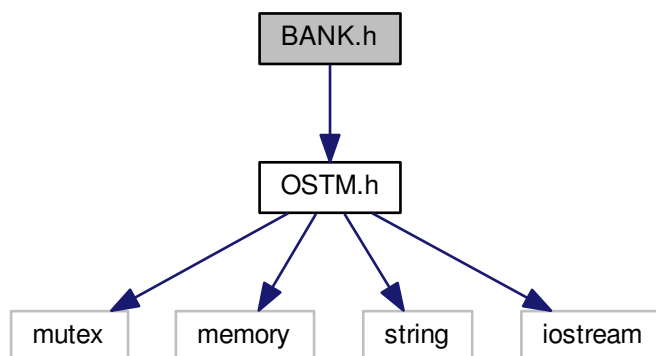

This graph shows which files directly or indirectly include this file:

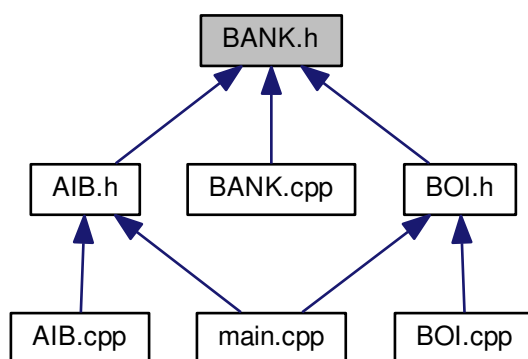

Classes

- class [BANK](#)

6.8 BANK.h

```
00001 /*  
00002  * File:   BANK.h
```

```


00003  * Author: Zoltan Fuzesi C00197361,
00004  * IT Carlow, Software Engineering,
00005  *
00006  * Supervisor : Joe Kehoe,
00007  *
00008  * C++ Software Transactional Memory,
00009  *
00010  * Created on December 18, 2017, 2:09 PM
00011  * OSTM base class function declarations.
00012  */
00013
00014 #ifndef BANK_H
00015 #define BANK_H
00016 #include "OSTM.h"
00021 class BANK : public OSTM {
00022
00023
00024 public:
00028     BANK(): OSTM(){
00029
00030     };
00034     BANK(int _version, int _unique_id) : OSTM(_version, _unique_id){};
00038     BANK(const BANK& orig);
00042     virtual ~BANK();
00043
00047     virtual void SetAddress(std::string address){};
00048     virtual std::string GetAddress() const{};
00049     virtual void SetBalance(double balance){};
00050     virtual double GetBalance() const{};
00051     virtual void SetAccountNumber(int accountNumber){};
00052     virtual int GetAccountNumber() const{};
00053     virtual void SetLastName(std::string lastName){};
00054     virtual std::string GetLastName() const{};
00055     virtual void SetFirstName(std::string firstName){};
00056     virtual std::string GetFirstName() const{};
00057     virtual void SetFullname(std::string fullname){};
00058     virtual std::string GetFullname() const{};
00059
00060 private:
00061
00062 };
00063
00064 #endif /* BANK_H */
00065

```

6.9 BOI.cpp File Reference

```
#include "BOI.h"
```

Include dependency graph for BOI.cpp:

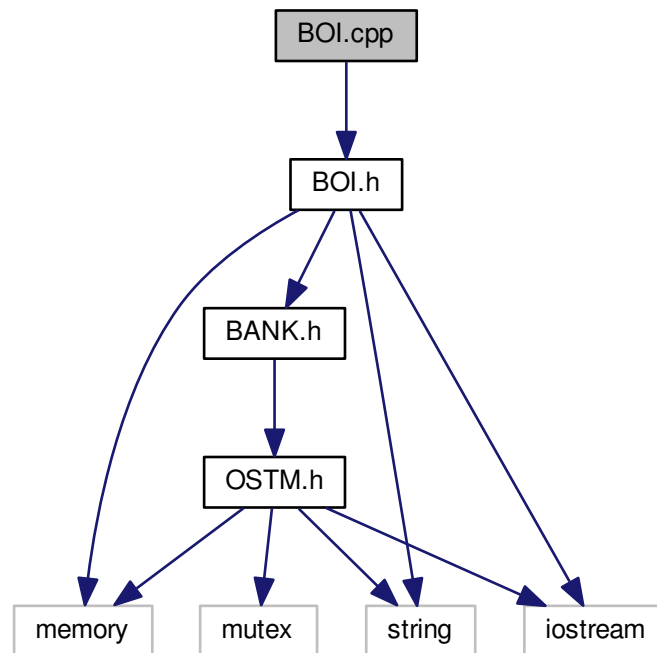

6.10 BOI.cpp

```

00001
00002 /*
00003  * File:   BOI.cpp
00004  * Author: Zoltan Fuzesi C00197361,
00005  * IT Carlow, Software Engineering,
00006  *
00007  * Supervisor : Joe Kehoe,
00008  *
00009  * C++ Software Transactional Memory,
00010  *
00011  * Created on December 18, 2017, 2:09 PM
00012  * OSTM base class function declarations.
00013  */
00014
00015 #include "BOI.h"
00016
00017 BOI::~BOI() {
00018 }
00019
00020 BOI::BOI(const BOI& orig) {
00021 }
00026 std::shared_ptr<OSTM> BOI::getBaseCopy(std::shared_ptr<OSTM> object)
00027 {
00029     std::shared_ptr<BOI> objTO = std::dynamic_pointer_cast<BOI>(object);
00031     std::shared_ptr<BOI> obj(new BOI(objTO,object->Get_Version(),object->Get_Unique_ID()));
00033     std::shared_ptr<OSTM> ostm_obj = std::dynamic_pointer_cast<OSTM>(obj);
00035     return ostm_obj;
00036 }
00042 void BOI::copy(std::shared_ptr<OSTM> to, std::shared_ptr<OSTM> from){
00044     std::shared_ptr<BOI> objTO = std::dynamic_pointer_cast<BOI>(to);
00046     std::shared_ptr<BOI> objFROM = std::dynamic_pointer_cast<BOI>(from);
00048     objTO->Set_Unique_ID(objFROM->Get_Unique_ID());
00050     objTO->Set_Version(objFROM->Get_Version());
00052     objTO->SetAccountNumber(objFROM->GetAccountNumber());
00054     objTO->SetBalance(objFROM->GetBalance());
  
```

```

00055 }
00059 void BOI::toString()
00060 {
00061     std::cout << "\nBOI BANK" << "\nUnique ID : " << this->Get_Unique_ID() << "\nInt account :
    " << this->GetAccountNumber() << "\nDouble value : " << this->
    GetBalance() << "\nFirst name: " << this->GetFirstName() << "\nLast name : " <<
    this->GetLastName() << "\nVersion number : " << this->Get_Version() << std::endl;
00062 }
00066 void BOI::SetAddress(std::string address) {
00067     this->address = address;
00068 }
00072 std::string BOI::GetAddress() const {
00073     return address;
00074 }
00078 void BOI::SetBalance(double balance) {
00079     this->balance = balance;
00080 }
00084 double BOI::GetBalance() const {
00085     return balance;
00086 }
00090 void BOI::SetAccountNumber(int accountNumber) {
00091     this->accountNumber = accountNumber;
00092 }
00096 int BOI::GetAccountNumber() const {
00097     return accountNumber;
00098 }
00102 void BOI::SetLastName(std::string lastName) {
00103     this->lastName = lastName;
00104 }
00108 std::string BOI::GetLastName() const {
00109     return lastName;
00110 }
00114 void BOI::SetFirstName(std::string firstName) {
00115     this->firstName = firstName;
00116 }
00120 std::string BOI::GetFirstName() const {
00121     return firstName;
00122 }
00126 void BOI::SetFullname(std::string fullname) {
00127     this->fullname = fullname;
00128 }
00132 std::string BOI::GetFullname() const {
00133     return fullname;
00134 }
00135

```


6.11 BOI.h File Reference

```


#include "BANK.h"
#include <string>
#include <memory>
#include <iostream>

```

Include dependency graph for BOI.h:

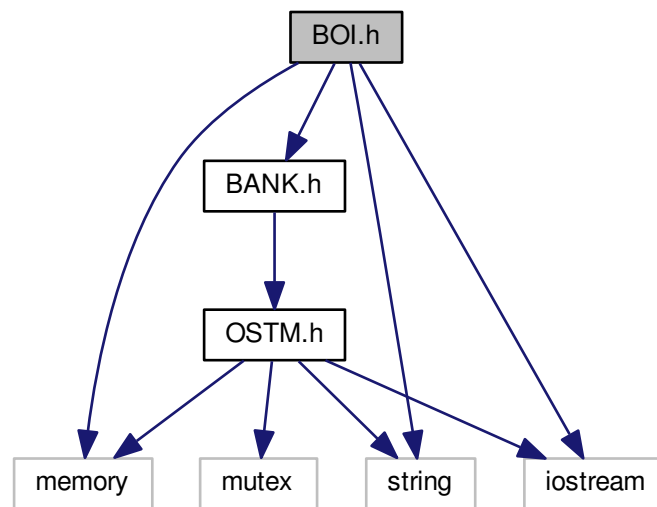

This graph shows which files directly or indirectly include this file:



Classes

- class [BOI](#)

6.12 BOI.h

```

00001
00002 /*
00003  * File:   BOI.h
00004  * Author: Zoltan Fuzesi C00197361,
00005  * IT Carlow, Software Engineering,
00006  *
00007  * Supervisor : Joe Kehoe,

```

```


00008  *
00009  * C++ Software Transactional Memory,
00010  *
00011  * Created on December 18, 2017, 2:09 PM
00012  * OSTM base class function declarations.
00013  */
00014
00015 #ifndef BOI_H
00016 #define BOI_H
00017 #include "BANK.h"
00018 #include <string>
00019 #include <memory>
00020 #include <iostream>
00024 class BOI: public BANK {
00025 public:
00029     BOI(): BANK()
00030     {
00031         this->accountNumber = 0;
00032         this->balance = 50;
00033         this->firstName = "Joe";
00034         this->lastName = "Blog";
00035         this->address = "High street, Carlow";
00036         this->fullname = firstName + " " + lastName;
00037     }
00038
00047     BOI(int accountNumber, double balance, std::string
firstName, std::string lastName, std::string address):
BANK()
00048     {
00049         this->accountNumber = accountNumber;
00050         this->balance = balance;
00051         this->firstName = firstName;
00052         this->lastName = lastName;
00053         this->address = address;
00054         this->fullname = firstName + " " + lastName;
00055     };
00062     BOI(std::shared_ptr<BOI> obj, int _version, int _unique_id): BANK(_version, _unique_id)
00063     {
00064         this->accountNumber = obj->GetAccountNumber();
00065         this->balance = obj->GetBalance();
00066         this->firstName = obj->GetFirstName();
00067         this->lastName = obj->GetLastName();
00068         this->address = obj->GetAddress();
00069         this->fullname = obj->GetFirstName() + " " + obj->GetLastName();
00070     };
00074     BOI(const BOI& orig);
00078     BOI operator=(const BOI& orig){};
00082     virtual ~BOI();
00083
00084     /*
00085     * Implement OSTM virtual methods
00086     */
00087     virtual std::shared_ptr<OSTM> getBaseCopy(std::shared_ptr<OSTM> object);
00088     virtual void copy(std::shared_ptr<OSTM> to, std::shared_ptr<OSTM> from);
00089     virtual void toString();
00090
00091     /*
00092     * Implement BANK virtual methods
00093     */
00094     virtual void SetAddress(std::string address);
00095     virtual std::string GetAddress() const;
00096     virtual void SetBalance(double balance);
00097     virtual double GetBalance() const;
00098     virtual void SetAccountNumber(int accountNumber);
00099     virtual int GetAccountNumber() const;
00100     virtual void SetLastName(std::string lastName);
00101     virtual std::string GetLastName() const;
00102     virtual void SetFirstName(std::string firstName);
00103     virtual std::string GetFirstName() const;
00104     virtual void SetFullname(std::string fullname);
00105     virtual std::string GetFullname() const;
00106
00107 private:
00111     std::string fullname;
00115     std::string firstName;
00119     std::string lastName;
00123     int accountNumber;
00127     double balance;
00131     std::string address;
00132
00133 };
00134
00135 #endif /* BOI_H */

```

6.13 main.cpp File Reference

```
#include <cstdlib>
#include <iostream>
#include <thread>
#include "TM.h"
#include "AIB.h"
#include "BOI.h"
#include <mutex>
#include <memory>
#include <condition_variable>
#include <vector>
```

Include dependency graph for main.cpp:

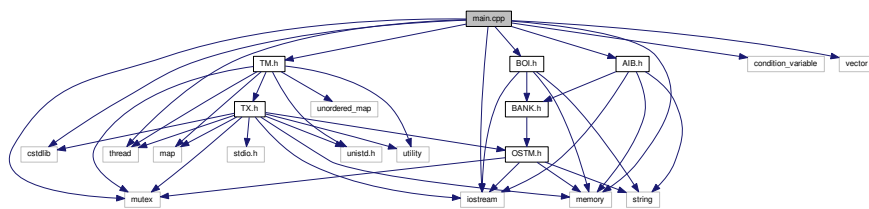

Functions

- void `_nesting_` (std::shared_ptr< [OSTM](#) > `_to_`, std::shared_ptr< [OSTM](#) > `_from_`, [TM](#) & `_tm`, double `_amount`)
nesting function, takes two std::shared_ptr<OSTM> pointer, the Transaction manager, and the amount to use in the transaction and transfer the _amount value from one account to the another account This function create nested transactions inside the transaction, and call other function to nesting the transaction as well
- void `_two_account_transfer_` (std::shared_ptr< [OSTM](#) > `_to_`, std::shared_ptr< [OSTM](#) > `_from_`, [TM](#) & `_tm`, double `_amount`)
two_account_transfer function, takes two [OSTM](#) type shared pointer, the Transaction manager, and the amount to use in the transaction
- int [main](#) (void)

6.13.1 Function Documentation

6.13.1.1 void _nesting_ (std::shared_ptr< [OSTM](#) > `_to_`, std::shared_ptr< [OSTM](#) > `_from_`, [TM](#) & `_tm`, double `_amount`)

nesting function, takes two std::shared_ptr<OSTM> pointer, the Transaction manager, and the amount to use in the transaction and transfer the _amount value from one account to the another account This function create nested transactions inside the transaction, and call other function to nesting the transaction as well

Parameters

<code>_tm</code>	TM , transaction Manager
<code>_to</code>	std::shared_ptr< BANK >
<code>_from</code>	std::shared_ptr< OSTM >
<code>_amount</code>	double value

Definition at line 77 of file [main.cpp](#).

References [TM::get_tx\(\)](#), [_two_account_transfer_\(\)](#), and [BANK::SetBalance\(\)](#).


Referenced by [main\(\)](#).

```

00077
00078                                     {
00079     /* @79 Request fro transaction object with the transaction manager*/
00080     std::shared_ptr<TX> tx = _tm._get_tx();
00081     /* @81-82 Register the two OSTM type shared pointer to the library : _to_ and _from_ */
00082     tx->_register(_to_);
00083     tx->_register(_from_);
00084     /* @84-85 We need to create local pointers to use the temporary pointers in the transaction */
00085     std::shared_ptr<BANK> _TO_BANK_, _FROM_BANK_;
00086     std::shared_ptr<OSTM> _TO_OSTM_, _FROM_OSTM_;
00087     /* @87 Declare boolean variable to control the transaction with the while loop*/
00088     bool done = false;
00089     /* @89 Use try catch blocks ! If you try to use exidantly any nullpointer to register,save or load in
the library, then the library wil throw a runtime execption*/
00090     try {
00091         /* @91 Declare the WHILE loop with the boolean variable */
00092         while (!done) {
00093             /* @93-94 Retrieve the copy OSTM type pointers you registered (_to_ and _from_) from the
library, and cast it back to BANK type. In this way you can used the BANK virtual methods to access the AIB and
BOI objects values*/
00094             _TO_BANK_ = std::dynamic_pointer_cast<BANK> (tx->load(_to_));
00095             _FROM_BANK_ = std::dynamic_pointer_cast<BANK> (tx->load(_from_));
00096             /* @97-98 make changes with the local pointers */
00097             _TO_BANK_->SetBalance(_TO_BANK_->GetBalance() + _amount);
00098             _FROM_BANK_->SetBalance(_FROM_BANK_->GetBalance() - _amount);
00099             /* @100-101 Cast back the BANK type pointers to OSTM type before try to store the changes with
the objetcs */
00100             _TO_OSTM_ = std::dynamic_pointer_cast<OSTM> (_TO_BANK_);
00101             _FROM_OSTM_ = std::dynamic_pointer_cast<OSTM> (_FROM_BANK_);
00102             /* @103-104 Store changes has made with the local pointers */
00103             tx->store(_TO_OSTM_);
00104             tx->store(_FROM_OSTM_);
00105
00106             /* @107 Retrieve a Transaction object to used in the NESTED TRANSACTION. Because the same
thread request the transaction object the transaction manager will return back the same transaction object, and
increase the nesting associated with the transaction */
00107             std::shared_ptr<TX> txTwo = _tm._get_tx();
00108             /* @109 Declare boolean variable to control the nested transaction with the while loop*/
00109             bool nestedDone = false;
00110             /* @111 Declare the WHILE loop with the boolean variable */
00111             while (!nestedDone) {
00112
00113                 /* @114-115Retrieve the copy OSTM type pointers you registered (_to_ and _from_) from the
library, and cast it back to BANK type. In this way you can used the BANK virtual methods to access the AIB
and BOI objects values*/
00114                 _TO_BANK_ = std::dynamic_pointer_cast<BANK> (txTwo->load(_to_));
00115                 _FROM_BANK_ = std::dynamic_pointer_cast<BANK> (txTwo->load(_from_));
00116                 /* @117-118 make changes with the local pointers */
00117                 _TO_BANK_->SetBalance(_TO_BANK_->GetBalance() + _amount);
00118                 _FROM_BANK_->SetBalance(_FROM_BANK_->GetBalance() - _amount);
00119                 /* @120-121 Cast back the BANK type pointers to OSTM type before try to store the changes
with the objetcs */
00120                 _TO_OSTM_ = std::dynamic_pointer_cast<OSTM> (_TO_BANK_);
00121                 _FROM_OSTM_ = std::dynamic_pointer_cast<OSTM> (_FROM_BANK_);
00122                 /* @123-124 Store changes has made with the local pointers */
00123                 txTwo->store(_TO_OSTM_);
00124                 txTwo->store(_FROM_OSTM_);
00125                 /* @126 Call other function that will nesting the transaction to the next level */
00126                 _two_account_transfer_(_to_, _from_, _tm, _amount);
00127                 /* @128 Commit changes with the nested transaction*/
00128                 nestedDone = txTwo->commit();
00129             }
00130             /* @131 Commit changes with the outer transaction*/
00131             done = tx->commit();
00132         }
00133         /* @134-135 Catch block to catch runtime errors. Print error to console*/
00134     } catch (std::runtime_error& e) {
00135         std::cout << e.what() << std::endl;
00136     }
00137 }

```

Here is the call graph for this function:



Here is the caller graph for this function:



6.13.1.2 void `_two_account_transfer_` (std::shared_ptr< OSTM > `_to_`, std::shared_ptr< OSTM > `_from_`, TM & `_tm`, double `_amount`)

`two_account_transfer` function, takes two [OSTM](#) type shared pointer, the Transaction manager, and the amount to use in the transaction

Parameters

<code>_tm</code>	TM, transaction Manager
<code>_to</code>	std::shared_ptr<BANK>
<code>_from</code>	std::shared_ptr<OSTM>
<code>_amount</code>	double value

Definition at line 32 of file [main.cpp](#).

References [TM::_get_tx\(\)](#), and [BANK::SetBalance\(\)](#).

Referenced by [_nesting_\(\)](#), and [main\(\)](#).

```

00032 {
00033     /* @34 Request for transaction object with the transaction manager*/
00034     std::shared_ptr<TX> tx = _tm._get_tx();
00035     /* @36-37 Register the two OSTM type shared pointer to the library : _to_ and _from_ */
00036     tx->_register(_to_);
00037     tx->_register(_from_);
00038     /* @39-40 We need to create local pointers to use the temporary pointers in the transaction */
00039     std::shared_ptr<BANK> _TO_BANK_, _FROM_BANK_;
00040     std::shared_ptr<OSTM> _TO_OSTM_, _FROM_OSTM_;
00041     /* @42 Declare boolean variable to control the transaction with the while loop*/
00042     bool done = false;
00043     /* @44 Use try catch blocks ! If you try to use exidantly any nullpointer to register,save or load in
the library, then the library wil throw a runtime exeception*/
00044     try {
00045         /* @46 Declare the WHILE loop with the boolean variable */
00046         while (!done) {


```

```


00047      /* @48-49 Retrieve the copy OSTM type pointers you registered (_to_ and _from_) from the
library, and cast it back to BANK type. In this way you can used the BANK virtual methods to access the AIB and
BOI objects values*/
00048      _TO_BANK_ = std::dynamic_pointer_cast<BANK> (tx->load(_to_));
00049      _FROM_BANK_ = std::dynamic_pointer_cast<BANK> (tx->load(_from_));
00050
00051      /* @52-53 Makes changes with the local pointers. Remove value from the first object and add to
the second object ! TRANSFER ! */
00052      _TO_BANK_->SetBalance(_TO_BANK_->GetBalance() + _amount);
00053      _FROM_BANK_->SetBalance(_FROM_BANK_->GetBalance() - _amount);
00054      /* @55-56 Cast back the BANK type pointers to OSTM type before try to store the changes with
the objetcs */
00055      _TO_OSTM_ = std::dynamic_pointer_cast<OSTM> (_TO_BANK_);
00056      _FROM_OSTM_ = std::dynamic_pointer_cast<OSTM> (_FROM_BANK_);
00057      /* @58-59 Store changes has made with the local pointers */
00058      tx->store(_TO_OSTM_);
00059      tx->store(_FROM_OSTM_);
00060      /* @62 Commit changes with the nested transaction*/
00061      done = tx->commit();
00062  }
00063  /* @64-65 Catch block to catch runtime errors. Print error to console*/
00064  } catch (std::runtime_error& e) {
00065      std::cout << e.what() << std::endl;
00066  }
00067  }

```

Here is the call graph for this function:



Here is the caller graph for this function:



6.13.1.3 int main (void)

@162 threadArraySize control number of threads will be created in the main function

Definition at line 142 of file main.cpp.

References [TM::get_tx\(\)](#), [_nesting_\(\)](#), [_two_account_transfer_\(\)](#), [TM::TX_EXIT\(\)](#), [TM::Instance\(\)](#), and [TM::print_all\(\)](#).

```

00142      {
00143
00144      /* @146 Get the Transaction Manager */
00145
00146      TM& tm = TM::Instance();


```

```

00147
00148     /* @151-152 Create BANK object OSTM type. All object will get the unique ID generated by default*/
00149
00150     std::shared_ptr<OSTM> aib_ptr(new AIB(100, 500, "Joe", "Blog", "High street, Kilkenny, Co.Kilkenny")
00151 );
00152     std::shared_ptr<OSTM> boi_ptr(new BOI(200, 500, "Mark", "darcy", "Main street, CARlow, Co.Carlow"));
00153
00154     /* @155-156 Display BANK objects before transaction*/
00155     aib_ptr->toString();
00156     boi_ptr->toString();
00157
00158
00159     /* @160 transferAmount in the transaction, control the value in the transaction between objetcs*/
00160     int transferAmount = 1;
00161     int threadArraySize = 300;
00162     /* @164 Create a thread array with the threadArraySize declared before */
00163     std::thread thArray[threadArraySize];
00164     /* @166 Creating the threads with the loop */
00165     for (int i = 0; i < threadArraySize; ++i) {
00166         /* @168 with the new thread created call the function _nesting_*/
00167         thArray[i] = std::thread(_nesting_, aib_ptr, boi_ptr, std::ref(tm), transferAmount);
00168         /* @170 with the new thread created call the function _two_account_transfer_*/
00169         thArray[i] = std::thread(_two_account_transfer_, aib_ptr, boi_ptr,
00170 std::ref(tm), transferAmount);
00171     }
00172     /* @173-175 Join all the threads created */
00173     for (int i = 0; i < threadArraySize; ++i) {
00174         thArray[i].join();
00175     }
00176
00177     /* @178-179 Display objects after all transactions are finished */
00178     aib_ptr->toString();
00179     boi_ptr->toString();
00180
00181     /* @182 For testing purpose create a new transaction object to print out the rollback counter */
00182     std::shared_ptr<TX> tx = tm._get_tx();
00183
00184     /* @185 Display the rollback number from the transaction class*/
00185     std::cout << "Rollback counter is : " << tx->getTest_counter() << std::endl;
00186
00187     /* @188 Clean up Transaction Manager from all main process associated transactions */
00188     tm._TX_EXIT();
00189     /* @190 Display all Transactions associated with the main process. It should be empty after _TX_EXIT()
00190 function call!!! */
00191     tm.print_all();
00192
00193     return 0;
00194 }

```

Here is the call graph for this function:

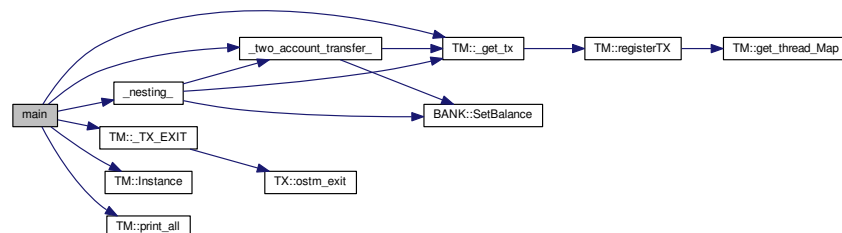

6.14 main.cpp

```

00001 /*
00002  * File:   main.cpp
00003  * Author: Zoltan Fuzesi C00197361,
00004  * IT Carlow, Software Engineering,
00005  *
00006  * Supervisor : Joe Kehoe,
00007  *
00008  * C++ Software Transactional Memory,

```

```

00009  *
00010  * Created on December 18, 2017, 2:09 PM
00011  * OSTM base class function declarations.
00012  */
00013
00014 #include <cstdlib>
00015 #include <iostream>
00016 #include <thread>
00017 #include "TM.h"
00018 #include "AIB.h"
00019 #include "BOI.h"
00020 #include <mutex>
00021 #include <memory>
00022 #include <condition_variable>
00023 #include <vector>
00024
00032 void _two_account_transfer(std::shared_ptr<OSTM> _to_, std::shared_ptr<OSTM> _from_,
    TM& _tm, double _amount) {
00033     /* @34 Request for transaction object with the transaction manager*/
00034     std::shared_ptr<TX> tx = _tm._get_tx();
00035     /* @36-37 Register the two OSTM type shared pointer to the library : _to_ and _from_ */
00036     tx->_register(_to_);
00037     tx->_register(_from_);
00038     /* @39-40 We need to create local pointers to use the temporary pointers in the transaction */
00039     std::shared_ptr<BANK> _TO_BANK_, _FROM_BANK_;
00040     std::shared_ptr<OSTM> _TO_OSTM_, _FROM_OSTM_;
00041     /* @42 Declare boolean variable to control the transaction with the while loop*/
00042     bool done = false;
00043     /* @44 Use try catch blocks ! If you try to use exidantly any nullpointer to register,save or load in
the library, then the library wil throw a runtime execption*/
00044     try {
00045         /* @46 Declare the WHILE loop with the boolean variable */
00046         while (!done) {
00047             /* @48-49 Retrieve the copy OSTM type pointers you registered (_to_ and _from_) from the
library, and cast it back to BANK type. In this way you can used the BANK virtual methods to access the AIB and
BOI objects values*/
00048             _TO_BANK_ = std::dynamic_pointer_cast<BANK> (tx->load(_to_));
00049             _FROM_BANK_ = std::dynamic_pointer_cast<BANK> (tx->load(_from_));
00050
00051             /* @52-53 Makes changes with the local pointers. Remove value from the first object and add to
the second object ! TRANSFER ! */
00052             _TO_BANK_->SetBalance(_TO_BANK_->GetBalance() + _amount);
00053             _FROM_BANK_->SetBalance(_FROM_BANK_->GetBalance() - _amount);
00054             /* @55-56 Cast back the BANK type pointers to OSTM type before try to store the changes with
the objetcs */
00055             _TO_OSTM_ = std::dynamic_pointer_cast<OSTM> (_TO_BANK_);
00056             _FROM_OSTM_ = std::dynamic_pointer_cast<OSTM> (_FROM_BANK_);
00057             /* @58-59 Store changes has made with the local pointers */
00058             tx->store(_TO_OSTM_);
00059             tx->store(_FROM_OSTM_);
00060             /* @62 Commit changes with the nested transaction*/
00061             done = tx->commit();
00062         }
00063         /* @64-65 Catch block to catch runtime errors. Print error to console*/
00064     } catch (std::runtime_error& e) {
00065         std::cout << e.what() << std::endl;
00066     }
00067 }
00068
00077 void _nesting_(std::shared_ptr<OSTM> _to_, std::shared_ptr<OSTM> _from_,
    TM& _tm, double _amount) {
00078     /* @79 Request fro transaction object with the transaction manager*/
00079     std::shared_ptr<TX> tx = _tm._get_tx();
00080     /* @81-82 Register the two OSTM type shared pointer to the library : _to_ and _from_ */
00081     tx->_register(_to_);
00082     tx->_register(_from_);
00083     /* @84-85 We need to create local pointers to use the temporary pointers in the transaction */
00084     std::shared_ptr<BANK> _TO_BANK_, _FROM_BANK_;
00085     std::shared_ptr<OSTM> _TO_OSTM_, _FROM_OSTM_;
00086     /* @87 Declare boolean variable to control the transaction with the while loop*/
00087     bool done = false;
00088     /* @89 Use try catch blocks ! If you try to use exidantly any nullpointer to register,save or load in
the library, then the library wil throw a runtime execption*/
00089     try {
00090         /* @91 Declare the WHILE loop with the boolean variable */
00091         while (!done) {
00092             /* @93-94 Retrieve the copy OSTM type pointers you registered (_to_ and _from_) from the
library, and cast it back to BANK type. In this way you can used the BANK virtual methods to access the AIB and
BOI objects values*/
00093             _TO_BANK_ = std::dynamic_pointer_cast<BANK> (tx->load(_to_));
00094             _FROM_BANK_ = std::dynamic_pointer_cast<BANK> (tx->load(_from_));
00095
00096             /* @97-98 make changes with the local pointers */
00097             _TO_BANK_->SetBalance(_TO_BANK_->GetBalance() + _amount);
00098             _FROM_BANK_->SetBalance(_FROM_BANK_->GetBalance() - _amount);
00099             /* @100-101 Cast back the BANK type pointers to OSTM type before try to store the changes with
the objetcs */

```

```

00100         _TO_OSTM_ = std::dynamic_pointer_cast<OSTM> (_TO_BANK_);
00101         _FROM_OSTM_ = std::dynamic_pointer_cast<OSTM> (_FROM_BANK_);
00102         /* @103-104 Store changes has made with the local pointers */
00103         tx->store(_TO_OSTM_);
00104         tx->store(_FROM_OSTM_);
00105
00106         /* @107 Retrieve a Transaction object to used in the NESTED TRANSACTION. Because the same
thread request the transaction object the transaction manager will return back the same transaction object, and
increase the nesting associated with the transaction */
00107         std::shared_ptr<TX> txTwo = _tm._get_tx();
00108         /* @109 Declare boolean variable to control the nested transaction with the while loop*/
00109         bool nestedDone = false;
00110         /* @111 Declare the WHILE loop with the boolean variable */
00111         while (!nestedDone) {
00112
00113             /* @114-115Retrieve the copy OSTM type pointers you registered (_to_ and _from_) from the
library, and cast it back to BANK type. In this way you can used the BANK virtual methods to access the AIB
and BOI objects values*/
00114             _TO_BANK_ = std::dynamic_pointer_cast<BANK> (txTwo->load(_to_));
00115             _FROM_BANK_ = std::dynamic_pointer_cast<BANK> (txTwo->load(_from_));
00116             /* @117-118 make changes with the local pointers */
00117             _TO_BANK_->SetBalance(_TO_BANK_->GetBalance() + _amount);
00118             _FROM_BANK_->SetBalance(_FROM_BANK_->GetBalance() - _amount);
00119             /* @120-121 Cast back the BANK type pointers to OSTM type before try to store the changes
with the objetcs */
00120             _TO_OSTM_ = std::dynamic_pointer_cast<OSTM> (_TO_BANK_);
00121             _FROM_OSTM_ = std::dynamic_pointer_cast<OSTM> (_FROM_BANK_);
00122             /* @123-124 Store changes has made with the local pointers */
00123             txTwo->store(_TO_OSTM_);
00124             txTwo->store(_FROM_OSTM_);
00125             /* @126 Call other function that will nesting the transaction to the next level */
00126             _two_account_transfer_(_to_, _from_, _tm, _amount);
00127             /* @128 Commit changes with the nested transaction*/
00128             nestedDone = txTwo->commit();
00129         }
00130         /* @131 Commit changes with the outer transaction*/
00131         done = tx->commit();
00132     }
00133     /* @134-135 Catch block to catch runtime errors. Print error to console*/
00134     } catch (std::runtime_error& e) {
00135         std::cout << e.what() << std::endl;
00136     }
00137 }
00138
00142 int main(void) {
00143
00144     /* @146 Get the Transaction Manager */
00145
00146     TM& tm = TM::Instance();
00147
00148     /* @151-152 Create BANK object OSTM type. All object will get the unique ID generated by default*/
00149
00150     std::shared_ptr<OSTM> aib_ptr(new AIB(100, 500, "Joe", "Blog", "High street, Kilkenny, Co.Kilkenny"));
00151     std::shared_ptr<OSTM> boi_ptr(new BOI(200, 500, "Mark", "darcy", "Main street, CARlow, Co.Carlow"));
00152
00153
00154     /* @155-156 Display BANK objects before transaction*/
00155     aib_ptr->toString();
00156     boi_ptr->toString();
00157
00158
00159     /* @160 transferAmount in the transaction, control the value in the transaction between objetcs*/
00160     int transferAmount = 1;
00161     int threadArraySize = 300;
00162     /* @164 Create a thread array with the threadArraySize declared before */
00163     std::thread thArray[threadArraySize];
00164     /* @166 Creating the threads with the loop */
00165     for (int i = 0; i < threadArraySize; ++i) {
00166         /* @168 with the new thread created call the function _nesting_*/
00167         thArray[i] = std::thread(_nesting_, aib_ptr, boi_ptr, std::ref(tm), transferAmount);
00168         /* @170 with the new thread created call the function _two_account_transfer_*/
00169         thArray[i] = std::thread(_two_account_transfer_, aib_ptr, boi_ptr,
std::ref(tm), transferAmount);
00170     }
00171     /* @173-175 Join all the threads created */
00172     for (int i = 0; i < threadArraySize; ++i) {
00173         thArray[i].join();
00174     }
00175
00176
00177     /* @178-179 Display objects after all transactions are finished */
00178     aib_ptr->toString();
00179     boi_ptr->toString();
00180
00181     /* @182 For testing purpose create a new transaction object to print out the rollback counter */
00182     std::shared_ptr<TX> tx = tm._get_tx();
00183

```

```


00184      /* @185 Display the rollback number from the transaction class*/
00185      std::cout << "Rollback counter is : " << tx->getTest_counter() << std::endl;
00186
00187      /* @188 Clean up Transaction Manager from all main process associated transactions */
00188      tm._TX_EXIT();
00189      /* @190 Display all Transactions associated with the main process. It should be empty after _TX_EXIT()
function call!!! */
00190      tm.print_all();
00191
00192      return 0;
00193 }

```

6.15 OSTM.cpp File Reference

```
#include "OSTM.h"
```

Include dependency graph for OSTM.cpp:

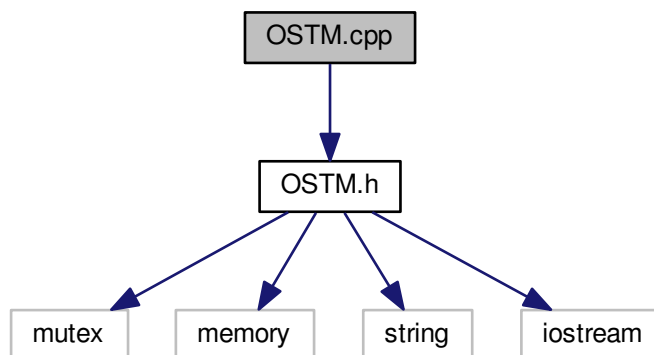

6.16 OSTM.cpp

```

00001 /*
00002  * File:   OSTM.cpp
00003  * Author: Zoltan Fuzesi C00197361,
00004  * IT Carlow, Software Engineering,
00005  *
00006  * Supervisor : Joe Kehoe,
00007  *
00008  * C++ Software Transactional Memory,
00009  *
00010  * Created on December 18, 2017, 2:09 PM
00011  * OSTM base class function declarations.
00012  */
00013
00014 #include "OSTM.h"
00015
00016 int OSTM::global_Unique_ID_Number = 0;
00017
00021 OSTM::OSTM()
00022 {
00023     /* @24 Integer field <version> indicates the version number of the inherited child object */
00024     this->version = ZERO;
00025     /* @26 Integer field <uniqueID> is a unique identifier assigned to every object registered in OSTM
library */
00026     this->uniqueID = Get_global_Unique_ID_Number();
00027     /* @28 Boolean value <canCommit> to determine the object can or cannot commit */
00028     this->canCommit = true;
00029     /* @30 Boolean field <abort_Transaction> to determine the object can or cannot commit */
00030     this->abort_Transaction = false;
00031 }

```

```

00032
00033
00039 OSTM::OSTM(int _version_number_, int _unique_id_)
00040 {
00041     /* @42 Integer field <version> indicates the version number of the inherited child object */
00042     this->uniqueID = _unique_id_;
00043     /* @44 Integer field <uniqueID> is a unique identifier assigned to every object registered in OSTM
library */
00044     this->version = _version_number_;
00045     /* @46 Boolean value <canCommit> to determine the object can or cannot commit */
00046     this->canCommit = true;
00047     /* @48 Boolean value <abort_Transaction> to determine the object can or cannot commit */
00048     this->abort_Transaction = false;
00049 }
00050
00054 OSTM::~~OSTM() {
00055     /* Destroy the object. */
00056 }
00061 int OSTM::Get_global_Unique_ID_Number() {
00062     /* @64 Checking the global_Unique_ID_Number */
00063     if(global_Unique_ID_Number > 10000000)
00064         /* @65 Reset global_Unique_ID_Number to ZERO*/
00065         global_Unique_ID_Number = 0;
00066     /* @67 return static global_Unique_ID_Number */
00067     return ++global_Unique_ID_Number;
00068 }
00069
00075 void OSTM::Set_Unique_ID(int uniqueID) {
00076     /* @77 set object uniqueID to parameter integer value */
00077     this->uniqueID = uniqueID;
00078 }
00082 int OSTM::Get_Unique_ID() const
00083 {
00084     /* @85 return Object uniqueID */
00085     return uniqueID;
00086 }
00092 void OSTM::Set_Version(int version)
00093 {
00094     /* @95 set object version to parameter integer value */
00095     this->version = version;
00096 }
00100 int OSTM::Get_Version() const
00101 {
00102     /* return object version number */
00103     return version;
00104 }
00108 void OSTM::increase_VersionNumber()
00109 {
00110     /* @111 increase object version number */
00111     this->version += 1;
00112 }
00117 void OSTM::Set_Can_Commit(bool canCommit) {
00118     /* @119 set canCommit object variable to parameter boolean value*/
00119     this->canCommit = canCommit;
00120 }
00124 bool OSTM::Is_Can_Commit() const {
00125     /* @126 return canCommit boolean value TRUE/FALSE */
00126     return canCommit;
00127 }
00132 void OSTM::Set_Abort_Transaction(bool abortTransaction) {
00133     /* @134 set abort_Transaction object variable to parameter boolean value */
00134     this->abort_Transaction = abortTransaction;
00135 }
00140 bool OSTM::Is_Abort_Transaction() const {
00141     /* @142 return abort_Transaction object boolean value */
00142     return abort_Transaction;
00143 }
00147 void OSTM::lock_Mutex() {
00148     /* @149 Locking the mutex*/
00149     this->mutex.lock();
00150 }
00154 void OSTM::unlock_Mutex() {
00155     /* @156 Locking the mutex */
00156     this->mutex.unlock();
00157 }
00162 bool OSTM::try_lock(){
00163     /* @164 Try to unlock the mutex, return TRUE if the lock was acquired successfully, otherwise return
FALSE */
00164     return this->mutex.try_lock();
00165 }


```

6.17 OSTM.h File Reference


```
#include <mutex>
```



```
#include <memory>
#include <string>
#include <iostream>
Include dependency graph for OSTM.h:
```

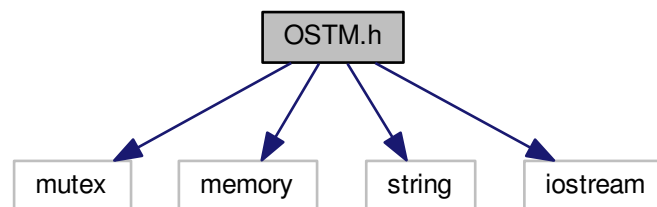

This graph shows which files directly or indirectly include this file:

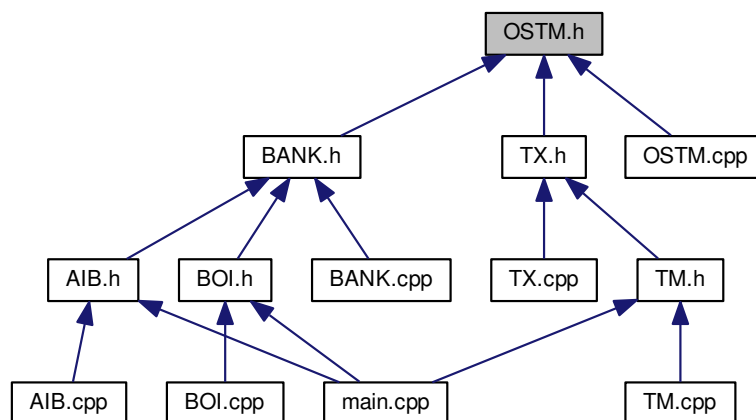

Classes

- class [OSTM](#)

6.18 OSTM.h

```
00001
00015 #ifndef OSTM_H
00016 #define OSTM_H
00017 #include <mutex>
00018 #include <memory>
00019 #include <string>
00020 #include <iostream>
00021 #include <string>
00022
```


```

00023 class OSTM {
00024 public:
00025     /*
00026      * Default Constructor
00027      */
00028     OSTM();
00029     /*
00030      * Custom Constructor
00031      */
00032     OSTM(int _version_number_, int _unique_id_);
00033     /*
00034      * De-constructor
00035      */
00036     virtual ~OSTM();
00041     virtual void copy(std::shared_ptr<OSTM> from, std::shared_ptr<OSTM> to){};
00046     virtual std::shared_ptr<OSTM> getBaseCopy(std::shared_ptr<OSTM> object){};
00051     virtual void toString(){};
00052     /*
00053      * Setter for object unique id
00054      * @param uniqueID Integer to set the uniqueID
00055      */
00056     void Set_Unique_ID(int uniqueID);
00057     /*
00058      * Getter for object unique id
00059      */
00060     int Get_Unique_ID() const;
00061     /*
00062      * Setter for object version number
00063      * @param version Integer to set the version number
00064      */
00065     void Set_Version(int version);
00066     /*
00067      * Getter for object version number
00068      */
00069     int Get_Version() const;
00070     /*
00071      * When transaction make changes on object at commit time increase the version number on the object.
00072      */
00073     void increase_VersionNumber();
00074     /*
00075      * Determin if the object can commit or not. Return boolean TRUE/FALSE
00076      */
00077     bool Is_Can_Commit() const;
00078     /*
00079      * Setter for canCommit boolean filed
00080      * @param canCommit Boolean to set the canCommit variable
00081      */
00082     void Set_Can_Commit(bool canCommit);
00083     /*
00084      * set boolean
00085      * @param abortTransaction boolean to set the abort_Transaction TRUE or FALSE
00086      */
00087     void Set_Abort_Transaction(bool abortTransaction);
00088     /*
00089      * Determin if the object need to abort the transaction or not. Return boolean TRUE/FALSE
00090      */
00091     bool Is_Abort_Transaction() const;
00092     /*
00093      * Function to lock the object itself
00094      */
00095     void lock_Mutex();
00096     /*
00097      * Function to unlock the object itself
00098      */
00099     void unlock_Mutex();
00100     /*
00101      * Function to try lock the object itself if it is not locked. Return boolean value TRUE/FALSE
00102      * depending if it is can lock or not.
00103      */
00104     bool try_lock();
00105 private:
00111     int version;
00117     int uniqueID;
00121     bool canCommit;
00125     bool abort_Transaction;
00130     static int global_Unique_ID_Number;
00134     const int ZERO = 0;
00139     std::mutex mutex;
00143     int Get_global_Unique_ID_Number();
00144 };
00145 #endif
00146
00147 #endif /* OSTM_H */

```

6.19 TM.cpp File Reference

```
#include "TM.h"
#include <thread>
#include <unistd.h>
#include <sys/types.h>
#include <iostream>
Include dependency graph for TM.cpp:
```

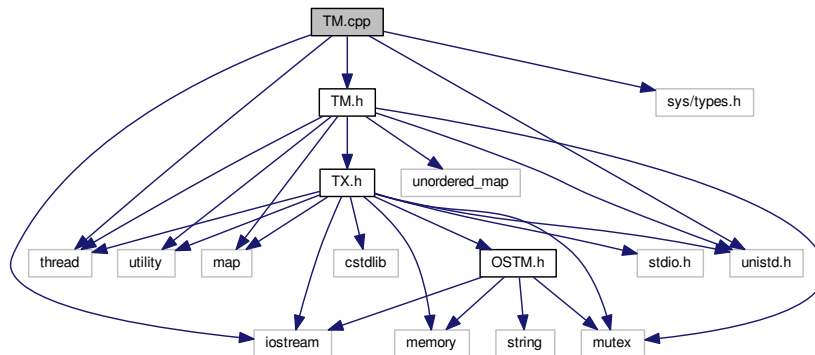

6.20 TM.cpp

```
00001 /*
00002  * File: TM.cpp
00003  * Author: Zoltan Fuzesi C00197361,
00004  * IT Carlow, Software Engineering,
00005  *
00006  * Supervisor : Joe Kehoe,
00007  *
00008  * C++ Software Transactional Memory,
00009  *
00010  * Created on December 18, 2017, 2:09 PM
00011  * OSTM base class function declarations.
00012  */
00013
00014 #include "TM.h"
00015 #include <thread>
00016 #include <unistd.h>
00017 #include <sys/types.h>
00018 #include <iostream>
00019
00020 /*
00021  * @23 _tm_id pid_t, process id determine the actual process between process in the STM library
00022  */
00023 pid_t TM::_tm_id;
00024 /*
00025  * @27 static Global std::map process_map_collection store all transactional objects/pointers
00026  */
00027 std::map<pid_t, std::map< std::thread::id, int >> TM::process_map_collection;
00031 TM& TM::Instance() {
00032     /* @33 _instance TM, static class reference to the instance of the Transaction Manager class */
00033     static TM _instance;
00034     /* @35 _instance ppid, assigning the process id whoever created the Singleton instance */
00035     _instance._tm_id = getpid();
00036     /* @37 return Singleton instance */
00037     return _instance;
00038 }
00039
00045 void TM::registerTX()
00046 {
00047     /* @49 guard std::lock_guard, locks the register_Lock mutex, unlock automatically when goes out of the
00048     scope register_Lock std::mutex, used by the lock_guard to protect shared map from race conditions */
00048     std::lock_guard<std::mutex> guard(register_Lock);
00049     /* @51 getppid() return the actual main process thread id, I used it to associate the Transactionas
```

```

with the main processes */
00050     pid_t ppid = getppid();
00051
00052     /* @53 process_map_collection try to find the main process by it's ppid if registered in the library */
00053     std::map<pid_t, std::map< std::thread::id, int >>::iterator process_map_collection_Iterator =
TM::process_map_collection.find(ppid);
00054     /* @55 Check if iterator pointing to the end of the process map then register */
00055     if (process_map_collection_Iterator == TM::process_map_collection.end()) {
00056         /* @57 Require new map to insert to the process map as a value by the ppid key */
00057         std::map< std::thread::id, int >map = get_thread_Map();
00058         /* @59 Register main process/application to the global map */
00059         TM::process_map_collection.insert({ppid, map});
00060     }
00061
00062     /* @63 txMap std::map, collection to store all transaction created by the Transaction Manager */
00063     std::map<std::thread::id, std::shared_ptr < TX>>::iterator it = txMap.find(
std::this_thread::get_id());
00064     /* @65 Check if iterator pointing to the end of the txMap then insert */
00065     if (it == txMap.end()) {
00066         /* @67 Create a new Transaction Object as a shared pointer */
00067         std::shared_ptr<TX> _transaction_object(new TX(std::this_thread::get_id()));
00068         /* @69 txMap insert the new transaction into the txMap by the threadID key */
00069         txMap.insert({std::this_thread::get_id(), _transaction_object});
00070         /* @71 Get the map if the transaction registered first time */
00071         process_map_collection_Iterator = TM::process_map_collection.find(ppid);
00072         /* @73 Insert to the GLOBAL MAP as a helper to clean up at end of main process. The value 1 is not
used yet */
00073         process_map_collection_Iterator->second.insert({std::this_thread::get_id(), 1});
00074     }
00075 }
00076
00081 std::shared_ptr<TX>const TM::_get_tx()
00082 {
00083
00084     /* @85 guard std::lock_guard, locks the get_Lock mutex, unlock automatically when goes out of the scope
get_Lock std::mutex, used by the lock_guard to protect txMap from race conditions */
00085     std::lock_guard<std::mutex> guard(get_Lock);
00086     /* @87 txMap try to find the TX Transaction object by it's actual thread ID if registred in the txMap
*/
00087     std::map<std::thread::id, std::shared_ptr<TX>>::iterator it = txMap.find(std::this_thread::get_id(
));
00088     /* @89 Check if iterator pointing to the end of the txMap then insert */
00089     if(it == txMap.end())
00090     {
00091         /* @92 If cannot find then call the register function to register the thread with a transaction */
00092         registerTX();
00093         /* @94 If it's registered first time then we need to find it after registration */
00094         it = txMap.find(std::this_thread::get_id());
00095     }
00096     else {
00097         /* @98 If transaction already registered, it means the thread participating in nested transactions,
and increase the nesting */
00098         it->second->_increase_tx_nesting();
00099     }
00100     /* @101 Returning back the transaction (TX) object to the thread */
00101     return it->second;
00102 }
00103
00108 void TM::_TX_EXIT(){
00109     /* @110 Transaction manger create a local Transaction Object to access the TX class function without
nesting any transaction */
00110     TX tx(std::this_thread::get_id());
00111     /* @112 getppid() return the actual main process thread id, I used it to associate the Transactionas
with the main processes */
00112     pid_t ppid = getppid();
00113     /* @114 process_map_collection try to find the main process by it's ppid if registered in the library */
00114     std::map<pid_t, std::map< std::thread::id, int >>::iterator process_map_collection_Iterator =
TM::process_map_collection.find(ppid);
00115     /* @116 Check if iterator NOT pointing to the end of the process map then register */
00116     if (process_map_collection_Iterator != TM::process_map_collection.end()) {
00117         /* @118 Iterate through the process_map_collection to find all transaction associated with main
process */
00118         for (auto current = process_map_collection_Iterator->second.begin(); current !=
process_map_collection_Iterator->second.end(); ++current) {
00119             /* @120 Delete all transaction associated with the actual main process */
00120             txMap.erase(current->first);
00121         }
00122         /* @123 When all transaction deleted, delete the main process from the Transaction Manager */
00123         TM::process_map_collection.erase(ppid);
00124     }
00125     /* @126 TX class delete all Global Object shared between the transaction. This function calls only when
the main process exists to clear out memory */
00126     tx.ostm_exit();
00127 }
00132 void TM::print_all(){
00133     /* @134 Locking the print function */
00134     get_Lock.lock();

```

```

00135     /* @136 Iterate through the txMap to print out the thread id's*/
00136     for (auto current = txMap.begin(); current != txMap.end(); ++current) {
00137         /* @138 Print key (thread number)*/
00138         std::cout << "KEY : " << current->first << std::endl;
00139     }
00140     /* @140 Unlocking the print function*/
00141     get_Lock.unlock();
00142 }
00143
00148 std::map< std::thread::id, int > TM::get_thread_Map() {
00149     /* @150 thread_Map std::map< int, int > create a map to store int key and int value */
00150     std::map< std::thread::id, int > thread_Map;
00151     /* @152 return the map */
00152     return thread_Map;
00153 }

```


6.21 TM.h File Reference

```


#include <thread>
#include <unistd.h>
#include <mutex>
#include <unordered_map>
#include <utility>
#include <map>
#include "TX.h"

```

Include dependency graph for TM.h:

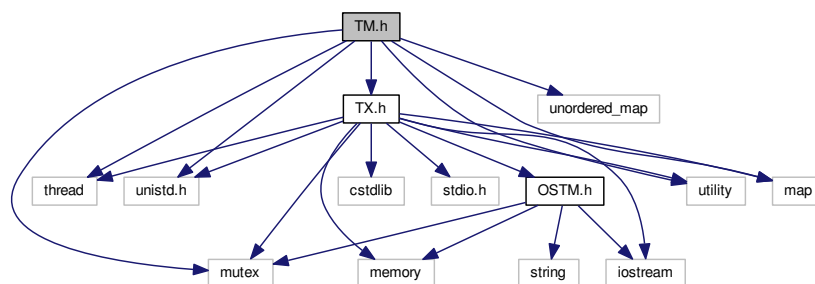

This graph shows which files directly or indirectly include this file:



Classes

- class [TM](#)

6.22 TM.h

```

00001
00059 #ifndef TM_H
00060 #define TM_H
00061
00062 #include <thread>
00063 #include <unistd.h> //used for pid_t
00064 #include <mutex>
00065 #include <unordered_map>
00066 #include <utility>
00067 #include <map>
00068 #include "TX.h"
00069
00070 class TM {
00071 private:
00072     /*
00073      * TM constructor, prevent from multiple instantiation
00074      */
00075     TM() = default;
00076     /*
00077      * TM de-constructor, prevent from deletion
00078      */
00079     ~TM() = default;
00083     TM(const TM&) = delete;
00087     TM& operator=(const TM&) = delete;
00088     /*
00089      * txMap std::map, store all transactional objects created with Transaction Manager
00090      */
00091     std::map<std::thread::id, std::shared_ptr<TX>> txMap;
00092     /*
00093      * STATIC GLOBAL MAP Collection to store all process associated keys to find when deleting transactions
00094      */
00095     static std::map<pid_t, std::map< std::thread::id, int >>
process_map_collection;
00096     /*
00097      * get_thread_Map returning and map to insert to the process_map_collection as an inner value
00098      */
00099     std::map< std::thread::id, int > get_thread_Map();
00100     /*
00101      * registerTX void, register transaction into txMap
00102      */
00103     void registerTX();
00104     /*
00105      * register_Lock std::mutex, used in the registerTX function
00106      */
00107     std::mutex register_Lock;
00108     /*
00109      * register_Lock std::mutex, used in the _get_tx function
00110      */
00111     std::mutex get_Lock;
00112     /*
00113      * _tm_id pid_t, process id determine the actual process between process in the shared OSTM library
00114      */
00115     static pid_t _tm_id;
00116
00117 public:
00121     static TM& Instance();
00125     std::shared_ptr<TX> const _get_tx();
00130     void _TX_EXIT();
00134     void print_all();
00135 };
00136
00137
00138 #endif // TM_H

```


6.23 TX.cpp File Reference

```

#include "TX.h"
#include <iostream>

```

Include dependency graph for TX.cpp:

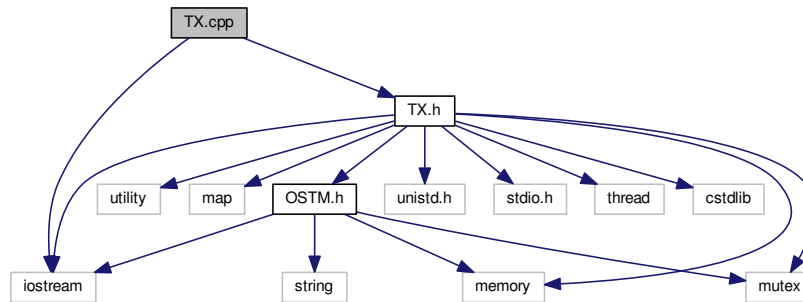

6.24 TX.cpp

```

00001 /*
00002  * File: TX.cpp
00003  * Author: Zoltan Fuzesi C00197361,
00004  * IT Carlow, Software Engineering,
00005  *
00006  * Supervisor : Joe Kehoe,
00007  *
00008  * C++ Software Transactional Memory,
00009  *
00010  * Created on December 18, 2017, 2:09 PM
00011  * OSTM base class function declarations.
00012  */
00013
00014 #include "TX.h"
00015 #include <iostream>
00016 /*
00017  @19 main_Process_Map_collection, register static Global class level map to store all transactional
00018  objects/pointers
00019  */
00019 std::map<int, std::shared_ptr<OSTM> >TX::main_Process_Map_collection;
00020 /*
00021  @23 process_map_collection, register static Global class level map to store all transaction number
00022  associated with the main process
00023  */
00023 std::map<pid_t, std::map< int, int >> TX::process_map_collection;
00024 /*
00025  @27 egister_Lock, register static class level shared std::mutex to protect shared map during transaction
00026  registration
00027  */
00027 std::mutex TX::register_Lock;
00028 /*
00029  @31 test_counter, register class level Integer variable to store the umber of rollback happens, for
00030  testing purposes
00031  */
00031 int TX::test_counter = 0;
00036 TX::TX(std::thread::id id) {
00037  /* @38 Integer field <transaction_Number> indicates the transaction number to the Transaction manager
00038  */
00038  this->transaction_Number = id;
00039  /* @40 Integer field <_tx_nesting_level> indicates the nesting level to the transaction itself */
00040  this->_tx_nesting_level = 0;
00041 }
00045 TX::~TX() {
00046  /* Destroy the object. */
00047 }
00052 void TX::th_exit() {
00053  /* @54 If bigger than ZERO, means active nested transactions running in background, do not delete
00054  anything yet */
00054  if (this->_tx_nesting_level > 0) {
00055  /* Active nested transactions running in background, do not delete anything yet */
00056  } else {
00057  /* Remove all elements map entries from transaction and clear the map */
00058  working_Map_collection.clear();
00059  }
00060 }
00061

```

```

00068 void TX::ostm_exit() {
00069     /* @70 Declare Iterator main_Process_Map_collection_Iterator */
00070     std::map<int, std::shared_ptr<OSTM>>::iterator main_Process_Map_collection_Iterator;
00071     /* @72 getpid() return the actual main process thread id, I used it to associate the Transactionas
with the main processes */
00072     pid_t ppid = getpid();
00073     /* @74 process_map_collection try to find the main process by it's ppid if registered in the library */
00074     std::map<pid_t, std::map< int, int >>::iterator process_map_collection_Iterator =
TX::process_map_collection.find(ppid);
00075     /* @76 Check if iterator NOT pointing to the end of the process_map_collection then remove all
associated elements */
00076     if (process_map_collection_Iterator != TX::process_map_collection.end()) {
00077         /* @78 Iterate through the process_map_collection to find all transaction associated with main
process */
00078         for (auto current = process_map_collection_Iterator->second.begin(); current !=
process_map_collection_Iterator->second.end(); ++current) {
00079             /* @80 Find the OSTM object in the Global shared map */
00080             main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find(current->first);
00081             /* @82 If object found then delete it */
00082             if (main_Process_Map_collection_Iterator !=
TX::main_Process_Map_collection.end()) {
00083                 /* @84 Delete element from shared main_Process_Map_collection by object by the unique key,
and the shaed_ptr will destroy automatically */
00084                 TX::main_Process_Map_collection.erase(
main_Process_Map_collection_Iterator->first);
00085             }
00086         }
00087         /* @88 Delete main process from Process_map_collection */
00088         TX::process_map_collection.erase(process_map_collection_Iterator->first);
00089     }
00090 }
00091
00096 void TX::register(std::shared_ptr<OSTM> object) {
00097     /* @98 register_Lock(mutex) shared lock between all transaction. MUST USE SHARED LOCK TO PROTECT SHARED
GLOBAL MAP/COLLECTION */
00098     std::lock_guard<std::mutex> guard(TX::register_Lock);
00099     /* @100 RUNTIME ERROR. Check for null pointer ! Null pointer can cause segmentation fault!!! */
00100     if(object == nullptr){
00101         throw std::runtime_error(std::string("[RUNTIME ERROR : NULL POINTER IN REGISTER FUNCTION]") );
00102     }
00103     /* @104 getpid() return the actual main process thread id, I used it to associate the Transactionas
with the main processes */
00104     pid_t ppid = getpid();
00105     /* @106 Declare and initialize Iterator for process_map_collection, find main process */
00106     std::map<pid_t, std::map< int, int >>::iterator process_map_collection_Iterator =
TX::process_map_collection.find(ppid);
00107     /* @108 If iterator cannot find main process, then register */
00108     if (process_map_collection_Iterator == TX::process_map_collection.end()) {
00109         /* @110 Create new empty map */
00110         std::map< int, int >map = get_thread_Map();
00111         /* @112 Register main process/application to the global map */
00112         TX::process_map_collection.insert({ppid, map});
00113         /* @114 Get the map if registered first time */
00114         process_map_collection_Iterator = TX::process_map_collection.find(ppid);
00115     }
00116     /* @117 Declare and initialize Iterator for main_Process_Map_collection, find by original object */
00117     std::map<int, std::shared_ptr<OSTM>>::iterator main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find(object->Get_Unique_ID());
00118     /* @119 If object cannot find, then register */
00119     if (main_Process_Map_collection_Iterator == TX::main_Process_Map_collection
.end()) {
00120         /* @121 Insert the origin object to the GLOBAL MAP shared between transactions */
00121         TX::main_Process_Map_collection.insert({object->Get_Unique_ID(),
object});
00122         /* @123 Insert object ID to the GLOBAL MAP as a helper to clean up at end of main process, Second
value (1) not specified yet */
00123         process_map_collection_Iterator->second.insert({object->Get_Unique_ID(), 1});
00124     }
00125     /* @126 Declare and initialize Iterator for working_Map_collection, find copy of the original object */
00126     std::map< int, std::shared_ptr<OSTM> >::iterator working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.find(object->Get_Unique_ID());
00127     /* @128 If copy of the object not found, then register */
00128     if (working_Map_collection_Object_Shared_Pointer_Iterator ==
working_Map_collection.end()) {
00129         /* @130 Register transaction own copy of the original object */
00130         working_Map_collection.insert({object->Get_Unique_ID(), object->getBaseCopy(
object)}});
00131     }
00132 }
00137 std::shared_ptr<OSTM> TX::load(std::shared_ptr<OSTM> object) {
00138     /* @139 Declare and initialize Iterator for working_Map_collection */
00139     std::map< int, std::shared_ptr<OSTM> >::iterator working_Map_collection_Object_Shared_Pointer_Iterator;
00140     /* @141 RUNTIME ERROR. Check for null pointer ! Null pointer can cause segmentation fault!!! */
00141     if(object == nullptr){
00142         throw std::runtime_error(std::string("[RUNTIME ERROR : NULL POINTER IN LOAD FUNCTION]") );
00143     }

```



```

00144     /* @145 Find copy object in working_Map_collection by the object unique ID*/
00145     working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.find(object->Get_Unique_ID());
00146     /* @147 If object found, then return it */
00147     if (working_Map_collection_Object_Shared_Pointer_Iterator !=
working_Map_collection.end()) {
00148         /* @149 Returning a copy of the working copy object */
00149         return working_Map_collection_Object_Shared_Pointer_Iterator->second->getBaseCopy(
working_Map_collection_Object_Shared_Pointer_Iterator->second);
00150     /* @151 If no object found, throw runtime error */
00151     } else { throw std::runtime_error(std::string("[RUNTIME ERROR : NO OBJECT FOUND LOAD FUNCTION]") );};
00152 }
00157 void TX::store(std::shared_ptr<OSTM> object) {
00158     /* @159 RUNTIME ERROR. Check for null pointer ! Null pointer can cause segmentation fault!!! */
00159     if(object == nullptr){
00160         throw std::runtime_error(std::string("[RUNTIME ERROR : NULL POINTER IN STORE FUNCTION]") );
00161     }
00162     /* @163 Declare and initialize Iterator for working_Map_collection */
00163     std::map< int, std::shared_ptr<OSTM> >::iterator working_Map_collection_Object_Shared_Pointer_Iterator;
00164     /* @165 Find copy object in working_Map_collection by the object unique ID*/
00165     working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.find(object->Get_Unique_ID());
00166     /* @167 If object found, then replace it */
00167     if (working_Map_collection_Object_Shared_Pointer_Iterator !=
working_Map_collection.end()) {
00168         /* @169 Replace copy object in working_Map_collection associated with the unique ID key*/
00169         working_Map_collection_Object_Shared_Pointer_Iterator->second = object;
00170     /* @171 If error happes during store procees throw runtime error */
00171     } else { throw std::runtime_error(std::string("[RUNTIME ERROR : NO OBJECT FOUND STORE FUNCTION, CANNOT
STORE OBJECT]") );};
00172 }
00177 bool TX::commit() {
00178     /* @179 Declare can_Commit boolean variable */
00179     bool can_Commit = true;
00180     /* @182 Dealing with nested transactions first. if nesting level bigger than ZERO do not commit yet */
00181     if (this->tx_nesting_level > 0) {
00182         /* @183 Decrease nesting level @see _decrease_tx_nesting() */
00183         _decrease_tx_nesting();
00184         return true;
00185     }
00186     /* @187 Declare and initialize Iterator for working_Map_collection */
00187     std::map< int, std::shared_ptr<OSTM> >::iterator working_Map_collection_Object_Shared_Pointer_Iterator;
00188     /* @189 Declare and initialize Iterator for main_Process_Map_collectio */
00189     std::map<int, std::shared_ptr<OSTM>>::iterator main_Process_Map_collection_Iterator;
00190     /* @191 Iterate through the working_Map_collection, for all associated copy objetcs */
00191     for (working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.begin(); working_Map_collection_Object_Shared_Pointer_Iterator
!= working_Map_collection.end();
working_Map_collection_Object_Shared_Pointer_Iterator++) {
00192         /* @193 Find the Original object in the Shared global collection by the copy object unique ID */
00193         main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find(
working_Map_collection_Object_Shared_Pointer_Iterator->second->Get_Unique_ID());
00194         /* @195 RUNTIME ERROR. If no object found ! Null pointer can cause segmentation fault!!! */
00195         if(main_Process_Map_collection_Iterator ==
TX::main_Process_Map_collection.end())
00196         {
00197             throw std::runtime_error(std::string("[RUNTIME ERROR : CAN'T FIND OBJECT COMMIT FUNCTION]")
);
00198         }
00199
00200         /* @200 Busy waiting WHILE try_lock function return false, If the object locked by another
transaction, then wait until it's get unlocked, then lock it */
00201         while(!(main_Process_Map_collection_Iterator->second->try_lock());
00202             /* @203 Compare the original global object version number with the working object version number.
If the version number not same, then it cannot commit*/
00203             if (main_Process_Map_collection_Iterator->second->Get_Version() >
working_Map_collection_Object_Shared_Pointer_Iterator->second->Get_Version()) {
00204                 /* @2005 Set object boolean value to FALSE, cannot commit */
00205                 working_Map_collection_Object_Shared_Pointer_Iterator->second->Set_Can_Commit(false);
00206                 /* @207 Set canCommit false Indicate rollback must happen */
00207                 can_Commit = false;
00208                 break;
00209             } else {
00210                 /* @210 If version number are has same value set object boolean value to TRUE*/
00211                 working_Map_collection_Object_Shared_Pointer_Iterator->second->Set_Can_Commit(true);
00212             }
00213         }
00214         /* @214 IF can_Commit boolean value setted for FALSE then rollback all copy object in the transaction
to the Global object values*/
00215         if (!can_Commit) {
00216             /* @217 iterate through all transaction copy objects one by one */
00217             for (working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.begin(); working_Map_collection_Object_Shared_Pointer_Iterator
!= working_Map_collection.end();
working_Map_collection_Object_Shared_Pointer_Iterator++) {
00218                 /* @219 Find the Global shared object by the transaction copy object unique ID */

```

```

00219         main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find(
working_Map_collection_Object_Shared_Pointer_Iterator->second->Get_Unique_ID());
00220         /* @221 Copy all Global shared original objects changed values by another transaction to the
transaction copy objects */
00221         (working_Map_collection_Object_Shared_Pointer_Iterator->second)->copy(
working_Map_collection_Object_Shared_Pointer_Iterator->second, main_Process_Map_collection_Iterator->second);
00222     }
00223     /* @224 When the transaction finish to change copying all values from original objects to local
copy, then release all Global shared objects. @see _release_object_lock() */
00224     _release_object_lock();
00225     /* @226 Return FALSE to indicate the transaction must restart !*/
00226     return false;
00227 } else {
00228     /* @229 Iterate through working_map_collection. If no conflict detected in early stage in the
transaction, then commit all the local changes to shared Global objects */
00229     for (working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.begin(); working_Map_collection_Object_Shared_Pointer_Iterator
!= working_Map_collection.end();
working_Map_collection_Object_Shared_Pointer_Iterator++) {
00230         /* @231 Find the Global shared object by the transaction copy object unique ID */
00231         main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find((
working_Map_collection_Object_Shared_Pointer_Iterator->second->Get_Unique_ID());
00232         /* @233 If Global shared object found then commit changes */
00233         if (main_Process_Map_collection_Iterator !=
TX::main_Process_Map_collection.end()) {
00234             /* @235 Copy over local transaction object values to original Global object*/
00235             (main_Process_Map_collection_Iterator->second)->copy(
main_Process_Map_collection_Iterator->second, working_Map_collection_Object_Shared_Pointer_Iterator->second);
00236             /* @237 Increase the version number in the original pointer*/
00237             main_Process_Map_collection_Iterator->second->increase_VersionNumber();
00238             /* @195 RUNTIME ERROR. If no object found ! Null pointer can cause segmentation fault!!! */
00239             } else { throw std::runtime_error(std::string("[RUNTIME ERROR : CAN'T FIND OBJECT COMMIT
FUNCTION]")); }
00240         }
00241         /* @242 When the transaction finish with commit all changes, then release all Global shared
objects. @see _release_object_lock() */
00242         _release_object_lock();
00243         /* @244 Transaction object clean up all associated values, clean memory. @see th_exit()*/
00244         this->th_exit();
00245         /* @246 Return TRUE, indicate the transaction has finished. */
00246         return true;
00247     }
00248 }
00249
00253 void TX::_release_object_lock(){
00254     /* @255 Declare Iterator for working_Map_collection */
00255     std::map< int, std::shared_ptr<OSTM> >::iterator working_Map_collection_Object_Shared_Pointer_Iterator;
00256     /* @255 Declare Iterator for working_Map_collection */
00257     std::map<int, std::shared_ptr<OSTM>>::iterator main_Process_Map_collection_Iterator;
00258     for (working_Map_collection_Object_Shared_Pointer_Iterator =
working_Map_collection.begin(); working_Map_collection_Object_Shared_Pointer_Iterator
!= working_Map_collection.end();
working_Map_collection_Object_Shared_Pointer_Iterator++) {
00259         /* @260 Find Global shared original object by the transaction object unique ID*/
00260         main_Process_Map_collection_Iterator =
TX::main_Process_Map_collection.find((
working_Map_collection_Object_Shared_Pointer_Iterator->second->Get_Unique_ID());
00261         /* @262 If object found, then release lock*/
00262         if (main_Process_Map_collection_Iterator !=
TX::main_Process_Map_collection.end()) {
00263             /* @264 Release object lock */
00264             (main_Process_Map_collection_Iterator->second->unlock_Mutex();
00265             }
00266         }
00267     }
00268
00272 void TX::_increase_tx_nesting() {
00273     /* @274 Increase transaction nesting level */
00274     this->_tx_nesting_level += 1;
00275 }
00279 void TX::_decrease_tx_nesting() {
00280     /* @281 Decrease transaction nesting level */
00281     this->_tx_nesting_level -= 1;
00282 }
00283
00287 int TX::getTest_counter() {
00288     /* @289 return class level value hold by test_counter variable */
00289     return TX::test_counter;
00290 }
00294 const std::thread::id TX::_get_tx_number() const {
00295     /* @296 Return the transaction nuber */
00296     return transaction_Number;
00297 }
00301 std::map< int, int > TX::get_thread_Map() {
00302     /* @303 initialize empty map hold int key and values*/

```

```

00303     std::map< int, int > thread_Map;
00304     /* @305 Return the map*/
00305     return thread_Map;
00306 }
00307
00311 void TX::_print_all_tx() {
00312     /* @313 initialise Iterator */
00313     std::map< int, std::shared_ptr<OSTM> >::iterator it;
00314     /* @315 getpid() return the actual main process thread id, I used it to associate the Transactionas
with the main processes */
00315     pid_t ppid = getpid();
00316     /* @317 initialize and assign Iterator to process_map_collection, by the main process id (ppid) */
00317     std::map<pid_t, std::map< int, int >::iterator process_map_collection_Iterator =
TX::process_map_collection.find(ppid);
00318     /* @319 If there is an entry associated with the process then print out all transactions. */
00319     if (process_map_collection_Iterator != TX::process_map_collection.end()) {
00320         /* @321 Iterate through process_map_collection*/
00321         for (auto current = process_map_collection_Iterator->second.begin(); current !=
process_map_collection_Iterator->second.end(); ++current) {
00322             /* @323 Assign value to iterator */
00323             it = working_Map_collection.find(current->first);
00324             /* @325 If value found, then print it */
00325             if(it != working_Map_collection.end()){
00326                 /* @327 print out the transaction number */
00327                 std::cout << "[Unique number ] : " <<it->second->Get_Unique_ID() << std::endl;
00328             }
00329         }
00330     }
00331 }

```


6.25 TX.h File Reference

```


#include <cstdlib>
#include <utility>
#include <map>
#include <iostream>
#include <mutex>
#include <unistd.h>
#include <memory>
#include <stdio.h>
#include <thread>
#include "OSTM.h"

```

Include dependency graph for TX.h:

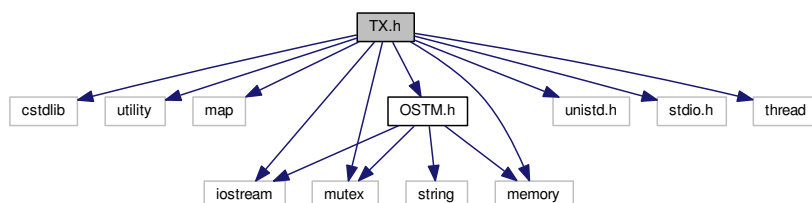

This graph shows which files directly or indirectly include this file:

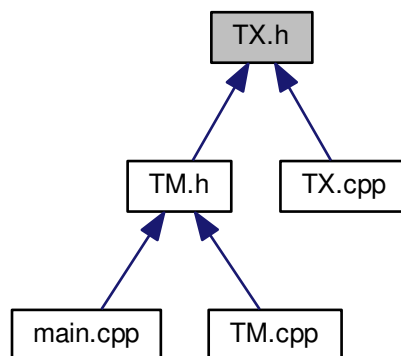

Classes

- class [TX](#)

6.26 TX.h

```

00001 /*
00002  * File:    TX.h
00003  * Author:  Zoltan Fuzesi C00197361,
00004  * IT Carlow, Software Engineering,
00005  *
00006  * Supervisor : Joe Kehoe,
00007  *
00008  * C++ Software Transactional Memory,
00009  *
00010  * Created on December 18, 2017, 2:09 PM
00011  * OSTM base class function declarations.
00012  */
00013
00014 #ifndef TX_H
00015 #define TX_H
00016 #include <cstdlib>
00017 #include <utility>
00018 #include <map>
00019 #include <iostream>
00020 #include <mutex>
00021 #include <unistd.h>
00022 #include <memory>
00023 #include <stdio.h>
00024 #include <thread>
00025 #include "OSTM.h"
00026
00027 class TM;
00028
00029 class TX {
00030 public:
00031     /*
00032      * Custom Constructor
00033      */
00034     TX(std::thread::id id);
00035     /*
00036      * De-constructor
00037      */
00038     ~TX();
00039     /*
00040      * Default copy constructor
00041      */

```

```

00042     TX(const TX& orig);
00043     /*
00044      * Delete all map entries associated with the main process
00045      */
00046     void ostm_exit();
00047     /*
00048      * Register OSTM pointer into STM library
00049      */
00050     void _register(std::shared_ptr<OSTM>  object);
00051     /*
00052      * Load a copy of OSTM shared pointer to main process
00053      */
00054     std::shared_ptr<OSTM>  load(std::shared_ptr<OSTM>  object);
00055     /*
00056      * Store transactional changes
00057      */
00058     void store(std::shared_ptr<OSTM>  object);
00059     /*
00060      * Commit transactional changes
00061      */
00062     bool commit();
00063     /*
00064      * Increase TX (Transaction) nesting level by one
00065      */
00066     void _increase_tx_nesting();
00067     /*
00068      * Decrease TX (transaction) nesting level by one
00069      */
00070     void _decrease_tx_nesting();
00071     /*
00072      * Only TM Transaction Manager can create instance of TX Transaction
00073      */
00074     friend class TM;
00075     /*
00076      * ONLY FOR TESTING!!! returning the number of rollback happened during transactions
00077      */
00078     int getTest_counter();
00079     /*
00080      * test_counter int ONLY FOR TESTING!!! store number of rollbacks
00081      */
00082     static int test_counter;
00083     /*
00084      * TESTING ONLY print all transactions
00085      */
00086     void _print_all_tx() ;
00087
00088
00089 private:
00093     std::map< int, std::shared_ptr<OSTM>  > working_Map_collection;
00097     std::thread::id transaction_Number;
00101     int _tx_nesting_level;
00105     static std::map<int, std::shared_ptr<OSTM>  >main_Process_Map_collection;
00109     static std::map<pid_t, std::map< int, int >> process_map_collection;
00113     std::map< int , int > get_thread_Map();
00117     static std::mutex register_Lock;
00121     const std::thread::id _get_tx_number() const;
00125     void _release_object_lock();
00129     void th_exit();
00130
00131 };
00132 #endif // _TX_H_

```