


# 创建github仓库


(4 封私信).github、git的基本使用-创建仓库并上传文件 - 知乎

## 第一步 创建 github 仓库

1. 打开 github 官网，点击 New repository

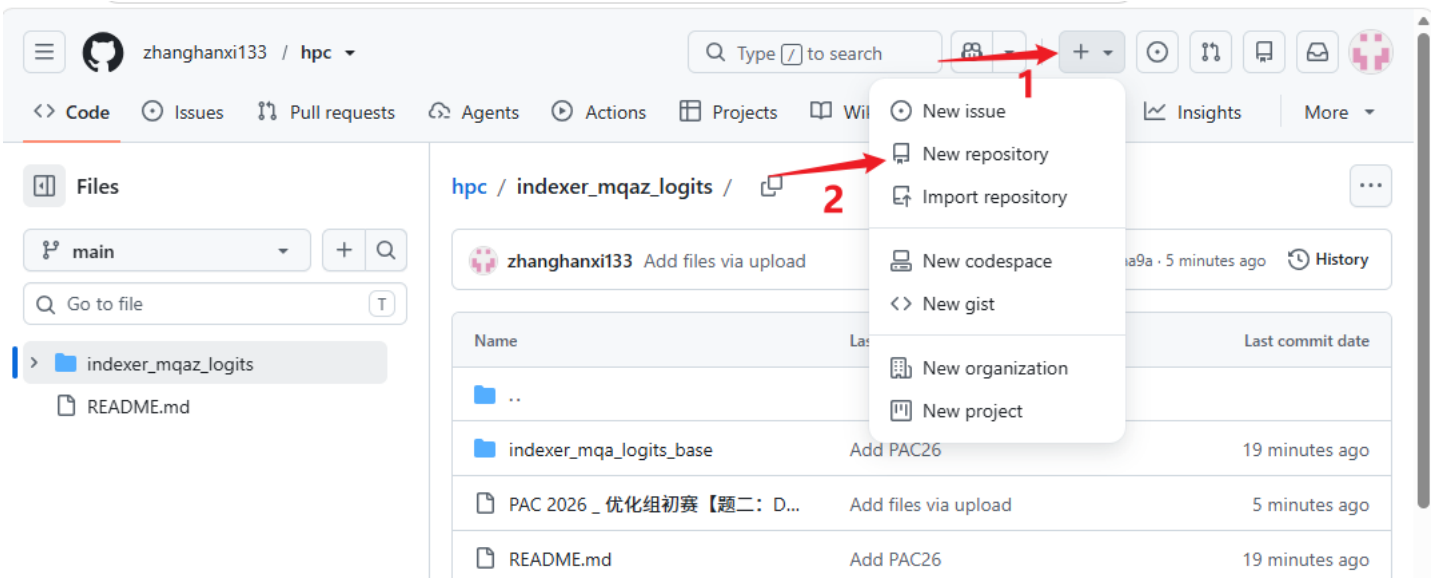


2. 输入仓库名称，其他选项均默认，然后点击 Create repository

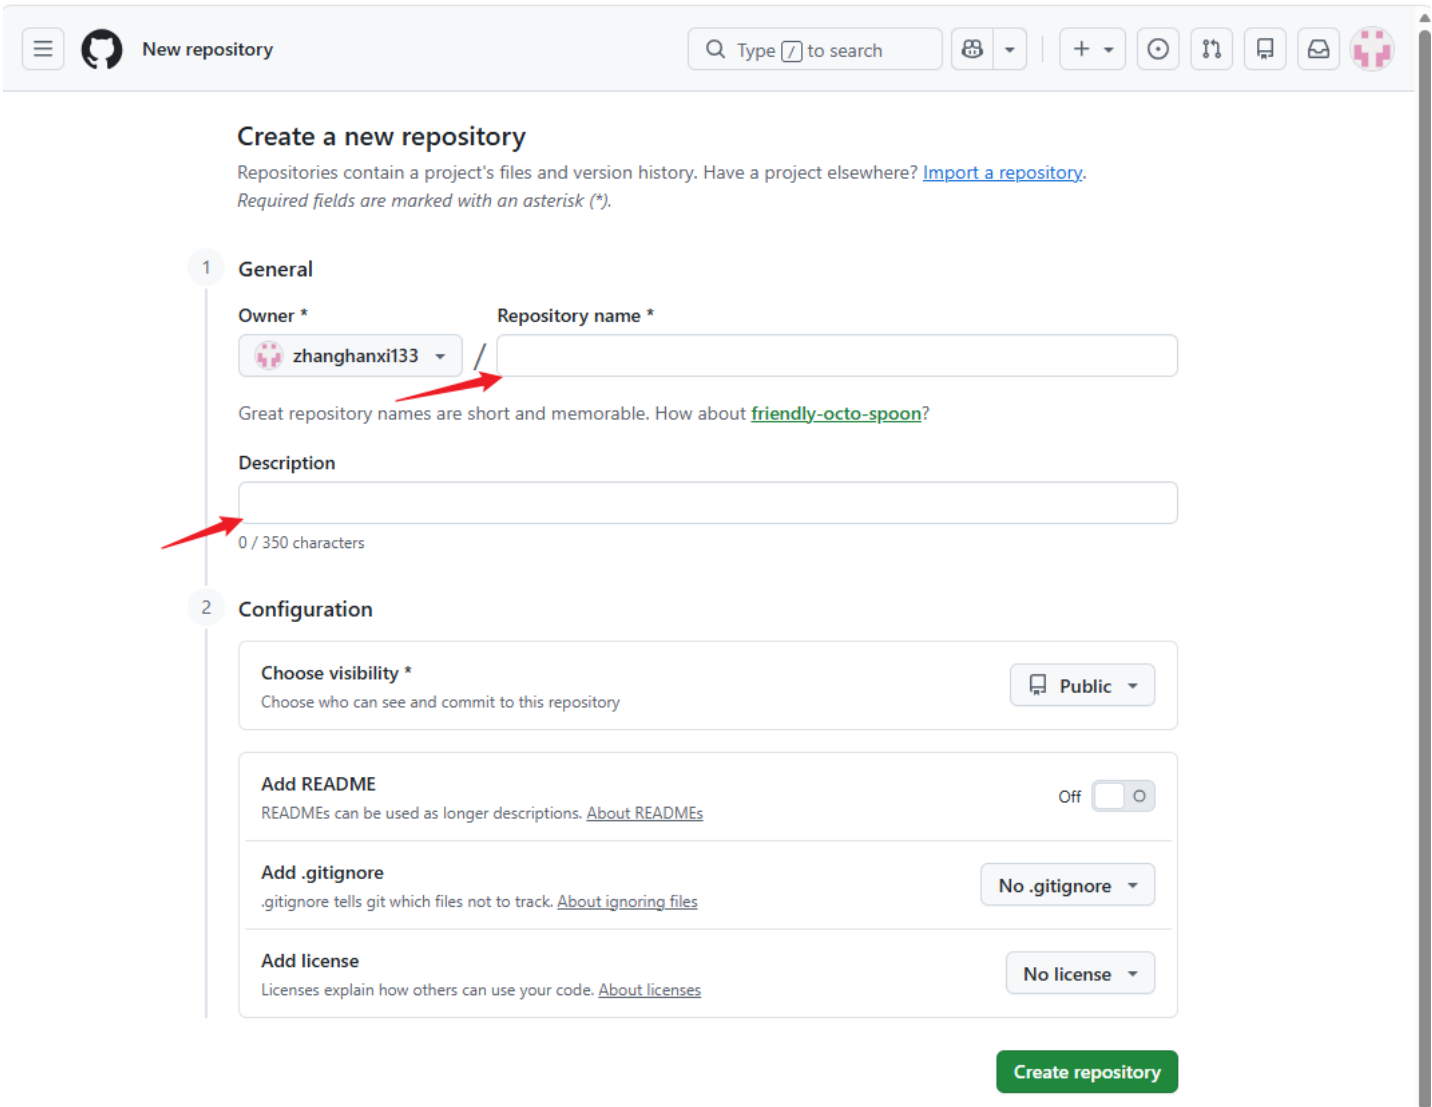

# 第二步 使用 git 上传项目

选择需要上传的文件的文件夹所在目录，Open Git Bash here

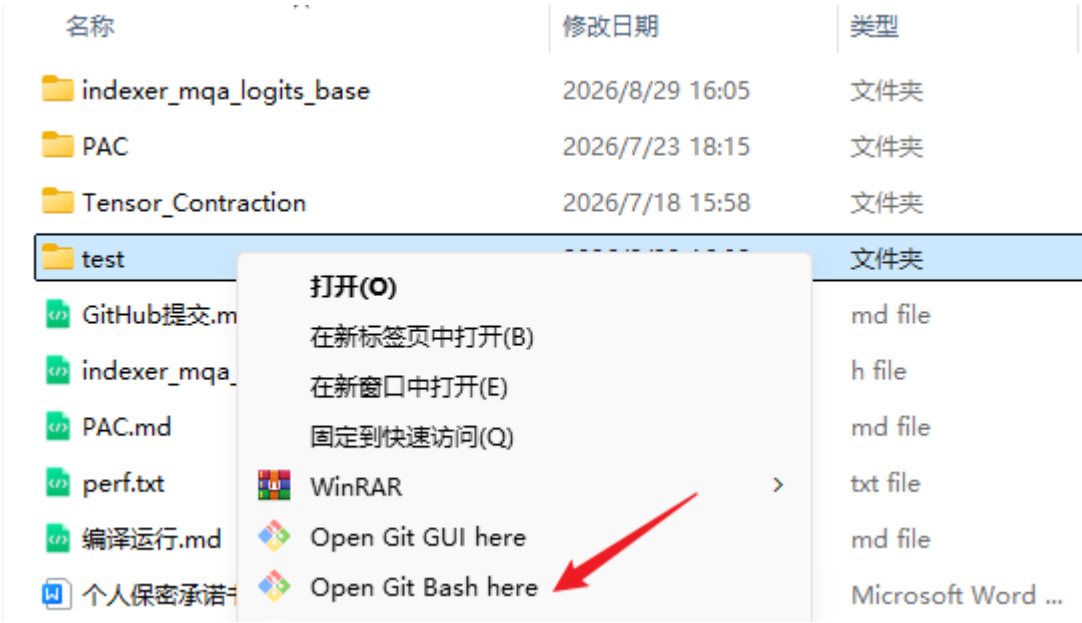

```
1 1.创建 .git 文件夹（初始化仓库）
2 git init
3
4 2.配置 Git 用户信息，包括用户名和邮箱，这些信息会记录在提交的每一次记录中
5 git config --global user.name "zhanghanxi133"
6 git config --global user.email "2956901524@qq.com"
7
8 3.查看当前项目中文件的状态，了解哪些文件是未跟踪的（untracked）、已修改的（modified）,红色表示该文件还未上传
9 git status
10
11 4.将所有未上传的文件提交到暂存区
12 git add .
13
14 5.将暂存区的内容提交到本地仓库（.git 文件夹），并且给予描述
15 git commit -m "description"
16
17 6.将本地仓库与远程仓库关联起来
18 git remote add origin https://github.com/zhanghanxi133/hpc.git
19
20 7.查看本地分支的名称（默认是 master）:一个仓库可以创建多个分支，每一个分支就相当于一个小仓库，各个分支里面的内容互不干扰
21 git branch
22
23 8.当前分支名称是 master，可以将其重命名为 main
24 git branch -m master main
25
26 9.将本地仓库的内容推送到远程仓库（首次推送）
27 git push -u origin main
28
29 9-1.拉取远程仓库的更新，并尝试自动合并到本地分支（就是把 github 仓库的内容拉取到本地，在提交代码之前先拉取，防止代码冲突，第一次提交的时候可以不用拉取）
30 git pull origin main
31
32 至此就完成了全过程,后面如果你还想上传新的文件，重复步骤3、4、5、9即可，并且步骤9可以简写为
33 git push
34
35 # 把远程内容拉下来，合并本地，再推送
```

```
36 # 1.拉取远程main分支，合并到本地main
37 git pull origin main --allow-unrelated-histories
38
39 Ctrl + S保存后关闭
40
41 # 2.合并完成，再次推送
42 git push -u origin main
```

```
lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test
$ git init
Initialized empty Git repository in E:/para/PAC26/test/.git/

lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (master)
$ git config --global user.name "zhanghanxi133"

lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (master)
$ git config --global user.email "2956901524@qq.com"

lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (master)
$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    indexer_mqaz_logits/

nothing added to commit but untracked files present (use "git add" to track)

lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (master)
$ git add.
git: 'add.' is not a git command. See 'git --help'.

The most similar command is
    add

lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (master)
$ git add .
warning: in the working copy of 'indexer_mqaz_logits/Tensor.h', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/allocator.h', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/base.h', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/indexer_mqa_logits_base/Tensor.h', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/indexer_mqa_logits_base/allocator.h', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/indexer_mqa_logits_base/indexer_mqa_logits.h', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/indexer_mqa_logits_base/main.cpp', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/indexer_mqa_logits_base/ref_mqa_logits.h', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/indexer_mqa_logits_base/test.sh', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/indexer_mqa_logits_base/testcase.h', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/indexer_mqa_logits_base/utis.h', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/main.cpp', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/make.sh', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/ref_mqa_logits.h', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/result.out', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/test.sh', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/testcase.h', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'indexer_mqaz_logits/utis.h', LF will be replaced by CRLF the next time Git touches it
```

```
lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (master)
$ git commit -m "Add PAC26"
[master (root-commit) 1b7dfbd] Add PAC26
23 files changed, 3313 insertions(+)
create mode 100644 indexer_mqaz_logits/README.md
create mode 100644 indexer_mqaz_logits/Tensor.h
create mode 100644 indexer_mqaz_logits/allocator.h
create mode 100644 indexer_mqaz_logits/base.h
create mode 100644 indexer_mqaz_logits/baseline.out
create mode 100644 indexer_mqaz_logits/indexer_mqa_logits.h
create mode 100644 indexer_mqaz_logits/indexer_mqa_logits_base/README.md
create mode 100644 indexer_mqaz_logits/indexer_mqa_logits_base/Tensor.h
create mode 100644 indexer_mqaz_logits/indexer_mqa_logits_base/allocator.h
create mode 100644 indexer_mqaz_logits/indexer_mqa_logits_base/baseline.out
create mode 100644 indexer_mqaz_logits/indexer_mqa_logits_base/indexer_mqa_logits.h
create mode 100644 indexer_mqaz_logits/indexer_mqa_logits_base/main.cpp
create mode 100644 indexer_mqaz_logits/indexer_mqa_logits_base/ref_mqa_logits.h
create mode 100644 indexer_mqaz_logits/indexer_mqa_logits_base/testcase.h
create mode 100644 indexer_mqaz_logits/indexer_mqa_logits_base/utlis.h
create mode 100644 indexer_mqaz_logits/main.cpp
create mode 100644 indexer_mqaz_logits/make.sh
create mode 100644 indexer_mqaz_logits/ref_mqa_logits.h
create mode 100644 indexer_mqaz_logits/result.out
create mode 100644 indexer_mqaz_logits/test.sh
create mode 100644 indexer_mqaz_logits/testcase.h
create mode 100644 indexer_mqaz_logits/utlis.h
```

```
lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (master)
$ git remote add origin https://github.com/zhanghanxi133/hpc.git
```

```
lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (master)
$ git branch
* master
```

```
lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (master)
$ git branch -m master main
```

```
lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (main)
$ git push -u origin main
info: please complete authentication in your browser...
To https://github.com/zhanghanxi133/hpc.git
 ! [rejected]        main -> main (fetch first)
error: failed to push some refs to 'https://github.com/zhanghanxi133/hpc.git'
hint: Updates were rejected because the remote contains work that you do not
hint: have locally. This is usually caused by another repository pushing to
hint: the same ref. If you want to integrate the remote changes, use
hint: 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.
```

```
lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (main)
$ git pull origin main --allow-unrelated-histories
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 900 bytes | 150.00 KiB/s, done.
From https://github.com/zhanghanxi133/hpc
 * branch          main      -> FETCH_HEAD
 * [new branch]    main      -> origin/main
Merge made by the 'ort' strategy.
 README.md | 2 ++
1 file changed, 2 insertions(+)
create mode 100644 README.md
```

```
lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (main)
$ git push -u origin main
Enumerating objects: 21, done.
Counting objects: 100% (21/21), done.
Delta compression using up to 18 threads
Compressing objects: 100% (19/19), done.
```

```
lenovo@LAPTOP-VLS8VSV8 MINGW64 /e/para/PAC26/test (main)
$ git push -u origin main
Enumerating objects: 21, done.
Counting objects: 100% (21/21), done.
Delta compression using up to 18 threads
Compressing objects: 100% (19/19), done.
Writing objects: 100% (20/20), 20.70 KiB | 4.14 MiB/s, done.
Total 20 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (3/3), done.
To https://github.com/zhanghanxi133/hpc.git
   09ffc9c..fa88481  main -> main
branch 'main' set up to track 'origin/main'.
```

## 仓库更新

上传【其他目录】的文件 / 文件夹到这个 hpc 仓库：

1. 把别处的文件 / 整个文件夹，复制粘贴到 `E:\para\PAC26\test` 这个文件夹里面（就是你的 git 仓库根目录，能看到 `.git` 隐藏文件夹）。

```
1 | git pull origin main
2 | git add .
3 | git commit -m "本次更新描述"
4 | git push
```

本地文件修改、新增、删除，全部都用这套流程

每一步作用：

1. `git pull origin main`：先把 GitHub 远程最新代码拉到本地，避免别人（或网页端）改了内容导致 push 被拒绝
2. `git add .`：把文件夹里所有改动（修改 / 新增 / 删除）全部纳入暂存
3. `git commit -m "xxx"`：生成本地版本快照，引号写清楚改了什么
4. `git push`：把本地版本上传推送到 GitHub