

- **InfoCenter Settings:** Use this window to upload a new TS7700 IBM Knowledge Center to the cluster's MI.

Note: Although the term *InfoCenter* is still used in the interface of the product, the term *IBM Knowledge Center* is the current correct term.

Security Settings window

Figure 9-72 shows the Security Settings window, which is the entry point to enabling security policies.

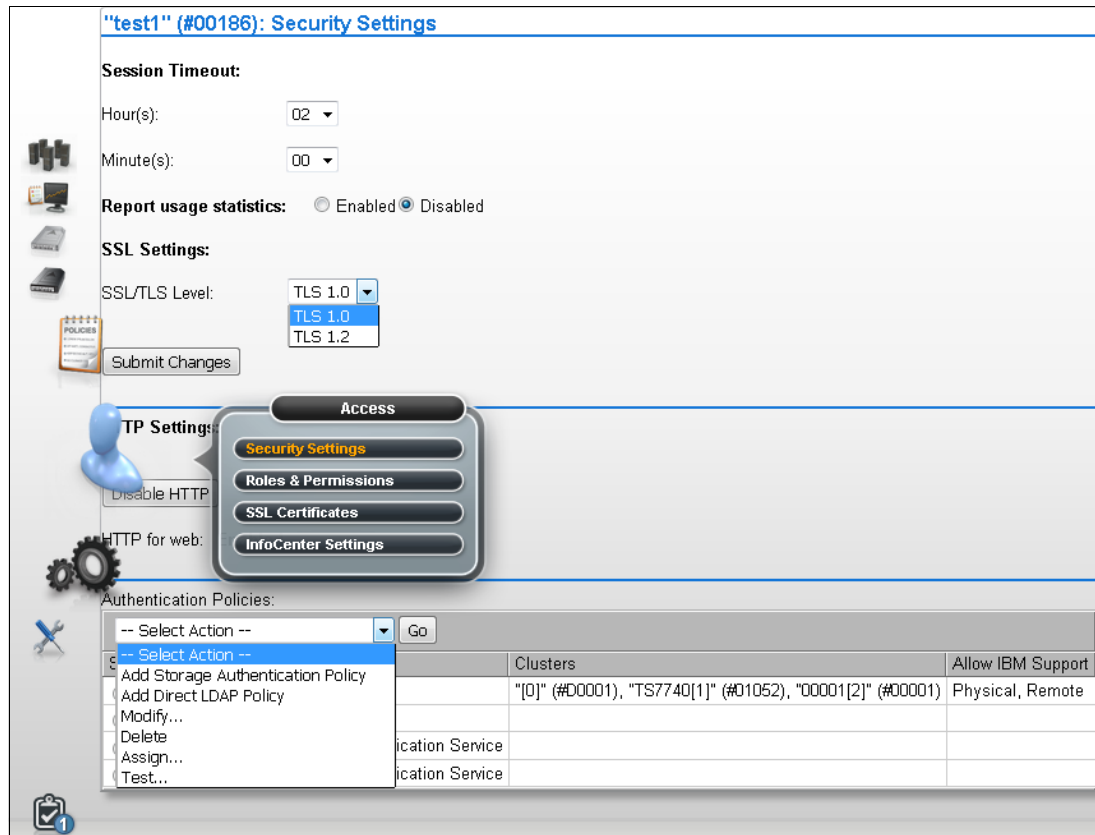


Figure 9-72 TS7700 Security Settings

This page allows you to change the following settings:

- **Session Timeout:** This setting is defined from the Security Settings window. The user can specify the number of hours and minutes that the management interface can be idle before the current session expires and the user is redirected to the login page.

To modify the maximum idle time, select values from the **Hours** and **Minutes** menus and click **Submit Changes**. The following parameters are valid for Hours and Minutes:

- **Hours:** The number of hours the MI can be idle before the current session expires. Possible values for this field are 00 - 23.
- **Minutes:** The number of minutes the MI can be idle before the current session expires. Possible values for this field are 00 - 55, selected in 5-minute increments.

- **SSL settings:** Use this section to set the SSL/TLS level. Two choices are available: TLS 1.0 (transition) and TLS 1.2 (strict). The default setting is TLS 1.0.