[synthetic] One-hot lookup then sequence summation produces the supplied count vect
or.

How does this fixed token sequence become a count vector?

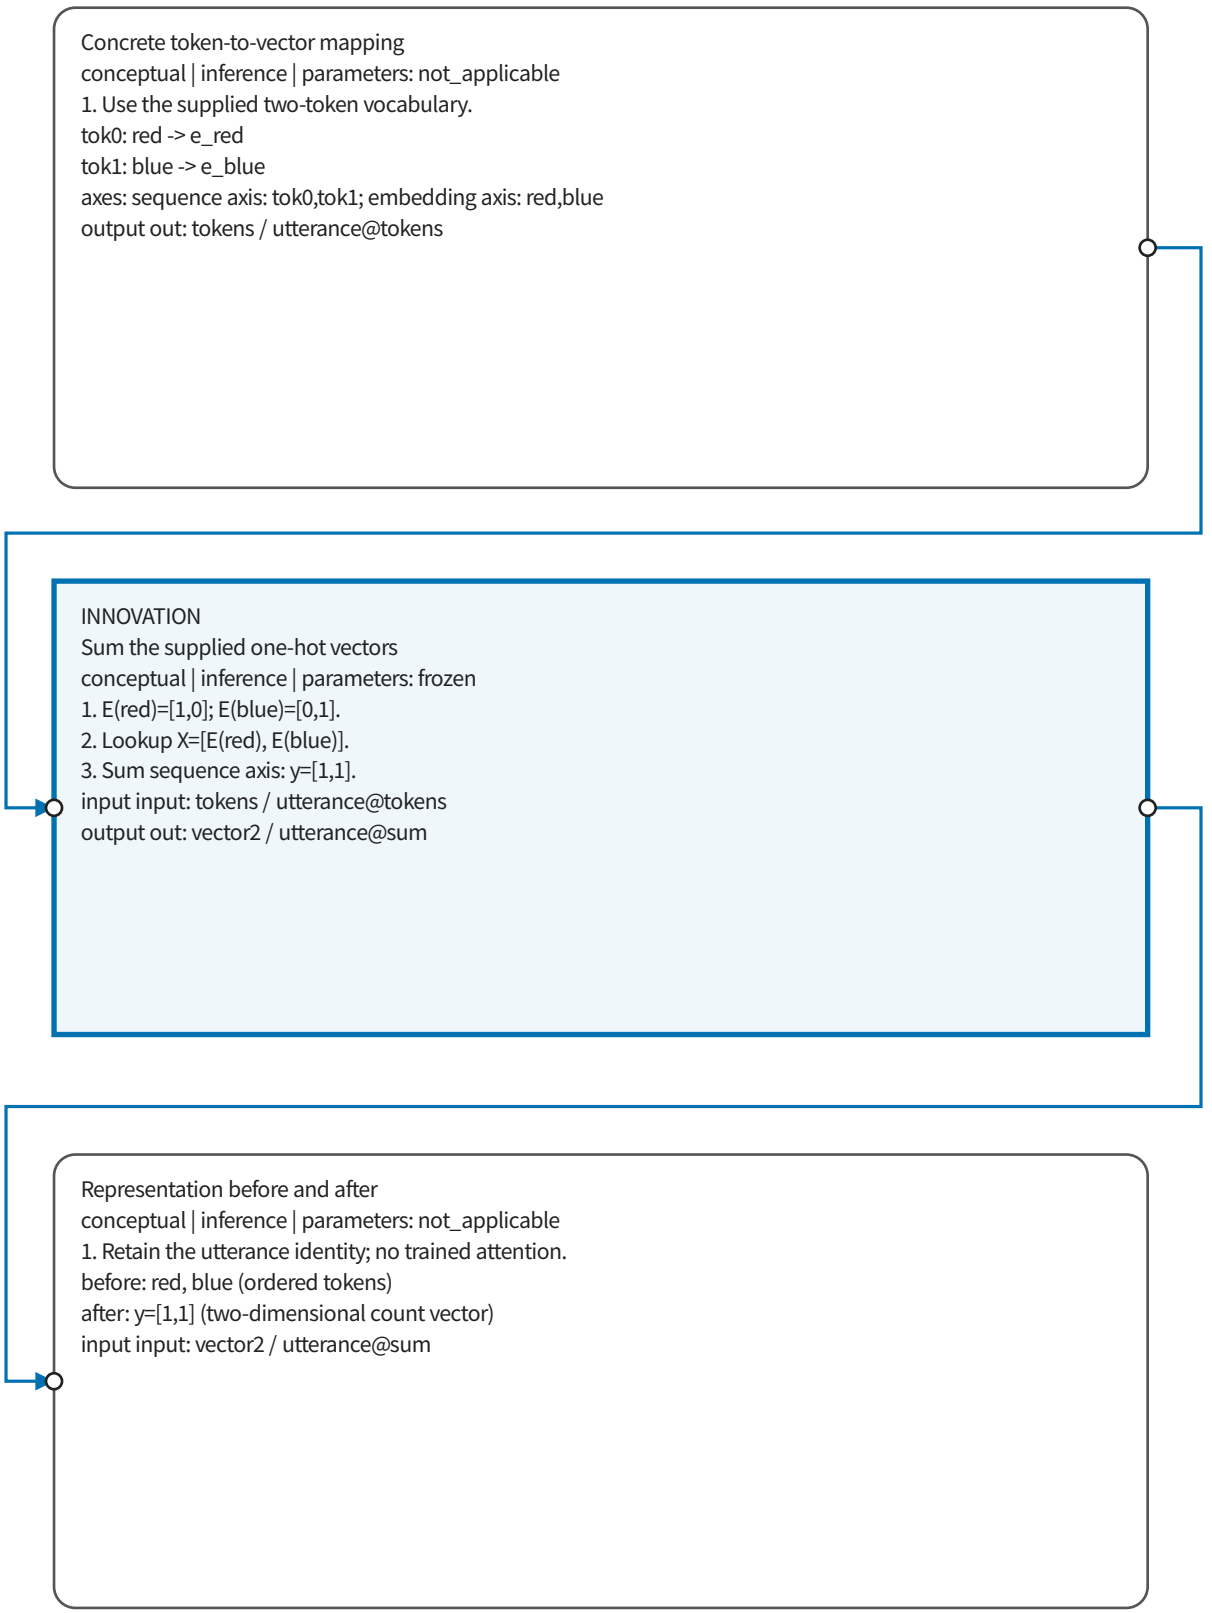

lookup [data]: ordered token IDs; when always

sum [data]: two-dimensional count vector; when always