[synthetic] A penguin counterexample yields an explicit exception without inventing observations.

How does a retained counterexample revise a semantic constraint?

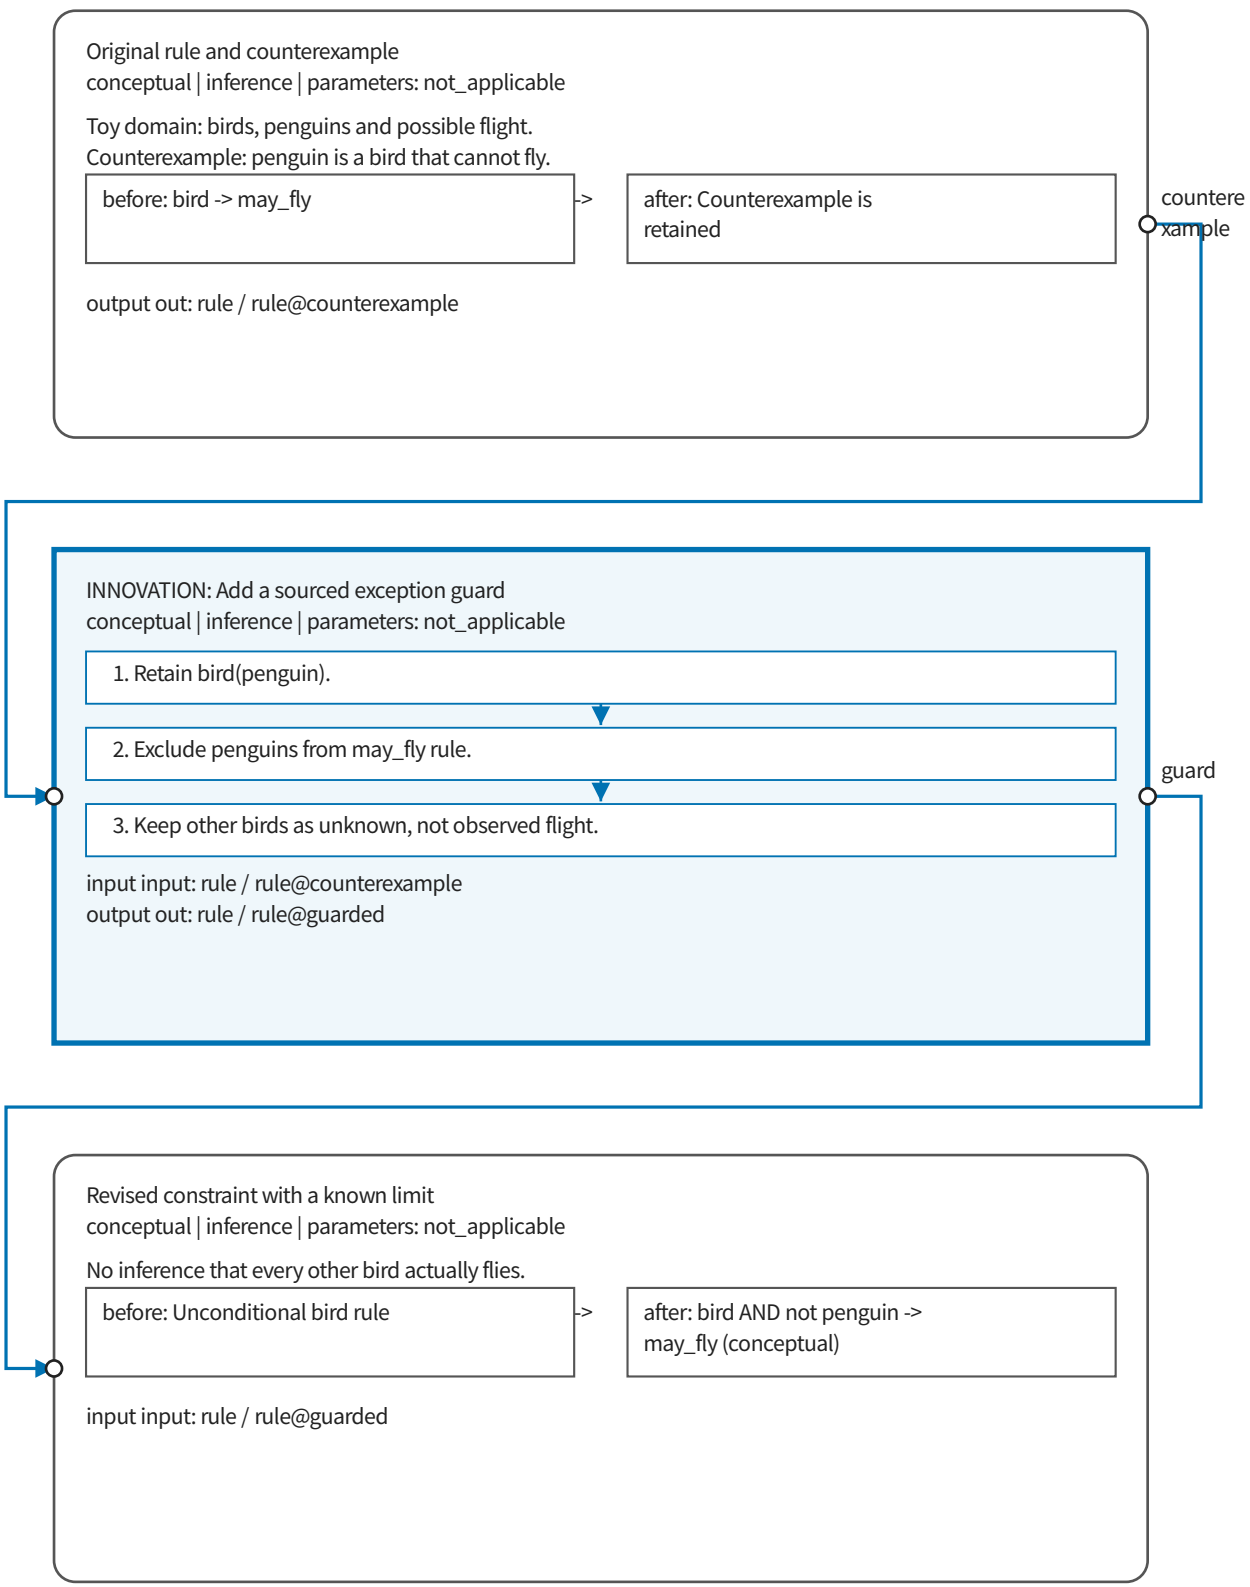

counterexample [data]: original rule plus counterexample; when always

guard [data]: guarded rule; unknown flight retained; when always