



All adjusted intervals include zero

A Identity-disjoint refitting: XGBoost vs random forest

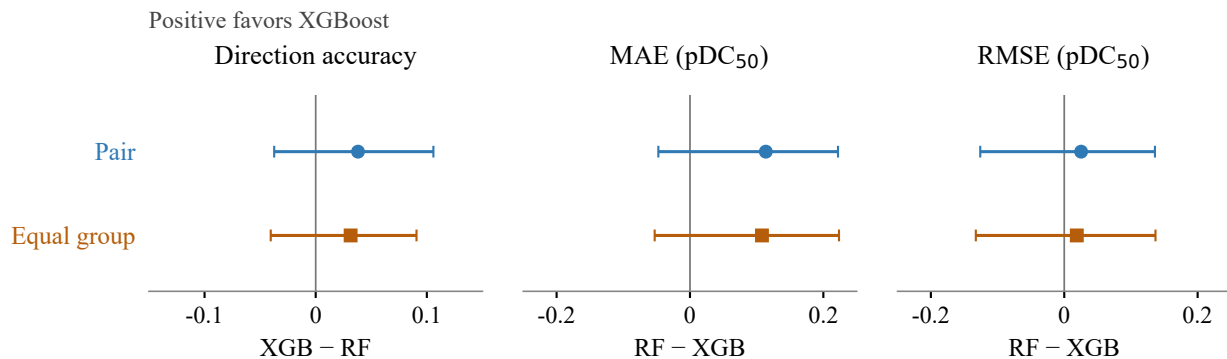

B Folded count vs binary: original splits

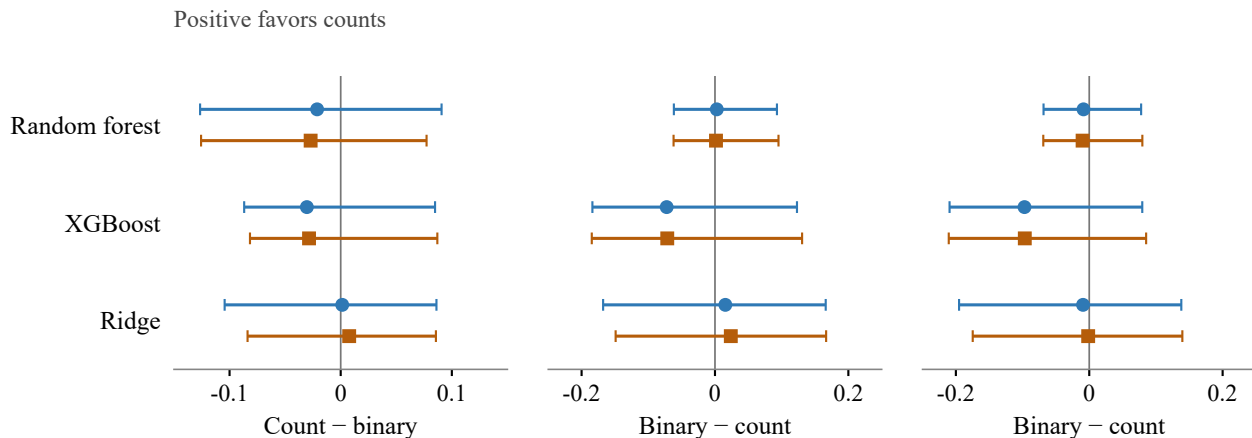

The two rows compare different estimands; differences between rows were not tested.