

MAP: A Map-then-Act Paradigm for Long-Horizon Interactive Agent Reasoning

Yuxin Liu^{1,2*}, Ziang Ye^{1,2}, Yueqing Sun², Mingye Zhu¹, Jinwei Xiao^{2,3},
Zhuowen Han^{2,4}, Qi Gu^{2,†}, Xunliang Cai², Lei Zhang^{1,†}

¹University of Science and Technology of China ²Meituan

³Institution of Automation, Chinese Academy of Sciences ⁴Tianjin University
liuyuxin1010@mail.ustc.edu.cn, leizh23@ustc.edu.cn, guqi03@meituan.com

Abstract

Current interactive LLM agents rely on goal-conditioned stepwise planning, where environmental understanding is acquired reactively during execution rather than established beforehand. This temporal inversion leads to Delayed Environmental Perception: agents must infer environmental constraints through trial-and-error, resulting in an Epistemic Bottleneck that traps them in inefficient failure cycles. Inspired by human affordance perception and cognitive map theory, we propose the **Map-then-Act Paradigm (MAP)**, a plug-and-play framework that shifts environment understanding before execution. MAP consists of three stages: (1) Global Exploration, acquiring environment-general priors; (2) Task-Specific Mapping, constructing a structured cognitive map; and (3) Knowledge-Augmented Execution, solving tasks grounded on the map. Experiments show consistent gains across benchmarks and LLMs. On ARC-AGI-3, MAP enables frontier models to surpass near-zero baseline performance in 22 of 25 game environments. We further introduce MAP-2K, a dataset of map-then-act trajectories, and show that training on it outperforms expert execution traces, suggesting that understanding environments is more fundamental than imitation.

1 Introduction

Large Language Models (LLMs) have rapidly evolved into autonomous agents capable of long-horizon goal completion [10, 11, 25]. Current mainstream paradigms, such as ReAct [41] and Chain-of-Thought (CoT) [48], primarily follow a goal-conditioned stepwise planning framework: the agent reasons over the current observation and immediately selects the next action. Existing progress has largely focused on two directions to optimize this cycle: improving reasoning capability through expert trajectories, parameter optimization, or experience replay [16, 18, 23]; and enhancing memory systems through external trajectory storage or distilled knowledge retrieval to augment decision-making context [8, 26, 34, 37]. Despite their differences, these approaches share a common structural limitation: environmental understanding is coupled with task execution, acquired reactively as a byproduct of acting.

We term this limitation **Delayed Environmental Perception**. In existing paradigms, agents are forced into a temporal inversion where they must “act to understand”—inferring spatial layouts,

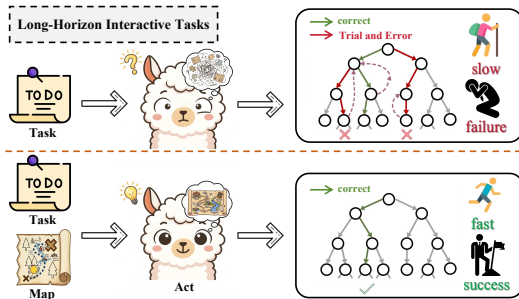


Figure 1: Traditional act-during-think (top) vs. Our map-then-act paradigm (bottom).

*Work done during internship at Meituan. [†]Corresponding author

object-action affordances, and latent constraints only through trial-and-error feedback. Crucially, this is a paradigm-level bottleneck that cannot be resolved by scaling reasoning capabilities alone: a more capable model operating under the same paradigm still perceives the environment only as a byproduct of acting within it. The recently released ARC-AGI-3 benchmark [7] provides compelling evidence of this limitation—even frontier models such as Claude 4.6 achieve near-zero performance in its zero-knowledge interactive environments, confirming that strong reasoning becomes effectively ungrounded when environmental structure is unknown prior to execution.

This delayed perception directly induces an **Epistemic Bottleneck**: without a proactive environmental understanding, agents fall into two characteristic failure modes—Goal Drift, where they become trapped in locally plausible but globally suboptimal behaviors, and Redundant Trial-and-Error, where they repeatedly attempt actions that violate latent environmental logic.

To address this bottleneck, we first draw inspiration from Gibson’s Affordance Theory [9], which suggests that intelligent organisms do not merely “infer” environmental constraints through failure; instead, they perceive action affordances directly from the spatial layout prior to execution. This insight motivates a fundamental paradigm shift: explicitly decoupling environmental understanding from task execution, establishing a global environmental prior before acting rather than acquiring it reactively as a byproduct of execution. We capture this shift as a spatial extension of the “Let’s think step by step” principle [13] to: “**Let’s look around first**”. To operationalize this paradigm shift into a concrete computational framework, we draw on Tolman’s Cognitive Map Theory [29], which demonstrates that organisms navigate unfamiliar environments by first constructing structured internal representations through active exploration, rather than relying on simple stimulus-response associations. This naturally motivates our proposed **Map-then-Act Paradigm (MAP)**, which introduces an explicit `<map>` phase before action execution: `<map> → (<think> [observation] <act>)`. MAP consists of three stages: ❶ Cross-Task Global Exploration, for extracting reusable environment-general priors; ❷ Task-Specific Cognitive Mapping, for constructing structured maps of spatial layouts and object-action affordances; and ❸ Knowledge-Augmented Execution, where actions are grounded on the self-generated map rather than raw observations alone.

We evaluate MAP across diverse interactive benchmarks, including ALFWorld, TextCraft, ScienceWorld, and the ARC-AGI-3 benchmark for fluid intelligence in fully novel environments. Results show two key findings: ❶ MAP consistently improves success rates while reducing interaction steps across tasks without parameter updates; and ❷ after lightweight fine-tuning on **MAP-2K**, a compact dataset of map-then-act trajectories, the resulting **MAP-4B** substantially outperforms counterparts trained on traditional expert execution traces. These results suggest that teaching agents to understand environments is more fundamental than teaching them to imitate solutions.

2 Related Work

2.1 LLM Agents in Long-Horizon Tasks

Recent advances in LLMs have spurred growing interest in building agents for complex, long-horizon tasks [6, 12, 30]. Early prompting-based agents are prone to planning hallucinations and brainless trial-and-error due to their static workflows. Optimization of these methods has focused on two aspects. For reasoning capability, data-driven methods improve decision-making via imitation learning on expert trajectories, while RL-based methods learn from environment interactions through experience replay [5, 21, 33, 36]. For memory management, some works store past trajectories or distill interaction history into external memory to augment decision-making context [19, 24, 39, 40], while others maintain skill libraries that retrieve reusable action primitives or task-specific knowledge to guide execution [2, 3, 17, 44]. However, these approaches remain focused on execution logic and are heavily dependent on external resources, leaving a critical gap in how agents perceive and model the environment itself. In contrast, our proposed MAP emphasizes autonomous environment understanding through self-directed exploration, reducing reliance on external resources and enabling the agent to grow through its own experience.

2.2 Environment Understanding

Effective environment-aware task execution requires agents to maintain an accurate understanding of the environment [15, 43, 47]. Recent studies [7, 14] show that many existing agents operate in a

"blind execution" regime, where failures stem not from limited reasoning ability but from insufficient modeling of the environment’s underlying structure. Even when succeeding via trial-and-error or imitation, agents often fail to capture fundamental properties such as spatial layouts and object affordances, suggesting a lack of structured environment representation.

Existing memory mechanisms—such as long-context windows or key-value memory modules [35, 45, 46, 49]—struggle to form consistent environmental models, as fragmented interaction histories are difficult to organize into structured spatial or physical representations. Related efforts in model-based reinforcement learning aim to learn environment dynamics for planning, but typically rely on parametric simulators or latent dynamics models, making them less compatible with language-based agents and open-ended environments. In contrast, evidence from the VLM domain suggests that explicitly modeling spatial structure and viewpoints improves reasoning performance [32, 42]. Motivated by this, MAP introduces a dedicated mapping stage that constructs a cognitive map M_t capturing spatial layouts and object-action affordances prior to execution.

3 Method

In this section, we introduce **MAP**, which enhances the LLM agent’s performance by decoupling autonomous environment understanding from task execution. We first formalize the "map-then-act" paradigm as a principled alternative to conventional "act-during-think" baselines (§3.1). Building on this, we describe our three-stage architecture for transforming environmental interactions into structured cognitive maps (§3.2). Finally, we introduce an exploration-driven fine-tuning strategy to internalize these capabilities, demonstrating that distilling map-then-act trajectories is more foundational for generalization than mimicking expert execution (§3.3).

3.1 Task Formulation

Our work enhances agent generalization by explicitly decoupling environmental understanding from task execution. We represent the final execution trajectory as $e = (u, a_1, o_1, \dots, a_n)$, where $u \in \mathcal{U}$ is the task instruction, $a \in \mathcal{A}$ is the agent action, and $o \in \mathcal{O}$ is the environmental observation.

In the standard "Act-during-Think" paradigm, the agent π_θ generates actions conditioned solely on the task instruction and interaction history:

$$\pi_\theta(e \mid u) = \prod_{t=1}^n \pi_\theta(a_t \mid u, a_1, o_1, \dots, o_{t-1}). \quad (1)$$

This formulation is fundamentally constrained to the observational distribution $P(a_t \mid o_t)$ —learning *what actions to take* under given observations, but never estimating *how the environment responds*. By Pearl’s do-calculus [20], observational data alone cannot recover the interventional distribution $P(o_{t+1} \mid do(a_t))$, which is the formal root of the Epistemic Bottleneck.

To address this, MAP divides the workflow of π_θ into two stages. In the mapping stage, the agent actively probes the environment via *do(exploration)*, generating exploration trajectories τ_{exp} and distilling them into a cognitive map M that encodes causally grounded environmental knowledge:

$$M \sim \pi_\theta(M \mid u, \tau_{\text{exp}}). \quad (2)$$

In the acting stage, π_θ completes the task conditioned on M :

$$\pi_\theta(e \mid u, M) = \prod_{t=1}^n \pi_\theta(a_t \mid u, M, a_1, o_1, \dots, o_{t-1}) \cdot \pi_\theta(M \mid u, \tau_{\text{exp}}). \quad (3)$$

By conditioning on M —a structured summary of interventional experience *do(exploration)*—rather than observational history alone, MAP transitions the agent from correlational pattern-matching to causally grounded, knowledge-driven reasoning.

3.2 MAP Architecture

In this section, we present the three-stage architecture of MAP. The mapping stage is further decomposed into two lightweight sub-stages, resulting in the three-stage pipeline illustrated in Figure 2.

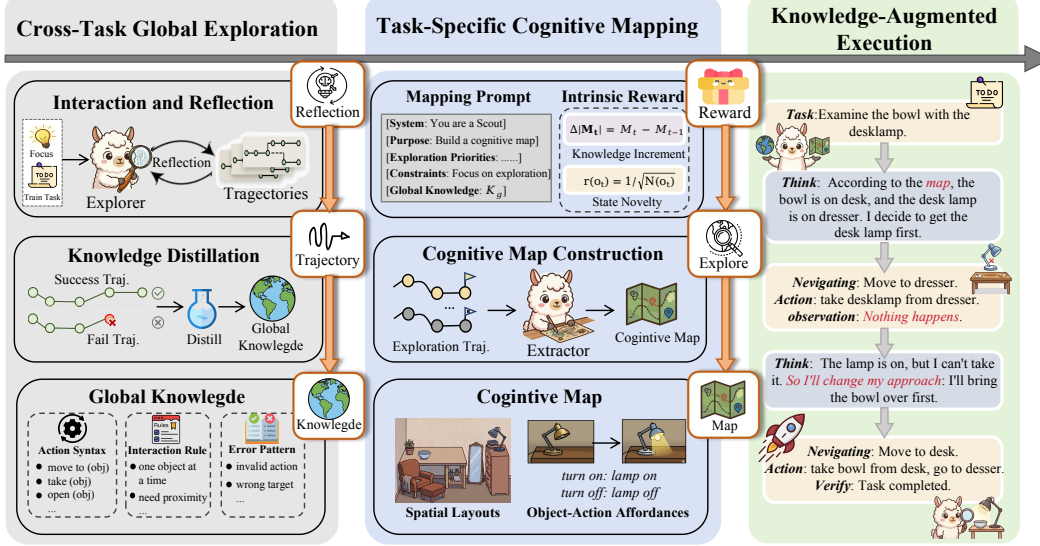


Figure 2: Overview of the MAP framework. **(Left) Cross-Task Global Exploration:** The agent explores training environments to distill cross-task priors K_g capturing general operational rules. **(Middle) Task-Specific Cognitive Mapping:** Guided by K_g and an RPP prompt protocol, the agent constructs a cognitive map M_t encoding spatial layouts and object-action affordances for the current task. **(Right) Knowledge-Augmented Execution:** The agent completes the task conditioned on $\{K_g, M_t\}$, bypassing the Epistemic Bottleneck of conventional stepwise paradigms.

3.2.1 Cross-Task Global Exploration

The goal of this stage is to discover environment-level general rules shared across all tasks, including action syntax, interaction rules, and error patterns, independent of specific task goals. This stage is executed once per environment and produces a persistent knowledge base K_g reused across all subsequent task instances.

Exploration Protocol. Taking $Desc_{env}$ and a small set of manual trajectories F_{manual} as input, the agent π_θ first acts as a *Focus Analyzer* to derive Focus Points (FP): actionable exploration priorities that guide the investigation of interaction patterns, constraints, and conventions (e.g., “Probe whether the environment enforces strict action syntax by testing different command formats and observing which are accepted or rejected”). Guided by FP, the agent then acts as an *Explorer* on T_{train} , executing multiple rounds of “think-act” iterations. Any failure triggers a *Reflector* to perform introspective reflection, with insights incorporated into task-specific reflections ν to assist subsequent retry attempts. The resulting trajectories τ_{exp} , encompassing both successful and failed interactions, are passed to the knowledge distillation phase.

Knowledge Distillation. The agent π_θ distills $\tau_{exp} = (a_1, o_1, \dots, a_N, o_N)$ into structured environment-general rules K_g :

$$K_g = f_{\text{distill}}\left(\tau_{\text{exp}}^{(1)}, \tau_{\text{exp}}^{(2)}, \dots, \tau_{\text{exp}}^{(N)}\right), \quad (4)$$

where f_{distill} extracts universal patterns from actions a_t and observations o_t (details in Appendix D.2), organized as follows:

Structure of Cross-Task Global Knowledge

- **Action Syntax:** valid action commands and their exact format.
- **Interaction Rules:** preconditions and constraints for valid action execution.
- **Error Patterns:** recurring failure modes and their diagnostic signals.

Once constructed, K_g serves as a persistent cognitive prior injected into the system context for all downstream task instances, allowing agents to bypass redundant rule verification and focus on task-specific uncertainties from the outset.

3.2.2 Task-Specific Cognitive Mapping

Guided by the global prior K_g , this stage constructs a task-specific cognitive map M_t by acquiring concrete facts regarding spatial layouts, environmental physics, and object-action affordances tailored to the current environment instance.

Adaptive Exploration. We define an intrinsic reward $r_{\text{intrinsic}}$ to quantify information gain and reduce epistemic uncertainty about the task goal g , consisting of two metrics:

- **Knowledge Increment (Cond_A):** $\Delta|M_t| = |M_t| - |M_{t-1}|$, where $|M_t|$ denotes the number of distinct knowledge entries (e.g., confirmed object locations, discovered affordances) at step t . A positive increment indicates the discovery of new spatial or relational facts; convergence is declared when $\Delta|M_t| = 0$ persists for k consecutive steps.
- **State Novelty (Cond_B):** $r(o_t) = 1/\sqrt{N(o_t)}$, where $N(o_t)$ is the visit count of observation o_t . This reward decays as states are revisited, incentivizing the agent to explore unvisited regions. Convergence is declared when $r(o_t)$ falls below threshold ϵ for k consecutive steps.

Dual-Convergence Stopping Criterion. The exploration horizon is dynamically determined by:

$$T_{\text{stop}} = \min\{t \mid (\text{Cond_A}_t \wedge \text{Cond_B}_t \text{ converge}) \vee (t \geq T_{\text{max}})\}. \quad (5)$$

Both conditions must converge simultaneously: Cond_A ensures map completeness, while Cond_B ensures exploration diversity. Requiring both prevents premature termination, as an agent may stop discovering new facts while still traversing novel regions, or vice versa. A detailed analysis is provided in Appendix B.1.

Task Mapping Prompt Skeleton. We design a structured Role-Purpose-Priority (RPP) protocol to guide systematic environmental mapping. Prompt skeletons are provided in Appendix E.

Cognitive Map Construction. Upon triggering the stop signal, a Key Information Extractor performs structured analysis of τ_{exp} to generate M_t :

$$M_t = f_{\text{map}}(\tau_{\text{exp}}, u). \quad (6)$$

Structure of Task-Specific Cognitive Map

- **Spatial Layouts:** the structural organization of the environment, including reachable regions, object locations, and their spatial relationships.
- **Object-Action Affordances:** interactable entities and the effects their associated actions produce on the environment.
- **Game Rules (ARC-AGI-3):** environment-specific mechanics and latent rules governing valid interactions.

3.2.3 Knowledge-Augmented Execution

In the final execution stage, the agent applies the dual-layer framework—comprising the global prior K_g and the task-specific cognitive map M_t —enabling proactive, knowledge-driven reasoning. Specifically, at time step t , the action a_t is sampled conditioned on the task instruction u , the cognitive map M_t , the global prior K_g , and the interaction history $h_t = (a_1, o_1, \dots, a_{t-1}, o_{t-1})$:

$$a_t \sim \pi_{\theta}(a_t \mid u, M_t, K_g, h_t). \quad (7)$$

3.3 Internalization via Cognitive Fine-tuning

While inference-time prompting demonstrates the effectiveness of MAP, we further investigate whether such environment-understanding capabilities can be internalized into model parameters. To this end, we propose a teacher-student distillation pipeline to construct **MAP-2K**, where state-of-the-art LLMs (e.g., GPT-4.1, Claude 4.5) execute the MAP pipeline as expert annotators, generating full map-then-act trajectories τ_{MAP} given task instruction u :

$$\tau_{\text{MAP}} = f_{\text{teacher}}(u). \quad (8)$$

To ensure fidelity, the synthetic trajectories undergo a rigorous ground-truth alignment check against the environment engine’s internal state to correct potential hallucinations.

We then fine-tune the student model π_θ on MAP-2K. For a map-then-act trajectory $\tau_{\text{MAP}} = (a_1, o_1, \dots, a_N, o_N)$, we minimize:

$$\mathcal{L}_{\text{MAP}} = - \sum_{t=1}^N \log \pi_\theta(a_t \mid o_{<t}, a_{<t}), \quad (9)$$

where π_θ is the LLM policy being trained. The loss supervises the full action sequence across stages, directly internalizing both the environment-understanding and task-execution capabilities into π_θ . Unlike traditional tuning that supervises on expert execution traces alone, MAP-2K trains the agent on complete map-then-act trajectories, teaching it to first understand the environment through active exploration and then ground its decisions in structured knowledge, rather than merely memorizing *what* actions to take.

4 Experiment

In this paper, we conduct experiments to answer the following research questions (RQs):

RQ1: Does MAP consistently outperform existing agent paradigms across benchmarks, and does MAP-2K offer superior training signal over expert execution trajectories?

RQ2: Does Mapping enable agents to develop genuine causal understanding of the environment?

RQ3: Is the exploration overhead of MAP’s mapping phase computationally acceptable?

RQ4: Is each stage of MAP individually necessary?

4.1 Experimental Setups

Environments. We evaluate on four benchmarks: ① ALFWorld [27], a household task environment requiring navigation and object manipulation; ② TextCraft [22], a Minecraft-inspired crafting environment with multi-step recipes; ③ ScienceWorld [31], a text-based science task benchmark requiring procedural reasoning; and ④ ARC-AGI-3 [7], a game benchmark of abstract turn-based environments with no explicit rules or goals. Detailed descriptions are provided in Appendix C.1.

Implementation details. To ensure robust evaluation, our training data MAP-2K underwent strict decontamination to prevent repository-level overlap with benchmarks. We fine-tuned the Qwen3-4B-Thinking model [38] using ms-swift on 8 NVIDIA H800 GPUs which referred to as MAP-4B. The learning rate was set to 1×10^{-5} , and training was conducted for 3 epochs. To ensure fair comparison, we constrain all baselines to the same total step budget as MAP.

LLM Backbones. We evaluated a diverse array of models, including Claude, GPT [1], Kimi [28], Minimax [4], Doubao, Deepseek and Qwen [38] series.

Baselines. We compare MAP against three established paradigms: ① Standard ReAct: A goal-driven stepwise planning framework interleaving reasoning and action. ② Map-and-Act (CoMAP): A non-staged variant where environmental mapping and task execution are performed simultaneously (detailed in Appendix G). ③ SFT-Execution (ACT-4B): To ensure a fair comparison, we fine-tuned Qwen3-4B-Thinking on 2K expert execution trajectories using the same configurations as MAP-4B.

4.2 Main Results (RQ1)

We evaluate MAP on two types of benchmarks: **(1) long-horizon interactive benchmarks** (ALFWorld, TextCraft, and ScienceWorld) that test task completion in structured but unfamiliar environments; and **(2) fluid intelligence benchmarks** (ARC-AGI-3) that test adaptation and rule discovery in fully novel environments.

Table 1: Performance comparison on long-horizon interactive benchmarks. $\uparrow_n$ and $\downarrow_n$ indicate performance improvements and degradations relative to the preceding paradigm (CoMAP vs. ReAct and MAP vs. CoMAP).

Model	Alfworld			Textcraft			Sciworld		
	ReAct	CoMAP	MAP	ReAct	CoMAP	MAP	ReAct	CoMAP	MAP
Non-reasoning Models									
Qwen3-4B-Instruct	31.8	39.0 $\uparrow_{7.2}$	61.1 $\uparrow_{22.1}$	31.8	37.1 $\uparrow_{5.3}$	71.9 $\uparrow_{34.8}$	13.9	16.3 $\uparrow_{2.4}$	24.3 $\uparrow_{8.0}$
Qwen3-30B-A3B-Instruct	39.3	52.3 $\uparrow_{13.0}$	62.0 $\uparrow_{9.7}$	56.8	58.6 $\uparrow_{1.8}$	66.6 $\uparrow_{8.0}$	0.5	1.5 $\uparrow_{1.0}$	9.8 $\uparrow_{8.3}$
GPT-4o-0806	76.1	82.3 $\uparrow_{6.2}$	86.6 $\uparrow_{4.3}$	91.6	92.5 $\uparrow_{0.9}$	96.7 $\uparrow_{4.2}$	31.4	32.7 $\uparrow_{1.3}$	38.2 $\uparrow_{5.5}$
GPT-4o-1120	75.2	79.1 $\uparrow_{3.9}$	82.6 $\uparrow_{3.5}$	94.7	96.7 $\uparrow_{2.0}$	99.6 $\uparrow_{2.9}$	41.3	44.8 $\uparrow_{3.5}$	53.3 $\uparrow_{8.5}$
GPT-4o-mini	21.9	31.0 $\uparrow_{9.1}$	46.2 $\uparrow_{15.2}$	46.5	54.2 $\uparrow_{7.7}$	75.6 $\uparrow_{21.4}$	1.6	6.2 $\uparrow_{4.6}$	12.2 $\uparrow_{6.0}$
Reasoning Models									
Qwen3-4B-Thinking	58.5	61.9 $\uparrow_{3.4}$	71.5 $\uparrow_{9.6}$	35.6	37.5 $\uparrow_{1.9}$	59.6 $\uparrow_{22.1}$	1.5	9.2 $\uparrow_{7.7}$	11.4 $\uparrow_{2.2}$
Qwen3-8B-Thinking	69.3	74.6 $\uparrow_{5.3}$	78.0 $\uparrow_{3.4}$	66.4	67.0 $\uparrow_{0.6}$	87.1 $\uparrow_{20.1}$	25.8	28.7 $\uparrow_{2.9}$	32.4 $\uparrow_{3.7}$
Qwen3-32B-Thinking	78.4	80.7 $\uparrow_{2.3}$	84.0 $\uparrow_{3.3}$	82.4	87.7 $\uparrow_{5.3}$	90.4 $\uparrow_{2.7}$	16.1	19.7 $\uparrow_{3.6}$	28.0 $\uparrow_{8.3}$
Kimi-K2-Thinking	89.1	91.1 $\uparrow_{2.0}$	95.0 $\uparrow_{3.9}$	96.8	97.6 $\uparrow_{0.8}$	99.2 $\uparrow_{1.6}$	41.2	43.5 $\uparrow_{2.3}$	46.8 $\uparrow_{3.3}$
Minimax-M2.7	84.5	87.9 $\uparrow_{3.4}$	88.1 $\uparrow_{0.2}$	92.3	92.1 $\downarrow_{0.2}$	96.7 $\uparrow_{4.6}$	51.1	50.2 $\downarrow_{0.9}$	54.2 $\uparrow_{4.0}$
Deepseek-V4-Pro	96.6	97.2 $\uparrow_{0.6}$	99.6 $\uparrow_{2.4}$	98.8	99.2 $\uparrow_{0.4}$	99.5 $\uparrow_{0.3}$	32.3	36.8 $\uparrow_{4.5}$	41.2 $\uparrow_{4.4}$
Doubao-Seed-2.0-Pro	93.1	94.5 $\uparrow_{1.4}$	96.3 $\uparrow_{1.8}$	63.1	65.6 $\uparrow_{2.5}$	69.8 $\uparrow_{4.2}$	42.5	44.1 $\uparrow_{1.6}$	48.9 $\uparrow_{4.8}$
Fine-Tuning Models									
ACT-4B	78.2	80.7 $\uparrow_{2.5}$	84.3 $\uparrow_{3.6}$	70.1	74.5 $\uparrow_{4.4}$	79.4 $\uparrow_{4.9}$	16.9	20.1 $\uparrow_{3.2}$	23.6 $\uparrow_{3.5}$
MAP-4B	87.1	85.6 $\downarrow_{1.5}$	94.1 $\uparrow_{8.5}$	91.2	92.3 $\uparrow_{1.1}$	95.6 $\uparrow_{3.3}$	35.0	37.2 $\uparrow_{2.2}$	40.5 $\uparrow_{3.3}$

Table 2: Performance comparison on ARC-AGI-3 benchmarks. We report both achieved level and success score on Claude 4.6 Opus.

Method	TU93		SB26		VC33		RE86		AR25		WA30	
	Level	Score	Level	Score	Level	Score	Level	Score	Level	Score	Level	Score
ReAct	0	0.00	1	0.19	0	0.00	0	0.00	0	0.00	0	0.00
MAP	4	3.34	3	7.59	3	4.12	3	11.59	3	7.66	2	6.67

4.2.1 Results on Long-Horizon Interactive Benchmarks

Table 1 summarizes the performance of MAP and baselines across ALFWorld, TextCraft, and ScienceWorld. Our analysis reveals two key findings.

Environmental understanding is critical, and staged decoupling further amplifies its benefit.

Across most benchmarks and backbones, performance follows a consistent ordering under comparable token budgets: ReAct < CoMAP < MAP. CoMAP already improves over ReAct, confirming that environmental understanding is essential. However, it consistently falls below MAP, indicating that both *when* and *how* cognitive mapping is performed matter. By separating mapping from execution, MAP enables agents to build a coherent cognitive map before acting.

MAP-2K provides superior training signal over expert execution trajectories. Under identical training settings, MAP-4B substantially outperforms ACT-4B across all benchmarks and surpasses several larger models, validating MAP-2K as a high-quality training source. Unlike expert execution traces, map-then-act trajectories capture environmental understanding rather than surface-level action imitation, suggesting that *teaching agents to understand environments is more foundational than teaching them to complete tasks*.

4.2.2 Results on Fluid Intelligence Benchmarks

We further evaluate MAP on ARC-AGI-3, where agents must explore unknown game worlds without any explicit rules or goals. We adopt Claude 4.6 Opus as the backbone, as it represents the current state-of-the-art in reasoning and execution capability. Under the standard *ReAct* framework, performance remains near-zero across all environments, highlighting the fundamental challenge this benchmark poses to conventional paradigms. In contrast, MAP achieves consistent improvements across 22 out of 25 games (Table 2; full results in Appendix C.2), demonstrating broad generalization to previously unseen environments. These results confirm that the bottleneck lies not in reasoning capability, but in the absence of explicit environmental understanding—a gap that MAP directly addresses through structured pre-execution exploration.

4.3 Environmental Understanding Ability (RQ2)

To answer whether the mapping stage enables agents to develop genuine causal understanding of the environment, we design three complementary experiments.

Map QA Accuracy. We design an offline QA evaluation covering four categories of environment-probing questions (detailed in Appendix C.3): *object locations*, *object-action affordance*, *negative knowledge*, and *task reasoning*. The agent is queried solely based on its constructed M_t and evaluated against ground-truth states extracted from the environment engine. As shown in Figure 3, all models achieve strong accuracy across all four categories, confirming that M_t faithfully captures the underlying structure of the environment prior to execution.

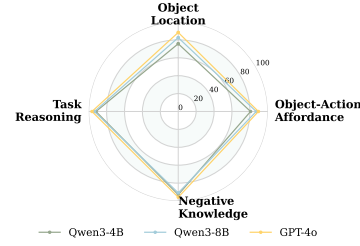


Figure 3: Map QA accuracy evaluated on ALFWorld’s constructed cognitive maps M_t .

Rule Discovery in Novel Environments. We further probe whether structured exploration enables agents to discover underlying rules in completely unknown environments, using ARC-AGI-3 as a testbed. Unlike the previous two experiments where environment rules are predefined, ARC-AGI-3 provides no explicit rules or goals—agents must autonomously infer the world’s underlying logic through interaction. MAP enables Claude 4.6 Opus to progressively advance through multiple levels: by systematically mapping the game environment, the agent constructs a structured understanding of the underlying game mechanics, which in turn guides informed decision-making to drive game progression. Details are provided in Appendix H.2.

Causal Adaptability under Environment Shift.

We introduce controlled mid-episode perturbations by relocating target objects at a random step, to test whether mapping capability enables adaptive replanning rather than relying on memorized action sequences. As shown in Table 3, the untuned base model suffers the largest performance drop under perturbation, highlighting the brittleness of conventional paradigms. Among fine-tuned models, MAP-4B exhibits a substantially smaller drop and recovers more efficiently, consistent with directed re-exploration rather than exhaustive trial-and-error. Detailed metric definitions are provided in Appendix C.4.

Table 3: Comparison under dynamic perturbation on ALFWorld. Base denotes Qwen3-4B-Thinking without fine-tuning.

Model	pass@1	pass@1 _{perturb}	Re-explore Rate(%) ↑	ΔSteps ↓
Base	58.5	45.6 _{↓13.3}	62.8	11.2
ACT-4B	78.2	64.8 _{↓13.4}	69.0	13.0
MAP-4B	87.1	79.5 _{↓7.6}	80.9	7.3

4.4 Computational Efficiency Analysis (RQ3)

Under an equivalent total step budget (mapping steps + acting steps), MAP consistently achieves higher task success rates—results are reported in Table 1. We further analyze two key metrics: interaction turns and token consumption. As shown in Figure 4, while the mapping phase introduces upfront overhead, it pays dividends in execution by eliminating redundant trial-and-error, yielding total costs comparable to or lower than ReAct. These results confirm that MAP achieves superior Epistemic Efficiency: redistributing the interaction budget toward environmental understanding rather than uninformed trial-and-error.

4.5 Ablation Study (RQ4)

To answer whether each stage of MAP is individually necessary, and to further validate key design choices, we conduct ablation studies along three dimensions on ALFWorld using Qwen3-Thinking models at three scales (4B, 8B, and 32B).

Stage Necessity. We ablate each of the three stages by removing them individually: **w/o Stage 1** skips global exploration and proceeds directly to task mapping; **w/o Stage 2** removes task mapping entirely, injecting only global knowledge K_g into the acting stage. As shown in Table 4, both ablations lead to consistent performance drops across all model scales, with w/o Stage 2 incurring the larger degradation, confirming that task mapping is the more critical stage while global exploration provides complementary gains.

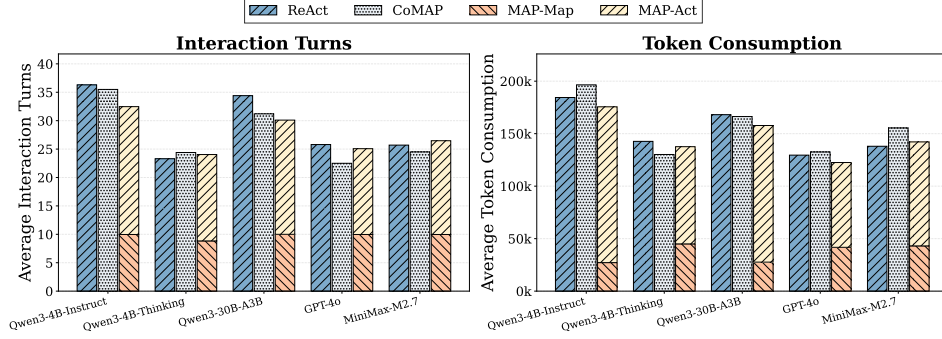


Figure 4: Comparison of interaction turns (left) and token consumption (right) on ALFWorld. Despite upfront mapping overhead, MAP achieves comparable or lower interaction and token cost during execution, indicating that pre-exploration reduces redundancy without additional overhead.

Table 4: Stage necessity ablation on ALFWorld. Table 5: Map Component ablation on ALFWorld.

Setting	4B	8B	32B
Full Stage	71.5	78.0	84.0
w/o Stage 1	64.8 $\downarrow 6.7$	73.8 $\downarrow 4.2$	82.3 $\downarrow 1.7$
w/o Stage 2	55.0 $\downarrow 16.5$	72.1 $\downarrow 5.9$	80.3 $\downarrow 3.7$

Component	4B	8B	32B
Full Cognitive Map	71.5	78.0	84.0
w/o Spatial	56.6 $\downarrow 14.9$	74.3 $\downarrow 3.7$	80.0 $\downarrow 4.0$
w/o Affordance	62.3 $\downarrow 9.2$	76.0 $\downarrow 2.0$	83.3 $\downarrow 0.7$

Map Component Necessity. To identify which components of the cognitive map M_t are most critical, we remove spatial layouts (**w/o Spatial**) and object-action affordances (**w/o Affordance**) individually. As shown in Table 5, removing spatial layouts causes a more pronounced drop, suggesting it provides the foundational scaffolding for task navigation, while removing affordances yields a non-trivial degradation, indicating that action consequence modeling contributes independently—enabling the agent to reason about *what to do* once it knows *where to go*. Both components are thus necessary for effective decision-making.

Exploration Budget Sensitivity. We vary the exploration step budget to examine how map quality scales with exploration effort. As shown in Figure 5, performance generally improves with more exploration steps and stabilizes beyond 10 steps across all model scales. Notably, larger models (32B) are less sensitive to budget variations, maintaining strong performance even with minimal exploration, while smaller models (4B, 8B) benefit more substantially from additional steps. These results suggest that a moderate exploration budget is sufficient for MAP to construct an effective cognitive map, without requiring exhaustive environment traversal.




Figure 5: Effect of exploration budget on pass@1 across three model scales on ALFWorld.

5 Conclusion

In this work, we identified the fundamental limitation of existing agent paradigms—the *epistemic bottleneck*—and proposed MAP, a Map-then-Act paradigm that explicitly decouples environmental understanding from task execution. Through a structured three-stage pipeline and the MAP-2K fine-tuning dataset, MAP consistently outperforms existing paradigms across benchmarks and model scales, while MAP-4B surpasses models of significantly larger size. Beyond three structured environments, MAP enables meaningful progress on ARC-AGI-3 where frontier models score near zero, demonstrating that structured exploration is essential for agent performance in fully unknown environments. These findings suggest that explicit cognitive mapping provides a more robust foundation for adaptive, long-horizon interactive agents.

References

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [2] Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. Self-rag: Learning to retrieve, generate, and critique through self-reflection. In *The Twelfth International Conference on Learning Representations*, 2023.
- [3] Zouying Cao, Jiaji Deng, Li Yu, Weikang Zhou, Zhaoyang Liu, Bolin Ding, and Hai Zhao. Remember me, refine me: A dynamic procedural memory framework for experience-driven agent evolution. *arXiv preprint arXiv:2512.10696*, 2025.
- [4] Aili Chen, Aonian Li, Bangwei Gong, Binyang Jiang, Bo Fei, Bo Yang, Boji Shan, Changqing Yu, Chao Wang, Cheng Zhu, et al. Minimax-m1: Scaling test-time compute efficiently with lightning attention. *arXiv preprint arXiv:2506.13585*, 2025.
- [5] Yuxin Chen, Yu Wang, Yi Zhang, Ziang Ye, Zhengzhou Cai, Yaorui Shi, Qi Gu, Hui Su, Xunliang Cai, Xiang Wang, et al. Learning to self-verify makes language models better reasoners. *arXiv preprint arXiv:2602.07594*, 2026.
- [6] Jinyuan Fang, Yanwen Peng, Xi Zhang, Yingxu Wang, Xinhao Yi, Guibin Zhang, Yi Xu, Bin Wu, Siwei Liu, Zihao Li, et al. A comprehensive survey of self-evolving ai agents: A new paradigm bridging foundation models and lifelong agentic systems. *arXiv preprint arXiv:2508.07407*, 2025.
- [7] ARC Foundation. Arc-agi-3: A new challenge for frontier agentic intelligence. *arXiv preprint arXiv:2603.24621*, 2026.
- [8] Yao Fu, Dong-Ki Kim, Jaekyeom Kim, Sungryull Sohn, Lajanugen Logeswaran, Kyunghoon Bae, and Honglak Lee. Autoguide: Automated generation and selection of context-aware guidelines for large language model agents. *Advances in Neural Information Processing Systems*, 37:119919–119948, 2024.
- [9] James J Gibson. *The ecological approach to visual perception: classic edition*. Psychology press, 2014.
- [10] Izzeddin Gur, Hiroki Furuta, Austin Huang, Mustafa Safdari, Yutaka Matsuo, Douglas Eck, and Aleksandra Faust. A real-world webagent with planning, long context understanding, and program synthesis. *arXiv preprint arXiv:2307.12856*, 2023.
- [11] Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. Constructing a multi-hop qa dataset for comprehensive evaluation of reasoning steps. In *Proceedings of the 28th International Conference on Computational Linguistics*, pp. 6609–6625, 2020.
- [12] Carlos E Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. Swe-bench: Can language models resolve real-world github issues? *arXiv preprint arXiv:2310.06770*, 2023.
- [13] Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. Large language models are zero-shot reasoners. *Advances in neural information processing systems*, 35:22199–22213, 2022.
- [14] Siyuan Liu, Hongbang Yuan, Xinze Li, Ziyue Zhu, Yixin Cao, and Yu-Gang Jiang. What do llm agents know about their world? task2quiz: A paradigm for studying environment understanding. *arXiv preprint arXiv:2601.09503*, 2026.
- [15] Zeyuan Liu, Jeonghye Kim, Xufang Luo, Dongsheng Li, and Yuqing Yang. Exploratory memory-augmented llm agent via hybrid on-and off-policy optimization. *arXiv preprint arXiv:2602.23008*, 2026.
- [16] Yun Luo, Zhen Yang, Fandong Meng, Yafu Li, Jie Zhou, and Yue Zhang. An empirical study of catastrophic forgetting in large language models during continual fine-tuning. *IEEE Transactions on Audio, Speech and Language Processing*, 2025.

- [17] Qirui Mi, Zhijian Ma, Mengyue Yang, Haoxuan Li, Yisen Wang, Haifeng Zhang, and Jun Wang. Procmem: Learning reusable procedural memory from experience via non-parametric ppo for llm agents. *arXiv preprint arXiv:2602.01869*, 2026.
- [18] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- [19] Joon Sung Park, Joseph O’Brien, Carrie Jun Cai, Meredith Ringel Morris, Percy Liang, and Michael S Bernstein. Generative agents: Interactive simulacra of human behavior. In *Proceedings of the 36th annual acm symposium on user interface software and technology*, pp. 1–22, 2023.
- [20] Judea Pearl. Causal diagrams for empirical research (with discussions). In *Probabilistic and causal inference: The works of Judea Pearl*, pp. 255–316. 2022.
- [21] Qi Peng, Jialin Cui, Jiayuan Xie, Yi Cai, and Qing Li. Tree-of-reasoning: Towards complex medical diagnosis via multi-agent reasoning with evidence tree. In *Proceedings of the 33rd ACM International Conference on Multimedia*, pp. 1744–1753, 2025.
- [22] Aditya Sanghi, Rao Fu, Vivian Liu, Karl Willis, Hooman Shayani, Amir Hosein Khasahmadi, Srinath Sridhar, and Daniel Ritchie. Textcraft: Zero-shot generation of high fidelity and diverse shapes from text. 2022.
- [23] Haizhou Shi, Zihao Xu, Hengyi Wang, Weiyi Qin, Wenyuan Wang, Yibin Wang, Zifeng Wang, Sayna Ebrahimi, and Hao Wang. Continual learning of large language models: A comprehensive survey. *ACM Computing Surveys*, 58(5):1–42, 2025.
- [24] Yaorui Shi, Yuxin Chen, Siyuan Wang, Sihang Li, Hengxing Cai, Qi Gu, Xiang Wang, and An Zhang. Look back to reason forward: Revisitable memory for long-context llm agents. *arXiv preprint arXiv:2509.23040*, 2025.
- [25] Zhengliang Shi, Shen Gao, Lingyong Yan, Yue Feng, Xiuyi Chen, Zhumin Chen, Dawei Yin, Suzan Verberne, and Zhaochun Ren. Tool learning in the wild: Empowering language models as automatic tool agents. In *Proceedings of the ACM on Web Conference 2025*, pp. 2222–2237, 2025.
- [26] Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *Advances in neural information processing systems*, 36:8634–8652, 2023.
- [27] Mohit Shridhar, Xingdi Yuan, Marc-Alexandre Côté, Yonatan Bisk, Adam Trischler, and Matthew Hausknecht. Alfworld: Aligning text and embodied environments for interactive learning. *arXiv preprint arXiv:2010.03768*, 2020.
- [28] Kimi Team, Yifan Bai, Yiping Bao, Y Charles, Cheng Chen, Guanduo Chen, Haiting Chen, Huarong Chen, Jiahao Chen, Ningxin Chen, et al. Kimi k2: Open agentic intelligence. *arXiv preprint arXiv:2507.20534*, 2025.
- [29] Edward C Tolman. Cognitive maps in rats and men. *Psychological review*, 55(4):189, 1948.
- [30] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023.
- [31] Ruoyao Wang, Peter Jansen, Marc-Alexandre Côté, and Prithviraj Ammanabrolu. Scienceworld: Is your agent smarter than a 5th grader? In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pp. 11279–11298, 2022.
- [32] Ruoyu Wang, Xinshu Li, Chen Wang, and Lina Yao. Efficient and generalizable environmental understanding for visual navigation. *arXiv preprint arXiv:2506.15377*, 2025.

- [33] Tianxin Wei, Ting-Wei Li, Zhining Liu, Xuying Ning, Ze Yang, Jiaru Zou, Zhichen Zeng, Ruizhong Qiu, Xiao Lin, Dongqi Fu, et al. Agentic reasoning for large language models. *arXiv preprint arXiv:2601.12538*, 2026.
- [34] Peng Xia, Jianwen Chen, Hanyang Wang, Jiaqi Liu, Kaide Zeng, Yu Wang, Siwei Han, Yiyang Zhou, Xujiang Zhao, Haifeng Chen, et al. Skillrl: Evolving agents via recursive skill-augmented reinforcement learning. *arXiv preprint arXiv:2602.08234*, 2026.
- [35] Siyu Xia, Zekun Xu, Jiajun Chai, Wentian Fan, Yan Song, Xiaohan Wang, Guojun Yin, Wei Lin, Haifeng Zhang, and Jun Wang. From experience to strategy: Empowering llm agents with trainable graph memory. *arXiv preprint arXiv:2511.07800*, 2025.
- [36] Zhao Xinjie, Fan Gao, Xingyu Song, Yingjian Chen, Rui Yang, Yanran Fu, Yuyang Wang, Yusuke Iwasawa, Yutaka Matsuo, and Irene Li. Reagent: Reversible multi-agent reasoning for knowledge-enhanced multi-hop qa. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pp. 4067–4089, 2025.
- [37] Wujiang Xu, Zujie Liang, Kai Mei, Hang Gao, Juntao Tan, and Yongfeng Zhang. A-mem: Agentic memory for llm agents. *arXiv preprint arXiv:2502.12110*, 2025.
- [38] An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- [39] Cheng Yang, Xuemeng Yang, Licheng Wen, Daocheng Fu, Jianbiao Mei, Rong Wu, Pinlong Cai, Yufan Shen, Nianchen Deng, Botian Shi, et al. Learning on the job: An experience-driven self-evolving agent for long-horizon tasks. *arXiv preprint arXiv:2510.08002*, 2025.
- [40] Wei Yang, Jinwei Xiao, Hongming Zhang, Qingyang Zhang, Yanna Wang, and Bo Xu. Coarse-to-fine grounded memory for llm agent planning. *arXiv preprint arXiv:2508.15305*, 2025.
- [41] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik R Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. In *The eleventh international conference on learning representations*, 2022.
- [42] Baiqiao Yin, Qineng Wang, Pingyue Zhang, Jianshu Zhang, Kangrui Wang, Zihan Wang, Jieyu Zhang, Keshigeyan Chandrasegaran, Han Liu, Ranjay Krishna, et al. Spatial mental modeling from limited views. In *Structural Priors for Vision Workshop at ICCV’25*, 2025.
- [43] Mert Yuksekgonul, Daniel Kocejka, Xinhao Li, Federico Bianchi, Jed McCaleb, Xiaolong Wang, Jan Kautz, Yejin Choi, James Zou, Carlos Guestrin, et al. Learning to discover at test time. *arXiv preprint arXiv:2601.16175*, 2026.
- [44] Yunpeng Zhai, Shuchang Tao, Cheng Chen, Anni Zou, Ziqian Chen, Qingxu Fu, Shinji Mai, Li Yu, Jiaji Deng, Zouying Cao, et al. Agentevolver: Towards efficient self-evolving agent system. *arXiv preprint arXiv:2511.10395*, 2025.
- [45] Guibin Zhang, Muxin Fu, Guancheng Wan, Miao Yu, Kun Wang, and Shuicheng Yan. G-memory: Tracing hierarchical memory for multi-agent systems. *arXiv preprint arXiv:2506.07398*, 2025.
- [46] Guibin Zhang, Muxin Fu, and Shuicheng Yan. Memgen: Weaving generative latent memory for self-evolving agents. *arXiv preprint arXiv:2509.24704*, 2025.
- [47] Kai Zhang, Xiangchao Chen, Bo Liu, Tianci Xue, Zeyi Liao, Zhihan Liu, Xiyao Wang, Yuting Ning, Zhaorun Chen, Xiaohan Fu, et al. Agent learning via early experience. *arXiv preprint arXiv:2510.08558*, 2025.
- [48] Zhuosheng Zhang, Aston Zhang, Mu Li, and Alex Smola. Automatic chain of thought prompting in large language models. *arXiv preprint arXiv:2210.03493*, 2022.
- [49] Zijian Zhou, Ao Qu, Zhaoxuan Wu, Sunghwan Kim, Alok Prakash, Daniela Rus, Jinhua Zhao, Bryan Kian Hsiang Low, and Paul Pu Liang. Mem1: Learning to synergize memory and reasoning for efficient long-horizon agents. *arXiv preprint arXiv:2506.15841*, 2025.

A Limitations and Future Works

While MAP demonstrates strong performance across diverse interactive reasoning benchmarks, the current framework is primarily validated in text-based environments with action spaces. The cognitive mapping mechanism has not yet been extended to embodied AI settings or multimodal perception scenarios, where agents must construct environmental representations from visual inputs and continuous action spaces. We leave the exploration of MAP in embodied and multimodal domains—such as robotic manipulation and vision-language navigation—as an important direction for future work.

B More Implementation Details

B.1 Dual-Convergence Stopping Criterion Analysis

To validate the dual-convergence stopping criterion empirically, we visualize the step-wise dynamics of Knowledge Increment ($\Delta|M_t|$) and State Novelty ($1/\sqrt{N(o_t)}$) over a representative mapping episode on TextCraft (Figure 6). Specifically, Cond_A is satisfied when $\Delta|M_t|$ approaches zero for $W_k = 3$ consecutive steps, indicating no new spatial or affordance information is being discovered; Cond_B is satisfied when the sliding-window average of $r(o_t)$ (window size $W_n = 5$) drops below $\varepsilon = 0.5$, indicating the agent is predominantly revisiting previously explored states. A minimum exploration floor of $T_{\min} = 3$ steps prevents premature termination, while $T_{\max} = 15$ serves as a safety cap. Both metrics remain high in early steps as the agent rapidly acquires new spatial layouts and object-action affordances, then jointly converge at approximately step 13, at which point T_{stop} is triggered naturally. This confirms that the adaptive stopping criterion correctly identifies the natural saturation point of the mapping process, avoiding both premature termination and redundant over-exploration, thereby allocating the interaction budget efficiently across the mapping phase.

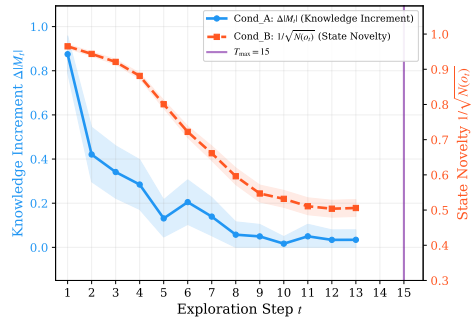


Figure 6: Step-wise dynamics of Knowledge Increment ($\Delta|M_t|$) and State Novelty ($1/\sqrt{N(o_t)}$) during a representative mapping episode on TextCraft.

B.2 MAP-2K Dataset Details

MAP-2K is constructed via a teacher-student distillation pipeline. We employ GPT-4.1 and Claude 4.5 as expert cognitive annotator to execute the MAP exploration pipeline across training task instances. For each instance, the teacher model is deployed under a goal-free exploration prompt and produces an exploration trajectory $\tau_{\text{exp}} = (a_1, o_1, \dots, a_N, o_N)$. To ensure data quality, all synthetic trajectories undergo a rigorous ground-truth alignment check against the environment engine’s internal state to correct potential hallucinations; we filter trajectories by requiring them to exceed minimum thresholds on both spatial coverage and factual accuracy, yielding a clean distillation signal with reduced hallucinated or non-actionable content. The final MAP-2K dataset comprises approximately 2,000 expert exploration trajectories distributed across three environments, as summarized in Table 6. To prevent test set leakage, exploration trajectories are collected exclusively from the training splits of each benchmark, following the standard data splits established in the original environment papers.

Table 6: MAP-2K dataset statistics.

Environment	# Traj.	Avg. Steps	Avg. Tokens(k)
ALFWorld	667	48.8	6.6
TextCraft	667	42.9	5.7
ScienceWorld	667	60.7	8.2
Total	~2,000	50.8	6.8

C Additional Experimental Details

C.1 Environment Setup

We evaluate MAP on three long-horizon interactive benchmarks spanning diverse task structures and environmental complexities.

ALFWorld. ALFWorld is a text-based interactive environment that aligns household tasks with a visually rich 3D simulator, enabling the study of agents capable of both high-level planning and grounded execution. The benchmark comprises six task types: *Pick & Place* (locate and move an object to a target location), *Examine in Light* (find an object and examine it under a light source), *Clean & Place* (clean an object in a sink and place it), *Heat & Place* (heat an object in a microwave and place it), *Cool & Place* (cool an object in a fridge and place it), and *Pick Two & Place* (locate two objects of the same type and move them to a target location). Each task requires a long sequence of correct actions across multiple rooms, posing significant challenges for sequential decision-making. We evaluate on the 134 unseen test games following standard protocol.

TextCraft. TextCraft is a text-based Minecraft-inspired environment where agents must synthesize target items through multi-step crafting recipes. Tasks vary in complexity from single-step crafting to multi-hop synthesis chains requiring the construction of intermediate items, demanding both environmental exploration and compositional planning. We follow the standard evaluation split of 100 test tasks.

ScienceWorld. ScienceWorld is a text-based virtual environment designed to evaluate scientific reasoning and procedural task completion at the level of an elementary school science curriculum. The environment features multiple interconnected locations (e.g., kitchen, workshop, laboratory, greenhouse) populated with over 200 objects possessing diverse physical properties (e.g., temperature, conductivity, state of matter). The underlying simulation models thermodynamics, electrical circuits, chemical reactions, and biological processes, supporting complex state changes and interactions. The benchmark comprises 30 task types spanning 10 science topics, including changing states of matter, understanding life cycles, and building electrical circuits. For each task type, multiple variations are procedurally generated to test generalization. We evaluate on the standard test split of 200 task instances.

ARC-AGI-3. ARC-AGI-3 is an interactive benchmark designed to evaluate agentic intelligence through abstract turn-based game environments structured around a 64×64 grid with 16 possible colors. Unlike conventional benchmarks, agents receive *no explicit rules, goals, or instructions*—they must autonomously infer win conditions and underlying game mechanics through interaction alone. The benchmark evaluates four core capabilities: exploration, world modeling, goal inference, and planning under uncertainty. Performance is measured via Relative Human Action Efficiency (RHAE), which assesses action efficiency relative to human baselines. All environments are human-calibrated to ensure 100% human solvability, yet frontier models score below 1% as of March 2026, making it an ideal testbed for evaluating structured exploration under complete environmental uncertainty. We evaluate on 6 distinct game environments following the standard evaluation protocol.

Step Budget Allocation. For all environments, the total interaction budget is split between the mapping phase (Stage 2) and the acting phase (Stage 3). Specifically, we allocate 10 steps for mapping and 50 steps for acting in ALFWorld, 15 and 50 steps in TextCraft, and 15 and 50 steps in ScienceWorld, respectively. For ARC-AGI-3, given the open-ended nature of the environments and the absence of predefined task goals, we allocate 30 steps for the mapping phase. The global exploration phase (Stage 1) is conducted offline prior to evaluation and does not consume the per-episode budget.

C.2 Full Results on ARC-AGI-3

We report the complete evaluation results of MAP and ReAct (Claude 4.6) across the remaining game environments in ARC-AGI-3 in Table 7. MAP achieves consistent improvements over ReAct in 22 out of 25 games in total, with ReAct scoring near-zero across virtually all environments. The subset of results reported in the main paper (Table 2) was selected to provide a representative overview of performance across diverse game types; the full results here confirm that the improvements observed are broad and consistent rather than limited to a specific subset of games.

Table 7: Full results on the remaining 19 ARC-AGI-3 game environments.

Game	ReAct		MAP		Game	ReAct		MAP	
	Lv.	Sc.	Lv.	Sc.		Lv.	Sc.	Lv.	Sc.
BP35	0	0.00	0	0.00	CD82	0	0.00	2	3.08
CN04	0	0.00	1	4.89	DC22	0	0.00	2	3.95
FT09	0	0.00	2	3.98	G50T	0	0.00	1	3.57
KA59	1	3.57	1	4.75	LF52	2	5.09	2	6.19
LP85	1	2.17	2	2.48	LS20	0	0.00	2	3.50
M0R0	0	0.00	2	4.77	R11L	0	0.00	1	3.27
S5I5	0	0.00	2	7.83	SK48	0	0.00	1	2.05
SP80	1	4.76	2	5.10	SU15	0	0.00	1	3.22
TN36	1	3.57	1	4.57	TR87	0	0.00	0	0.00
SC25	0	0.00	0	0.00					

C.3 Map QA Accuracy

To directly measure whether the mapping stage produces accurate and causally grounded environmental knowledge, we design an offline QA evaluation based on the constructed cognitive map M_t . The evaluation covers four categories of environment-probing questions:

- **Object Location:** queries about the spatial position of a specific object (e.g., “Where is the apple?”), evaluating whether the agent has correctly mapped the spatial layout of the environment.
- **Object-Action Affordance:** queries about the effect of a given action on an object (e.g., “What happens when you open the fridge?”), evaluating whether the agent has correctly captured action consequences during exploration.
- **Negative Knowledge:** queries about the absence of objects in explored locations (e.g., “Is there a knife in the bedroom?”), evaluating whether the agent can correctly report non-existence based on its map.
- **Task Reasoning:** queries about task-relevant decisions derived from the map (e.g., “Which receptacle should the agent visit first to complete the task?”), evaluating whether the map supports downstream planning.

For each question category, ground-truth answers are extracted directly from the environment engine’s internal state. The agent is queried based solely on its constructed M_t , without access to additional interaction. Accuracy is computed as the proportion of correctly answered questions within each category, averaged across all evaluated task instances.

C.4 Causal Adaptability under Environment Shift

To evaluate whether mapping-based training cultivates genuine causal understanding rather than surface-level pattern matching, we introduce controlled mid-episode perturbations: target objects are relocated to alternative positions at a randomly sampled step during task execution, requiring the agent to detect and adapt to the environmental change.

We design three metrics to characterize agent behavior under perturbation:

- **pass@ 1_{perturb} :** Task success rate under perturbation conditions, computed identically to pass@1. A smaller degradation from pass@1 to pass@ 1_{perturb} indicates greater robustness to environmental shifts.
- **Re-exploration Rate:** The proportion of perturbed rollouts in which the agent executes at least one go to action navigating to an alternative location after the perturbation is triggered. This metric reflects whether the agent actively re-explores the environment upon detecting displacement, rather than persisting with invalid actions at the original location.
- **Δ Steps:** The average number of interaction steps from the perturbation point to episode termination (either task success or step budget exhaustion). Formally, for each perturbed rollout:

$$\Delta\text{Steps} = \frac{1}{|\mathcal{R}|} \sum_{r \in \mathcal{R}} (L_r - t_{\text{perturb}}^r - 1), \quad (10)$$

where L_r is the total length of rollout r , t_{perturb}^r is the step index at which the perturbation is triggered, and $\mathcal{R}$ denotes the set of all perturbed rollouts. A smaller ΔSteps indicates that the agent recovers more efficiently after the perturbation, reflecting lower adaptation cost.

The three metrics form a causal chain characterizing the agent’s full recovery process: **pass@1_{perturb}** measures overall robustness, **Re-exploration Rate** captures whether the agent actively seeks the displaced object, and **ΔSteps** quantifies the efficiency of recovery once re-exploration is initiated.

D Global Exploration Prompt

D.1 Focus Points Generation

The Focus Points Generation prompt is used in Stage 1 to guide the agent in analyzing the task environment and deriving actionable exploration priorities prior to interaction.

Focus Points Generation Prompt

You are a Task Learning Guidance Agent whose mission is to analyze a given task environment and its examples in detail. Your objective is to derive a comprehensive list of actionable focus points that will guide subsequent exploration toward discovering environment-level general rules shared across all tasks.

When producing your analysis, please adhere to the following requirements:

- Your focus points must target the underlying interaction logic of the environment, independent of specific task goals.
- Each focus point should provide clear guidance on what interaction patterns, action syntax, constraints, error patterns, and naming conventions to investigate during exploration.
- The analysis should help identify environment-level general rules that are shared across all tasks, constituting the foundational logic for interacting with this environment.

For each focus point you extract, follow the structure below:

First, explain your reasoning process that led you to identify this focus point. This reasoning should be based on a careful analysis of the provided environment description and example trajectories, focusing on recurring interaction patterns, failure modes, and environment-specific conventions.

Next, present the concrete focus point as a moderately detailed sentence that provides clear guidance for discovering environment- general rules. The focus point must be specific and closely linked to the environment’s interaction logic, but do not use “such as” or “e.g.” to explain it.

Finally, ensure that each pair of reasoning and focus point is numbered sequentially. For example:

Reasoning 1: [Detailed explanation...]

Focus Point 1: [Specific guidance sentence...]

D.2 Knowledge Distillation Prompt

The Knowledge Distillation prompt is used at the end of Stage 1 to distill accumulated exploration trajectories into structured environment-general rules K_g , capturing the underlying interaction logic shared across all tasks.

Knowledge Distillation Prompt

You are an Environment Knowledge Distillation Agent. By examining both successful and failed exploration trajectories of the same environment, your goal is to discover environment-level general rules that are shared across all tasks. These rules should be independent of specific task goals and capture the underlying interaction logic of the environment.

When analyzing the trajectories, focus on the following three dimensions:

- **Action Syntax:** Identify the correct format and structure of valid actions in this environment, including how actions should be phrased and what arguments they require.
- **Interaction Rules:** Identify the preconditions and constraints that govern valid action execution, including sequencing requirements, capacity limits, and physical or logical dependencies between actions.
- **Error Patterns:** Identify recurring failure modes observed across trajectories, including common invalid actions, inapplicable commands, and the environmental constraints that caused them.

The rules you generate must be:

- **Environment-general:** applicable across different task instances in the same environment, not tied to any specific task goal.
- **Grounded:** directly supported by evidence from the provided trajectories. Avoid speculative or unverified statements.
- **Non-redundant:** ensure no two rules overlap in meaning or scope.
- **Concise:** a maximum of 15 rules. Prioritize the most impactful and generalizable patterns.

E Task Mapping Prompt

Stage 2 employs a Role-Purpose-Priority protocol to guide the agent in constructing a task-specific cognitive map M_t prior to execution. The Alfworld, TextCraft and ScienceWorld versions are provided below.

System: You are a **Task-oriented Scout**. Your mission is **NOT** to complete the task, but to systematically explore the environment and construct a structured cognitive map for a downstream executor.

Exploration Priorities:

- ① Map the environmental distribution: identify rooms, locations, and objects present in the environment, along with their spatial relationships and reachability;
- ② Probe action consequences: interact with key objects to observe how the environment responds;
- ③ Record task-relevant affordances: document object states, container contents, and interaction preconditions that are critical for downstream task execution.

Constraints:

- ① **Gather information rather than complete the task;**
- ② Upon failure, diagnose the cause and attempt alternative actions or locations;
- ③ **Ground your exploration in the global knowledge K_g to avoid redundant interactions.**

Figure 7: Task mapping prompt skeleton for ALFWorld (Stage 2).

System: You are a **Task-oriented Scout**. Your mission is **NOT** to craft the target item, but to systematically explore the crafting environment and construct a structured cognitive map for a downstream executor.

Exploration Priorities:

- ① Map the spatial layout of the crafting environment: identify all accessible crafting stations, storage locations, and resource nodes, along with their connectivity and reachability;
- ② Catalog object-action affordances: interact with crafting stations and ingredient sources to observe what actions are applicable and what state changes each action produces;
- ③ Record task-relevant affordance preconditions: document ingredient availability, quantity requirements, and crafting station conditions critical for downstream task execution.

Constraints:

- ① **Gather spatial and affordance information rather than complete the target recipe;**
- ② Upon failure, diagnose the cause and attempt alternative actions or locations;
- ③ **Ground your exploration in the global knowledge K_g to avoid redundant interactions.**

Figure 8: Task mapping prompt skeleton for TextCraft (Stage 2).

System: You are a **Task-oriented Scout**. Your mission is **NOT** to complete the scientific experiment, but to systematically explore the laboratory environment and construct a structured cognitive map for a downstream executor.

Exploration Priorities:

- ❶ Map the spatial layout of the laboratory: identify all accessible locations, their topological connectivity, and the objects and instruments present at each location;
- ❷ Catalog object-action affordances: interact with instruments, substances, and containers to observe what actions are applicable and what physical or chemical state changes each action produces;
- ❸ Record task-relevant affordance preconditions: document object properties, container contents, and instrument conditions critical for downstream experimental execution.

Constraints:

- ❶ **Gather spatial and affordance information rather than complete the experiment;**
- ❷ Upon failure, diagnose the cause and attempt alternative actions or locations;
- ❸ **Ground your exploration in the global knowledge K_g to avoid redundant interactions.**

Figure 9: Task mapping prompt skeleton for ScienceWorld (Stage 2).

F Knowledge-Augmented Execution Prompt

Stage 3 injects both the global knowledge K_g and the task-specific cognitive map M_t into the acting prompt as contextual priors. K_g provides environment-general interaction rules shared across all task instances, while M_t supplies task-specific spatial layouts and object-action affordances constructed during the mapping stage. Together, they enable the agent to perform knowledge-driven execution without additional exploration. The execution prompts for all three environments are provided below.

Knowledge-Augmented Execution Prompt for ALFWorld (Stage 3)

System: You are a helpful assistant controlling a robot in a household environment. Your task is to complete household tasks by navigating rooms and interacting with objects.

Available Actions:

Navigation & Observation: look, inventory, go to (receptacle)

Receptacle Interaction: open/close (receptacle)

Object Interaction: take (object) from (receptacle), move (object) to (receptacle), examine (object)

State Changes: heat/cool/clean (object) with (receptacle), slice (object) with (object)

Global Knowledge [K_g]:

{global_knowledge}

Cognitive Map [M_t]:

{mental_map}

Important Rules:

- Navigate to a location before interacting with objects there;
- You can only hold one object at a time;
- Always check admissible commands to see what actions are currently valid.

Knowledge-Augmented Execution Prompt for TextCraft (Stage 3)

System: You are an expert Minecraft crafter. Your task is to craft a specific target item using the available crafting recipes.

Available Actions:

get [quantity] [item]: Gather raw materials that cannot be crafted

craft [quantity] [item] using [ingredients]: Craft an item using ingredients from your inventory

inventory: Check what items you currently have

Global Knowledge [K_g]:

{global_knowledge}

Cognitive Map [M_t]:

{mental_map}

Important Rules:

- You can only get raw materials that cannot be crafted from other items;
- Craft intermediate items first before crafting the final target;
- Item names use spaces instead of underscores (e.g., oak planks not oak_planks).

Knowledge-Augmented Execution Prompt for ScienceWorld (Stage 3)

System: You are a scientist performing experiments in a virtual science laboratory. Your task is to complete the assigned experiment by interacting with objects in the environment.

Available Actions:

Observation: look around, look at [object], look in [container], inventory

Object Interaction: pick up/put down [object], put [object] in [container], open/close [object]

Device Operation: activate/deactivate [device], use [object] on [object], connect/disconnect [object] to [object]

Substance Handling: pour [substance] in [container], mix [container], dunk [object] in [container]

Navigation: teleport to [room]

Global Knowledge [K_g]:

{global_knowledge}

Cognitive Map [M_t]:

{mental_map}

Important Rules:

- Navigate to the correct location before interacting with objects there;
- Some experiments require specific action sequences (e.g., heat water, then measure temperature);
- Use look around to observe surroundings when entering a new location.

G CoMAP Baseline Prompt

CoMAP (Map-and-Act) is a non-staged variant that shares the same base system prompt as ReAct, but additionally instructs the agent to **simultaneously** maintain an internal world model and execute the task within a single interaction loop—without a dedicated mapping stage. We provide the ALFWorld version as a representative example; TextCraft and ScienceWorld follow an identical structure with environment-specific action spaces.

CoMAP Prompt (ALFWorld)

System: You are a helpful assistant controlling a robot in a household environment. Your task is to complete household tasks by navigating rooms and interacting with objects.

Available Actions:

Navigation & Observation: look, inventory, go to (receptacle)

Receptacle Interaction: open/close (receptacle)

Object Interaction: take (object) from (receptacle), move (object) to (receptacle), examine (object)

State Changes: heat/cool/clean (object) with (receptacle), slice (object) with (object)

Map-and-Act Strategy

As you execute the task, you should **simultaneously** build and maintain an internal world model of the environment. Specifically:

- **Track spatial layout:** Record which receptacles and objects you have observed, and update your mental map as you navigate.
 - **Log object-action affordances:** Note which actions are valid for each object or receptacle encountered, and remember failed attempts to avoid repetition.
 - **Reason from your world model:** Before each action, consult your accumulated environmental knowledge to make informed decisions rather than acting blindly.
 - **Balance mapping and execution:** Do not explore exhaustively before acting—instead, interleave targeted exploration with task progress, updating your world model incrementally.
- Important Rules:**
- Navigate to a location before interacting with objects there;
 - You can only hold one object at a time;
 - Always check admissible commands to see what actions are currently valid.

The key distinction from MAP is that CoMAP does not separate the mapping and execution phases—the agent is required to simultaneously gather environmental knowledge and complete the task within a single interaction loop. This design directly contrasts with MAP’s staged approach, where a dedicated mapping phase constructs an explicit cognitive map M_t prior to task execution, enabling more structured and informed decision-making.

H Case Study

H.1 Long-Horizon Interactive Benchmarks

We present representative trajectories from ALFWorld, TextCraft, and ScienceWorld to illustrate how the two-stage knowledge injection (K_g and M_t) enables efficient task execution.

Action Syntax:
'take <object> from <receptacle>'...

Interaction Rules:
You can only hold ONE object at a time...

Error Patterns: "Nothing happens" on 'heat X with microwave': You must be HOLDING X, not placing it inside first. The correct sequence is: take X → heat X with microwave...

Spatial Layouts:
countertop 3: cup 2, bread 1, houseplant 1
countertop 1: bowl 1, mug 3, soapbottle 1
microwave 1: reachable (closed state)
cabinet 1: reachable (closed state)

Object-Action Affordances:
pick_heat_then_place_in_recep: Pick up an object, heat it, then place it...

You are in the middle of a room. Looking quickly around you, you see a cabinet 6, ..., a cabinet 1, a coffeemachine 1, a countertop 3, a countertop 2, a countertop 1, a drawer 3, ..., a drawer 1, a fridge 1, a garbagecan 1, a microwave 1, a shelf 3, ..., a shelf 1, a sinkbasin 1, a stoveburner 4, ..., a stoveburner 1, and a toaster 1.

Your task is to: **put a hot cup in cabinet.**

ReAct — Goal Drift	MAP (Ours)
> Think: I need to find a cup and heat it. There's a mug on countertop 1 — a mug can be used as a cup. > Action: go to countertop 1 → pick up the mug 3. > Action: go to microwave 1 → open microwave 1 → heat mug 3 with microwave 1 > Action: go to cabinet 1 → move mug 3 to cabinet 1 > Think: Task is complete — the hot mug is in the cabinet. > Action: done → Nothing happens. > Action loop: go to cabinet → done → go to countertop → done ❌ Failed: 37 Steps.	> Think: From the cognitive map, cup 2 is on countertop 3. I need to go directly to get the correct cup, heat it while holding it, then place in cabinet. > Action: go to countertop 3 → You see a cup 2 → You pick up the cup 2. > Action: go to microwave 1 → open microwave 1. heat cup 2 with microwave 1. > Action: go to cabinet 1 → move cup 2 to cabinet 1 → Task completed. ✅ Succeeded: 7 Steps

Figure 10: **Case Study on ALFWorld.** ReAct misidentifies mug as the target cup due to absent environmental priors, falling into a futile action loop and failing after **37 steps**. MAP leverages its pre-constructed cognitive map to precisely locate cup 2, completing the task in just **7 steps** (↑81% efficiency), validating the core value of the “Let’s look around first” paradigm.

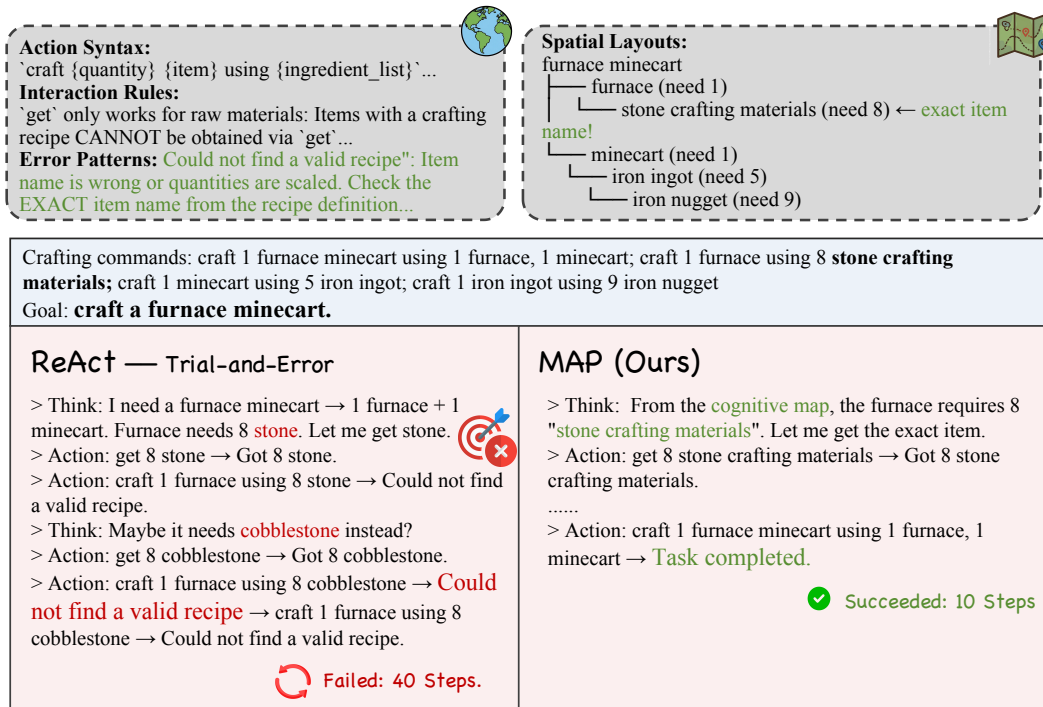


Figure 11: **Case Study on Textcraft.** ReAct repeatedly guesses incorrect ingredient names (stone, cobblestone) due to absent environmental priors, falling into a trial-and-error loop and failing after **40 steps**. MAP precisely identifies the correct ingredient **stone crafting materials** from its pre-constructed cognitive map, completing the task in just **10 steps** (↑75% efficiency).

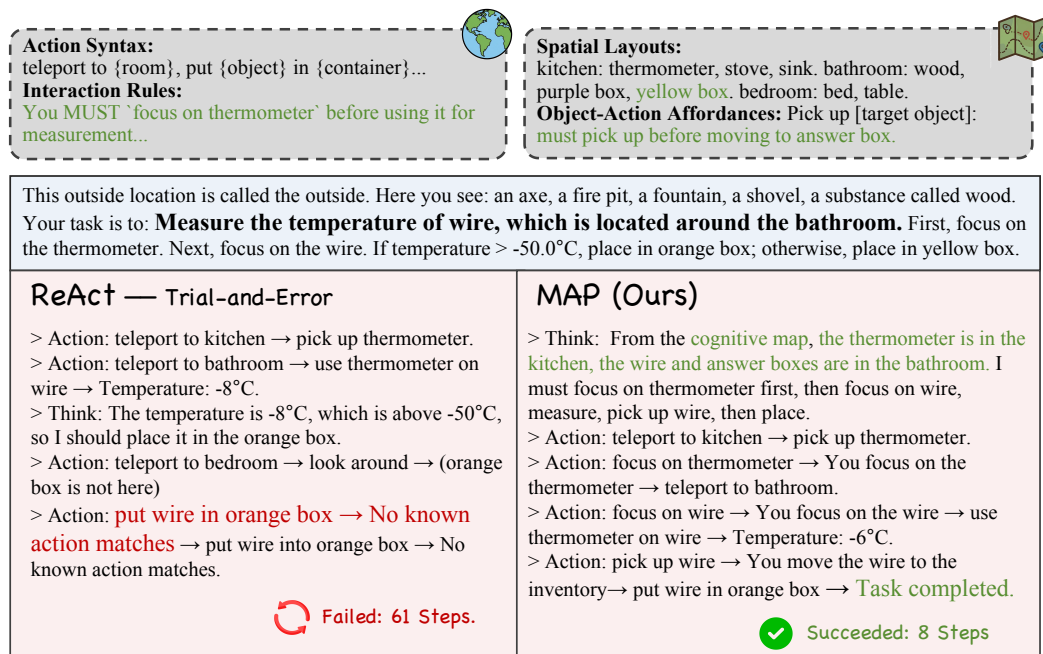


Figure 12: **Case Study on Scienceworld.** ReAct fails to locate the target container and repeatedly triggers invalid actions due to unknown spatial layouts and interaction constraints, failing after **61 steps**. MAP directly retrieves object locations and prerequisite action sequences from its pre-constructed cognitive map, completing the task in just **8 steps** (↑87% efficiency).

Table 8: **Representative Cognitive Maps M_t Constructed by MAP on ARC-AGI-3.**

Game	Environment Layout	Action Effects	Game Rules
Grid Maze Navigation			
<i>TU93</i>	6×6 node maze on 64×64 grid; player (color 9) starts at (0,0); target (color 14) at (5,5); color 2 = corridors, color 5 = walls; bottom row = move counter (color 6, right-to-left).	ACTION1–4: move up/down/left/right by 6px; requires color 2 corridor, else blocked; straight move costs 1 counter pixel; turning costs 2; blocked moves still consume counter.	Reach color 14 to win; counter exhaustion = failure; hazard blocks (color 8/12) move one step per successful player move, bounce at dead ends (period = $2 \times (\text{path} - 1)$); player-hazard collision = GAME_OVER.
Scrolling Belt Alignment Puzzle			
<i>VC33</i>	Upper belt (rows 1–19) and lower belt (rows 24+) separated by fixed walls (color 5); four buttons (color 9) on left edge control belt scrolling; lower belt contains movable objects (color 4 + 14); wall gaps (color 14) = target positions; top row = counter (color 7).	ACTION6 + button coordinates scrolls belt 4px: (2,18) = upper-right, (2,26) = upper-left, (2,38) = lower-left, (2,46) = lower-right; coupled buttons move two objects simultaneously; non-button clicks waste counter.	Belts scroll independently; fixed walls immovable; win = align object with wall gap; floor-as-fuel mechanic: movement consumes color 0 floor tiles, limiting range; buttons in UP/DOWN pairs, each pair controls one element.
Color Sorting Placement Puzzle			
<i>SB26</i>	Top panel (rows 0–7): target color sequence; middle frame: empty slots (color 2), 4 slots at Level 0, 7 slots at Level 2 (dual frame); bottom palette: N shuffled colored blocks (4×4); row 53 = move counter (1 pixel per placement, color 2→3).	ACTION6 + palette block: select block, free; ACTION6 + empty slot: place selected color, costs 1 step; ACTION6 + filled slot: reselect for repositioning, free; ACTION5: submit solution, costs 1 step; ACTION6 (no coords) / ACTION7: no effect.	Match palette blocks to target sequence left-to-right; incorrect placements are repositionable; ACTION5 required to complete level; Level 0: 4-color single frame; Level 2: 7-color dual frame with interleaved slot mapping.

H.2 Fluid Intelligence Benchmarks

We present representative cognitive maps M_t constructed by MAP on three ARC-AGI-3 game instances (Table 8), covering games of fundamentally different mechanics: maze navigation (TU93), belt alignment (VC33), and color sorting (SB26). Across all three instances, MAP autonomously discovers spatial layouts, action effects, and game rules through structured exploration—directly enabling the agent to formulate winning strategies and advance through multiple levels without any explicit instructions or goals.