

LEARNING FROM FAILURES: CORRECTION-ORIENTED POLICY OPTIMIZATION WITH VERIFIABLE REWARDS

Mengjie Ren^{1,2}, Jie Lou³, Boxi Cao¹, Xueru Wen^{1,2}, Hongyu Lin¹, Xianpei Han¹, Le Sun¹, Xing Yu³, Yaojie Lu¹

¹Chinese Information Processing Laboratory, Institute of Software, Chinese Academy of Sciences

²University of Chinese Academy of Sciences

³Xiaohongshu Inc.

ABSTRACT

Reinforcement Learning with Verifiable Rewards (RLVR) has emerged as an effective paradigm for improving the reasoning capabilities of large language models. However, RLVR training is often hindered by sparse binary rewards and weak credit assignment, resulting in ambiguous optimization signals and underutilization of the useful information embedded in failed trajectories. To address this challenge, we propose *Correction-Oriented Policy Optimization* (CIPO), a simple and effective extension to RLVR that converts on-policy failed trajectories into correction-oriented supervision, without relying on any external signals. By jointly optimizing correction samples derived from the model’s own failed attempts together with the standard RLVR objective, CIPO improves learning effectiveness while explicitly enhancing the model’s ability to correct its own errors. Extensive experiments across 11 benchmarks spanning mathematical reasoning and code generation demonstrate that CIPO consistently and significantly outperforms strong baselines in both reasoning and correction performance. Moreover, CIPO yields stronger pass@K gains, indicating that it improves the model’s intrinsic reasoning capacity rather than merely redistributing probability mass over existing correct answers.

1 Introduction

Reinforcement Learning with Verifiable Rewards (RLVR) has emerged as a core paradigm for enhancing the reasoning capabilities of large language models (LLMs), with notable success in mathematical reasoning and code generation [1, 2, 3]. By leveraging automatically verifiable reward signals from on-policy rollouts, RLVR enables scalable training without requiring additional human annotations.

Despite the success, existing RLVR algorithms such as Group Relative Policy Optimization (GRPO) [4] are fundamentally built upon a reinforce-suppress paradigm, where successful trajectories are reinforced while failed ones are uniformly penalized, regardless of their logical proximity to the ground truth [5]. Due to the binary and sparse nature of verifiable rewards, training signals often provide ambiguous optimization guidance and fail to capture the heterogeneous nature of failures, particularly in long-horizon reasoning. As illustrated in Figure 1(a), failed rollouts may arise from fundamentally different error modes, ranging from critical logical flaws and intermediate inconsistencies to minor final-step miscalculations. By treating all failures as identical negative signals, existing approaches merely suppress the likelihood of entire trajectories, without offering explicit guidance on how specific errors can be corrected [6]. Moreover, failed trajectories often contain partially correct reasoning steps that

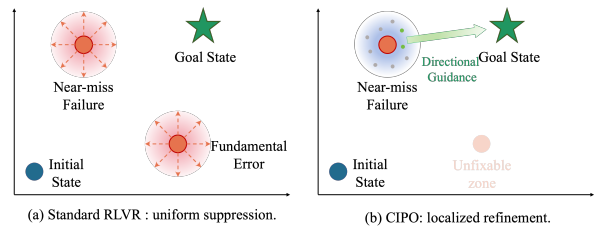


Figure 1: Comparison of how standard RLVR and CIPO exploit failed trajectories. CIPO provides more directional and informative learning signals.

constitute valuable learning signals. Discarding such intermediate structures not only wastes useful supervision but may also hinder effective exploration, ultimately leading to suboptimal generalization [7, 6, 5].

Previous studies have sought to address these challenges through the integration of additional process reward models [8, 9] or LLM-based critics [10]. Nevertheless, these methods are often hampered by the costs of additional manual labeling and computation resources, while the limited capacity of the auxiliary models can introduce noise and undermine generalizability [11, 12]. More recently, such as SDPO [5], leverages environmental feedback or self-generated trajectories to construct a feedback-conditioned teacher and derive fine-grained supervision from distributional discrepancies. However, these methods rely on reliable feedback signals and reflective capabilities that are often limited in weaker models. Moreover, its generalization has been criticized for suppressing epistemic uncertainty, thereby undermining robust reasoning [13]. Consequently, there is an urgent need for a task-agnostic solution that addresses these challenges without requiring additional external supervision signals.

To this end, we propose *Correction-Oriented Policy Optimization* (CIPO), a systematic extension within the RLVR paradigm without requiring any external information. The core idea of CIPO is to transform on-policy failed trajectories from mere objects of penalty into exploitable supervisory signals. Specifically, in figure 2, during each policy update, we construct correction pairs from failed trajectories by conditioning the model on the original prompt together with its own erroneous output, and then sampling refined solutions. This correction objective is then jointly optimized with the standard GRPO objective. Since all correction samples are derived from the model’s own on-policy failures without additional human annotation, CIPO ensures strict consistency between the training and inference distributions. Furthermore, to prevent policy degradation caused by naively incorporating all failed trajectories into training, we integrate an adaptive mechanism that dynamically balances the proportion of successful versus failed trajectories, along with risk-aversion reward shaping. Moreover, we design a rollout preference strategy based on on-policy sampling accuracy to ensure a sustained and informative training signal. These designs enable CIPO to effectively exploit the information contained in failed samples while preserving the original advantages of RLVR.

Intuitively, as illustrated in Figure 1, CIPO improves RLVR from two complementary perspectives. First, the correction objective provides learning signals with stronger directionality. Crucially, this process differentiates failure modes by sampling in the local neighborhood of erroneous trajectories: a “near-miss” attempt (e.g., simple final-step calculation errors) has a much higher probability of yielding correct solutions during refinement sampling than a fundamentally flawed one. By naturally leveraging these varying rectification probabilities, CIPO extracts richer, denser signals from failures, reducing gradient ambiguity. Second, CIPO explicitly trains the model’s correction capability, generating correct solutions conditioned on its own erroneous attempts. This enables our trained model not only to improve its reasoning ability but also to acquire stronger error-correction skills, thereby extending its practical applicability to scenarios such as debugging and refinement.

We conduct extensive experiments across 11 representative benchmarks spanning mathematical reasoning and code generation. Results show that CIPO consistently improves both reasoning and error-correction performance over strong baselines. For correction, Seed-Coder-8B [14] trained with CIPO achieves a 7.63% gain on DebugBench [15], reaching performance comparable to Claude-4-sonnet [16] and surpassing GRPO. For reasoning, Qwen-3-4B [17] trained with CIPO improves average accuracy by 17.56% across six mathematical benchmarks, outperforming GRPO by 4.55%. Additionally, CIPO yields higher pass@K, suggesting that it goes beyond simple probability concentration, thereby enhancing intrinsic reasoning [6]. In summary, our contributions are:

- We revisit the role of failed trajectories in RLVR and investigate how they can be transformed from sparse negative feedback into useful correction-oriented supervision.
- We propose CIPO, a correction-oriented extension for RLVR that constructs correction samples from on-policy failed trajectories without additional annotations.
- Extensive experiments across 11 benchmarks demonstrate that CIPO consistently outperforms strong baselines in both reasoning and correction tasks, with further gains in pass@K metrics indicating genuine expansion of reasoning capabilities rather than probability redistribution.

2 Preliminaries

In this section, we briefly introduce RLVR and review GRPO, a representative algorithm in this paradigm.

2.1 Reinforcement Learning with Verifiable Rewards

RLVR is a paradigm tailored for LLM reasoning tasks where the validity of generated outputs can be automatically verified—for instance, checking the final answer in mathematical reasoning or functional execution in code generation.

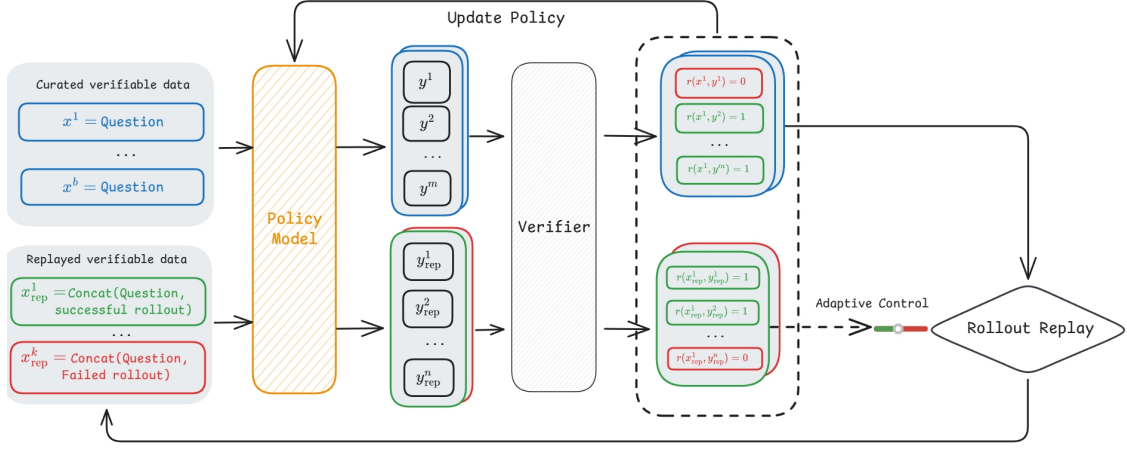


Figure 2: The overall framework of CIPO. First, we generate rollouts for the curated data via the policy model and verify their correctness. Subsequently, we construct replayed samples using a template governed by an adaptive mechanism, which dynamically adjusts the ratio of successful to failed rollouts in the replay. We then generate and verify rollouts for this replayed data. Finally, we perform RL on the rollouts from both the replayed and original samples.

Given a prompt $x \sim \mathcal{D}$, a policy π_θ generates a rollout y autoregressively and receives a binary reward $R(x, y) \in \{0, 1\}$. The objective of RLVR is to maximize the expected reward:

$$\max_{\theta} \mathbb{E}_{x \sim \mathcal{D}, y \sim \pi_\theta(\cdot|x)} [R(x, y)].$$

Due to the sparse and sequence-level nature of verifiable rewards, policy optimization in RLVR typically relies on sampling-based gradient estimators.

2.2 Group Relative Policy Optimization

GRPO is designed to stabilize training under sparse binary rewards without requiring a value model. For each prompt x , GRPO samples a group of N trajectories $\{y_i\}_{i=1}^N$ from the current policy and evaluates their rewards $\{r_i\}_{i=1}^N$. GRPO computes a normalized relative advantage within each group:

$$A_i = \frac{r_i - \mu_r}{\sigma_r}, \quad \mu_r = \frac{1}{N} \sum_{j=1}^N r_j,$$

where σ_r denotes the standard deviation of rewards in the group. The policy is updated by reinforcing trajectories with positive advantages and suppressing those with negative advantages.

Under this formulation, successful trajectories are reinforced relative to the group mean. However, failed trajectories receive uniformly negative advantages whenever successful trajectories exist in the group, regardless of their specific error modes or potential partial correctness.

3 Correction-Oriented Policy Optimization

To address the aforementioned limitations of current RLVR methods, we propose CIPO, which transforms on-policy failed trajectories from mere objects of penalty into exploitable supervisory signals. In this section, we first introduce the overall procedure of CIPO (§3.1), then describe two key strategies designed to enhance training stability and efficiency: adaptive replay with risk-averse shaping (§3.2) and difficulty-aware trajectory preference (§3.3). The core algorithm is outlined in Appendix A.

3.1 Overall Procedure

The overall framework of CIPO, illustrated in Figure 2, extends standard RLVR by establishing an iterative cycle of generation and *correction-oriented replay*. At each training step t , we optimize the policy π_θ using two data streams: (1) **Base Stream**: Standard on-policy rollouts y_i generated from original queries $x \sim \mathcal{D}$; (2) **Correction Stream**:

Refinement rollouts y'_i generated by conditioning the policy on the original query and a previous trajectory y (i.e., prompts $x_{\text{rep}} = \text{Concat}(x, y)$; the concatenation template is detailed in Appendix A.3).

From Suppression to Directional Guidance. Standard RLVR methods (e.g., GRPO) inefficiently treat all failures with uniform negative suppression, providing no information on *how* to improve. CIPO transforms these failures into informative anchors. By successfully refining a specific error y_{fail} into a correct solution y' , the model establishes a distinct gradient path connecting the failure mode to the goal state as shown in Figure 1(b). This converts ambiguous suppression signals into precise directional guidance. However, indiscriminately training on all failed trajectories introduces severe distribution shift and learning inefficiencies. To mitigate these risks, we introduce two main strategic mechanisms.

3.2 Adaptive Replay with Risk-Averse Shaping

To prevent policy degradation caused by naively incorporating all failed trajectories into training, we propose two complementary mechanisms for stable and efficient learning: *adaptive replay ratio*, which dynamically adjusts the mixture of successful and failed trajectories, and *risk-averse reward shaping*, which explicitly penalizes capability regressions.

Adaptive Replay Ratio. To balance learning from failed trajectories with retaining previously acquired capabilities, we maintain a dynamic replay ratio $\rho_t \in [\rho_{\min}, \rho_{\max}]$ for mixing successful and failed trajectories. This ratio is adjusted according to the model’s recent retention performance on recycled successful samples: when performance degrades or continues to decline, we increase the replay fraction of successful trajectories; when performance remains stable and high, we allow more emphasis on failed trajectories. This yields a simple feedback-based replay mechanism, with the full update rule deferred to Appendix A.2.

Risk-Averse Reward Shaping. Inspired by risk-sensitive reinforcement learning [18], we introduce an asymmetric penalty mechanism to impose a stronger constraint against capability regressions. Although adaptive mixing can adjust the correctness distribution of replayed rollouts, it does not directly penalize the following failure mode: the model is conditioned on a correct trajectory yet generates an incorrect response. To mitigate this issue, we impose an additional penalty on “correct $\rightarrow$ incorrect” transitions:

$$R_{\text{risk}}(x, y, y') = R(x, y') - \lambda_{\text{risk}} \cdot \mathbb{I}[R(x, y) = 1 \wedge R(x, y') = 0] \quad (1)$$

where y denotes the conditioning trajectory and y' is the new response. This penalty is activated when the conditioning trajectory is correct but the new response is incorrect. In this way, the objective explicitly suppresses capability regressions, prioritizing the preservation of existing correct behaviors while still enabling the acquisition of new ones.

The combination of adaptive replay and risk-averse reward shaping creates a self-regulating training system: the adaptive controller manages the curriculum at a macro level by adjusting trajectory composition, while the shaped reward provides micro-level guidance by penalizing individual regressions. Together, these mechanisms enable stable learning from failure while preserving the model’s ability to reproduce correct solutions when conditioned on them.

3.3 Difficulty-Aware Trajectories Preference

To improve learning efficiency, we propose a Difficulty-aware Trajectories Preference mechanism that prioritizes replaying prompts with moderate pass rates, thereby ensuring the model focuses on the effective learning window. Previous studies [19, 8, 20, 21] indicate that prompts that are consistently solved (too easy) or consistently failed (too hard) may hinder the learning process or contribute zero gradient signals. Replaying such samples wastes computational resources.

Specifically, we target the medium-difficulty regime. We define the set of prioritized prompts $\mathcal{X}_{\text{med}}$ as:

$$\mathcal{X}_{\text{med}} = \{x \in \mathcal{D} \mid \delta_{\text{low}} \leq \hat{P}(x) \leq \delta_{\text{high}}\} \quad (2)$$

where $\hat{P}(x)$ represents the empirical pass rate, and $\delta_{\text{low}}, \delta_{\text{high}}$ are thresholds. When insufficient medium-difficulty prompts are available, we adopt a fallback strategy that samples from the full distribution $\mathcal{D}$ (see Algorithm 2 in Appendix A).

3.4 Training Objective

The joint objective combines base and correction rollouts:

$$\mathcal{J}_{\text{CIPO}}(\theta) = \mathbb{E}_{x \sim \mathcal{D}} \left[\frac{1}{m} \sum_{i=1}^m A^{(i)} \log \pi_{\theta}(y^{(i)} \mid x) \right] + \lambda \mathbb{E}_{(x, y_c, r_c) \sim \mathcal{X}_{\text{rec}}} \left[\frac{1}{n} \sum_{i=1}^n A'^{(i)} \log \pi_{\theta}(y'^{(i)} \mid x, y_c) \right] \quad (3)$$

Table 1: Main results on mathematical reasoning and code generation benchmarks. Mathematical reasoning is evaluated on Qwen3-4B, and code generation on Seed-Coder-8B.

Method	Math							Code		
	AIME24	AIME25	AMC23	MATH500	Minerva	Olympiad	Avg	LCBv6	LeetCode	Avg
	Avg@32	Avg@32	Avg@32	Avg@1	Avg@1	Avg@1		Avg@10	Avg@1	
Initial	23.54	21.04	66.02	82.20	40.44	47.70	46.82	24.12	69.16	46.64
PRIME	48.65	40.42	85.31	91.20	54.04	57.63	62.88	26.65	69.43	48.04
GRPO _{BS=128}	42.08	35.73	85.55	90.02	47.79	57.63	59.83	29.45	76.23	52.84
GRPO _{BS=256}	40.42	33.44	84.06	90.00	51.10	58.96	59.66	29.32	75.93	52.63
GRPO _{BS=128} ^{m=16}	44.38	37.40	85.70	89.00	53.68	56.44	61.10	29.01	71.08	50.05
CIPO	47.50	44.90	89.61	92.00	52.57	59.70	64.38	30.33	78.21	54.27

where advantages are computed separately within each group, and correction rewards incorporate risk-averse shaping. m and n denote the numbers of sampled responses for base and correction rollouts, respectively, while $\lambda > 0$ controls the relative importance of correction rollouts. The core algorithm is summarized in Algorithm 1.

4 Experiments

4.1 Setup

Training Dataset For mathematical reasoning, following previous works [22], we utilize the DeepScalerR [23], which consists of approximately 40,000 unique mathematics problem-answer pairs. For code generation, we curate verifiable prompts from AM-DeepSeek-Distilled-40M [24] with a primary focus on Python code generation and obtain approximately 370,000 unique items that can be verified by our sandbox server [25].

Baselines and Variants CIPO is orthogonal to existing open-source RL training recipes and can be integrated with various base algorithms. In this work, we instantiate CIPO on top of GRPO and compare against vanilla GRPO under different training budgets as the baseline. We also compare with PRIME [8] under RLOO [26], which adheres to its official implementation. Additionally, to isolate the contribution of online replay, we report an offline variant that only replays trajectories collected at initialization rather than continuously during training.

Implementation We use the instruct mode of Qwen3-4B [17] for math experiments and Seed-Coder-8B [14] for code experiments. We implement our RL training pipeline with the VERL framework [27]. Each batch contains 128 questions, and we generate 8 responses per question during rollout. For rollout sampling, we use temperature = 1.0, top- p = 1.0, and a maximum of 4096 tokens. We set the learning rate to 1×10^{-6} and KL loss coefficient to 1×10^{-4} . All models are trained for 500 steps, and we report results on the final step¹. For CIPO, we set $\lambda = 1$, the correction batch size to 128 and the number of correction rollouts to 8.

Benchmarks We evaluate our method on diverse reasoning benchmarks with a maximum generation length of 8192 tokens. *Math.* We evaluate on AIME24/25 [28, 29], AMC23, MATH500 [30], Minerva [31], and OlympiadBench [32]. For math datasets with fewer than 100 problems, we use temperature sampling (temperature=0.7) with 32 samples per problem and report pass@1. For larger datasets, we use greedy decoding. *Coding.* We evaluate on LiveCodeBench v6 (2024.8–2025.5) [33], and LeetCode problems collected by DebugBench [15], with unit tests from [34] due to the unavailability of automated official submission. Following the official setting, we run LiveCodeBench 10 times with temperature=0.2, and use greedy decoding for LeetCode. *Correction.* We evaluate on CriticBench [35] under three completeness settings using greedy decoding. For DebugBench [15], we use temperature=0.2 and run 8 times.

4.2 Main Results

CIPO yields significant improvements in model reasoning performance. To validate the effectiveness of CIPO in reasoning tasks, we conduct a systematic comparison between CIPO and the strong baseline GRPO on mathematical reasoning and code generation benchmarks. As shown in Table 1, CIPO consistently outperforms GRPO across all reasoning tasks. Specifically, our method achieves an overall accuracy of 64.38% on mathematical reasoning, surpassing GRPO by 4.55%, with even larger gains on the more challenging AIME24 and AIME25 datasets, while also delivering

¹PRIME exhibits early training instability and fail to maintain stable optimization up to 500 steps. We therefore report their best-performing checkpoints for a fair comparison.

Table 2: Pass@K results of competition-level mathematical reasoning on Qwen3-4B and code generation on Seed-Coder-8B.

Model	Math				Code
	AIME24 pass@32	AIME25 pass@32	AMC23 pass@32	Avg	LCBv6 pass@8
Initial	60.00	53.33	97.50	70.28	31.97
GRPO _{BS=128}	76.67	63.33	95.00	78.33	32.33
GRPO _{BS=256}	73.33	70.00	95.00	79.44	32.98
GRPO _{m=16} BS=128	63.33	60.00	92.5	71.94	32.61
CIPO	86.67	70.00	100.00	85.56	37.53

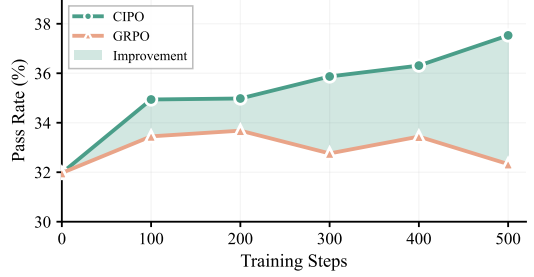


Figure 3: Pass@8 training dynamics on Live-CodeBench v6.

Table 3: Qwen3-4B trained with CIPO demonstrate improved correction and critique capabilities on CriticBench in-domain, with effective generalization to out-of-domain tasks. Comm.: Commonsense; Symb.: Symbolic; Algo.: Algorithmic.

Model	In-Domain		Out-of-Domain			Avg
	Math		Comm.	Symb.	Algo.	
Correction						
Qwen2.5-72B-Instruct	73.93		55.27	92.26	77.30	74.69
Qwen3-32B	74.23		55.00	97.21	76.95	75.85
Initial	67.64		49.07	86.69	71.63	68.75
+GRPO	70.71	↑3.07	48.89	89.78	72.34	70.43
+CIPO	75.38	↑7.74	48.72	92.72	74.47	72.82
Critique						
Qwen2.5-72B-Instruct	89.81		64.94	91.99	63.58	77.58
Qwen3-32B	94.10		67.36	94.41	56.12	78.00
Initial	92.82		58.22	83.68	50.72	71.36
+GRPO	93.87	↑1.05	61.55	90.51	54.79	75.18
+CIPO	94.00	↑1.18	61.74	90.42	55.94	75.53

Table 4: Seed-Coder-8B trained with CIPO achieves consistent improvements in code debugging performance on DebugBench under different completeness settings.

Metric	w/ Intent	w/ Full Intent	w/o Intent	Avg
Claude-Sonnet-4	66.04	68.17	62.52	65.58
Qwen2.5-72B-Instruct	61.65	61.59	60.80	61.35
Qwen3-32B	57.49	57.00	54.38	56.29
Initial	61.88	63.99	56.51	60.79
+GRPO	63.25	66.16	57.97	62.46
+CIPO	65.33 ↑3.45	68.82 ↑4.83	60.82 ↑4.31	64.99 ↑4.20

stable improvements in code generation. Notably, under matched computational budgets, CIPO still outperforms GRPO (BS=256) by 4.72%, which further confirms that the observed gains primarily stem from algorithmic design rather than increased computational resources.

CIPO successfully expands the model’s intrinsic reasoning capabilities, which vanilla GRPO struggles to achieve. To validate the advantage of CIPO in expanding intrinsic reasoning ability, we evaluate the pass@32 metric on competition-style mathematical benchmarks and analyze the training dynamics on code generation tasks. The results demonstrate that CIPO genuinely expands the model’s intrinsic capacity rather than merely reshuffling solutions via sampling. Specifically, under a fixed budget of 32 samples, CIPO outperforms vanilla GRPO by 6.12% on mathematical tasks. Furthermore, on code generation, CIPO maintains a robust, monotonic upward trajectory throughout training, effectively preventing the performance saturation and fluctuation observed in the GRPO baseline, which further indicates that CIPO continuously explores diverse solutions to substantially enhance reasoning capacity.

Table 5: Ablation study of key components of CIPO on Qwen3-4B. Each row shows performance when one component is removed. “w/o on-policy replay” corresponds to the offline variant (CIPO-OFFLINE) described in Section 4.

Model	AIME24	AIME25	AMC23	MATH500	Minerva	Olympiad	Avg
Initial	23.54	21.04	66.02	82.20	40.44	47.70	46.82
CIPO	47.50	44.90	89.61	92.00	52.57	59.70	64.38
w/o on-policy replay _{BS=128}	42.50	38.54	84.45	88.80	52.21	56.30	60.47
w/o on-policy replay _{BS=256}	46.67	35.73	84.77	90.00	50.37	55.11	60.44
w/o Adaptive-control	41.98	34.79	85.00	91.00	51.47	56.89	60.19
w/o risk-aversion	38.23	34.17	82.34	88.80	46.69	54.22	57.41
w/o difficulty-aware preference	44.90	39.06	86.95	90.00	48.53	56.44	60.98

CIPO substantially enhances the model’s correction ability. To validate CIPO’s effectiveness in error correction, we evaluate it on CriticBench and DebugBench. As shown in Table 3 and Table 4, CIPO consistently improves error detection and rectification, significantly outperforming GRPO. Specifically, on CriticBench (Math), CIPO boosts the correction rate by 7.74%, surpassing GRPO by 4.67%. On DebugBench, CIPO achieves a 4.20% gain, outperforming GRPO (+2.53%) and even surpassing Qwen2.5-72B-Instruct while matching Claude-Sonnet-4 [16], with consistent gains across all settings. These results demonstrate that CIPO effectively enhances the model’s ability to repair errors.

The error correction capabilities acquired through CIPO training demonstrate robust cross-scenario generalization to diverse reasoning tasks. To assess the transferability of the learned capabilities, we evaluate the math-trained model on out-of-domain tasks. The results indicate that, despite being trained solely on mathematical data, CIPO generalizes effectively to unseen scenarios. Specifically, as shown in Table 3, the model achieves substantial correction gains in symbolic and algorithmic reasoning. Furthermore, CIPO enhances critique performance across all out-of-domain categories, which further suggests that it fosters general critique and correction capabilities rather than task-specific overfitting, enabling effective transfer to new reasoning environments.

4.3 Ablation Study

We conduct ablation studies to isolate the contributions of CIPO’s design choices: (i) the effect of on-policy correction versus offline replay, and (ii) the necessity of each proposed strategy: adaptive-control, risk-aversion reward shaping and difficulty-aware preference.

On-policy replay drives substantial gains over offline replay. To disentangle the benefit of on-policy correction from merely adding offline data, we compare CIPO against a “step-0 replay” variant that utilizes offline trajectories. As shown in Table 1, CIPO significantly outperforms the variant relying solely on offline data, establishing on-policy replay as a key driver of performance improvement. Specifically, CIPO outperforms the offline variant by an additional 3.91% with consistent gains across all benchmarks, confirming that the improvements stem from the on-policy mechanism’s ability to dynamically correct errors and implicit credit assignment within the current policy distribution, rather than simple data augmentation.

Adaptive-control dynamic replaying balances exploration and exploitation. To demonstrate the importance of adaptively regulating the ratio of successful to failed trajectories in balancing exploration and exploitation, we compare the adaptive-control strategy against a fixed 1:1 replay ratio. The results show that the fixed ratio strategy lags behind the full CIPO model by 4.19%. Specifically, the adaptive mechanism dynamically balances the proportion of successful versus failed trajectories—leveraging failed trajectories for correction learning in early stages while adjusting the proportion later to prevent policy degradation. This ensures a sustained and informative training signal, effectively exploiting the information in failed trajectories without the risk of over-correction associated with fixed ratios.

Risk-averse reward shaping prevents over-correction and capability regression. To validate the necessity of risk-averse reward shaping for model stability, we conduct an ablation study by removing this component. The results reveal that this removal causes the most severe performance degradation, with overall accuracy plummeting by 6.97%. Specifically, performance drops are significant across all datasets (ranging from -3.20% to -10.73%), indicating that the asymmetric reward mechanism effectively balances preventing overfitting with avoiding capability regression, thereby maintaining robust reasoning capabilities while exploring correction strategies.

Difficulty-aware preference improves training efficiency. To verify the role of difficulty-aware preference in optimizing training efficiency, we remove this component and observe model performance. The results show that removing this component leads to consistent performance declines relative to full CIPO across all benchmarks. This

validates the “zone of proximal development” theory: by prioritizing samples at the edge of the model’s capability, the strategy avoids inefficient computation on overly simple or difficult samples.

5 Related Works

Process Supervision To address the ambiguous optimization signals caused by sparse binary rewards in RLVR, prior work introduces process supervision to provide denser feedback by evaluating intermediate steps [36, 37]. A common approach trains a process reward model (PRM) to assess step-level correctness for reinforcement learning or search guidance [9, 38]. Other methods employ LLM critics for corrective feedback [10, 39] or leverage environment feedback to guide credit assignment via teacher model distributions [5]. Recent work such as SDPO further constructs feedback-conditioned teachers from environmental feedback or self-generated trajectories. However, these approaches typically rely on additional annotations or incur substantial computational overhead, and auxiliary models may introduce biases that harm generalization [12, 11, 13]. In contrast, CIPO derives directional signals directly from failed trajectories through correction sampling, eliminating the need for external models or human annotations while preserving the simplicity of the RLVR paradigm.

Learning from Failure Failed trajectories often contain richer signals than uniform suppression can capture. In reinforcement learning, hindsight experience replay (HER) [40] alleviates sparse rewards by replacing intended goals with achieved outcomes. This idea has been extended to LLMs by converting failed interactions into training data via post-hoc rewriting, often using external rewriters to correct invalid responses [41]. Another line of work studies correction-oriented supervised fine-tuning (SFT), where models are trained on critique-and-revise data to improve reasoning [42, 43, 44]. In contrast, CIPO removes the need for relabeling or external rewriters, and integrates correction learning directly into an on-policy RLVR framework, avoiding the distribution shift issues of offline methods.

Self-refinement Recent work improves self-refinement in language models via reinforcement learning, often using multi-turn generation where models iteratively refine their own outputs [45]. These approaches treat failed trajectories as context for subsequent attempts and primarily optimize refined outputs, sometimes at the cost of first-pass performance. Other methods incorporate external feedback to guide correction [46, 47]. However, most operate on a single refinement trajectory per failure, without exploring nearby alternatives. In contrast, CIPO samples around failed trajectories and integrates the resulting signals directly into policy optimization, enabling more informative supervision without requiring multi-turn inference at test time.

6 Conclusion

We introduce CIPO, which transforms on-policy failed trajectories into exploitable supervisory signals for RLVR training. The key insight is that correction naturally differentiates failure modes: near-miss attempts are more likely to yield correct solutions during refinement, enabling richer learning signals from failures. Experiments across 11 benchmarks demonstrate that CIPO achieves significant improvements on both reasoning and correction tasks, with pass@K gains indicating genuine expansion of intrinsic reasoning capabilities.

Impact Statement

This paper presents work whose goal is to advance the field of Machine Learning. There are many potential societal consequences of our work, none of which we feel must be specifically highlighted here.

References

- [1] OpenAI, :, Aaron Jaech, Adam Kalai, Adam Lerer, Adam Richardson, Ahmed El-Kishky, Aiden Low, Alec Helyar, Aleksander Madry, Alex Beutel, Alex Carney, Alex Iftimie, Alex Karpenko, Alex Tachard Passos, Alexander Neitz, Alexander Prokofiev, Alexander Wei, Allison Tam, Ally Bennett, Ananya Kumar, Andre Saraiva, Andrea Vallone, Andrew Duberstein, Andrew Kondrich, Andrey Mishchenko, Andy Applebaum, Angela Jiang, Ashvin Nair, Barret Zoph, Behrooz Ghorbani, Ben Rossen, Benjamin Sokolowsky, Boaz Barak, Bob McGrew, Borys Minaiev, Botao Hao, Bowen Baker, Brandon Houghton, Brandon McKinzie, Brydon Eastman, Camillo Lugaresi, Cary Bassin, Cary Hudson, Chak Ming Li, Charles de Bourcy, Chelsea Voss, Chen Shen, Chong Zhang, Chris Koch, Chris Orsinger, Christopher Hesse, Claudia Fischer, Clive Chan, Dan Roberts, Daniel Kappler, Daniel Levy, Daniel Selsam, David Dohan, David Farhi, David Mely, David Robinson, Dimitris Tsipras, Doug Li, Dragos Oprica, Eben Freeman, Eddie Zhang, Edmund Wong, Elizabeth Proehl, Enoch Cheung, Eric Mitchell, Eric Wallace, Erik Ritter, Evan Mays, Fan Wang, Felipe Petroski Such, Filippo Raso, Florencia Leoni, Foivos

Tsimpourlas, Francis Song, Fred von Lohmann, Freddie Sulit, Geoff Salmon, Giambattista Parascandolo, Gildas Chabot, Grace Zhao, Greg Brockman, Guillaume Leclerc, Hadi Salman, Haiming Bao, Hao Sheng, Hart Andrin, Hessam Bagherinezhad, Hongyu Ren, Hunter Lightman, Hyung Won Chung, Ian Kivlichan, Ian O’Connell, Ian Osband, Ignasi Clavera Gilaberte, Ilge Akkaya, Ilya Kostrikov, Ilya Sutskever, Irina Kofman, Jakub Pachocki, James Lennon, Jason Wei, Jean Harb, Jerry Twore, Jiacheng Feng, Jiahui Yu, Jiayi Weng, Jie Tang, Jieqi Yu, Joaquin Quiñero Candela, Joe Palermo, Joel Parish, Johannes Heidecke, John Hallman, John Rizzo, Jonathan Gordon, Jonathan Uesato, Jonathan Ward, Joost Huizinga, Julie Wang, Kai Chen, Kai Xiao, Karan Singhal, Karina Nguyen, Karl Cobbe, Katy Shi, Kayla Wood, Kendra Rimbach, Keren Gu-Lemberg, Kevin Liu, Kevin Lu, Kevin Stone, Kevin Yu, Lama Ahmad, Lauren Yang, Leo Liu, Leon Maksin, Leyton Ho, Liam Fedus, Lilian Weng, Linden Li, Lindsay McCallum, Lindsey Held, Lorenz Kuhn, Lukas Kondraciuk, Lukasz Kaiser, Luke Metz, Madelaine Boyd, Maja Trebacz, Manas Joglekar, Mark Chen, Marko Tintor, Mason Meyer, Matt Jones, Matt Kaufer, Max Schwarzer, Meghan Shah, Mehmet Yatbaz, Melody Y. Guan, Mengyuan Xu, Mengyuan Yan, Mia Glaese, Mianna Chen, Michael Lampe, Michael Malek, Michele Wang, Michelle Fradin, Mike McClay, Mikhail Pavlov, Miles Wang, Mingxuan Wang, Mira Murati, Mo Bavarian, Mostafa Rohaninejad, Nat McAleese, Neil Chowdhury, Neil Chowdhury, Nick Ryder, Nikolas Tezak, Noam Brown, Ofir Nachum, Oleg Boiko, Oleg Murk, Olivia Watkins, Patrick Chao, Paul Ashbourne, Pavel Izmailov, Peter Zhokhov, Rachel Dias, Rahul Arora, Randall Lin, Rapha Gontijo Lopes, Raz Gaon, Reah Miyara, Reimar Leike, Renny Hwang, Rhythm Garg, Robin Brown, Roshan James, Rui Shu, Ryan Cheu, Ryan Greene, Saachi Jain, Sam Altman, Sam Toizer, Sam Toyer, Samuel Miserendino, Sandhini Agarwal, Santiago Hernandez, Sasha Baker, Scott McKinney, Scottie Yan, Shengjia Zhao, Shengli Hu, Shibani Santurkar, Shraman Ray Chaudhuri, Shuyuan Zhang, Siyuan Fu, Spencer Papay, Steph Lin, Suchir Balaji, Suvansh Sanjeev, Szymon Sidor, Tal Broda, Aidan Clark, Tao Wang, Taylor Gordon, Ted Sanders, Tejal Patwardhan, Thibault Sottiaux, Thomas Degry, Thomas Dimson, Tianhao Zheng, Timur Garipov, Tom Stasi, Trapit Bansal, Trevor Creech, Troy Peterson, Tyna Eloundou, Valerie Qi, Vineet Kosaraju, Vinnie Monaco, Vitthyr Pong, Vlad Fomenko, Weiye Zheng, Wenda Zhou, Wes McCabe, Wojciech Zaremba, Yann Dubois, Yinghai Lu, Yining Chen, Young Cha, Yu Bai, Yuchen He, Yuchen Zhang, Yunyun Wang, Zheng Shao, and Zhuohan Li. OpenAI o1 system card, 2024.

- [2] Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Peiyi Wang, Qihao Zhu, Runxin Xu, Ruoyu Zhang, Shitong Ma, Xiao Bi, Xiaokang Zhang, Xingkai Yu, Yu Wu, Z. F. Wu, Zhibin Gou, Zhihong Shao, Zhuoshu Li, Ziyi Gao, Aixin Liu, Bing Xue, Bingxuan Wang, Bochao Wu, Bei Feng, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chong Ruan, Damai Dai, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Hanwei Xu, Honghui Ding, Huazuo Gao, Hui Qu, Hui Li, Jianzhong Guo, Jiashi Li, Jingchang Chen, Jingyang Yuan, Jinhao Tu, Junjie Qiu, Junlong Li, J. L. Cai, Jiaqi Ni, Jian Liang, Jin Chen, Kai Dong, Kai Hu, Kaichao You, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Liang Zhao, Litong Wang, Liyue Zhang, Lei Xu, Leyi Xia, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Mingxu Zhou, Meng Li, Miaojun Wang, Mingming Li, Ning Tian, Panpan Huang, Peng Zhang, Qiancheng Wang, Qinyu Chen, Qiushi Du, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, R. J. Chen, R. L. Jin, Ruyi Chen, Shanghao Lu, Shangyan Zhou, Shanhuang Chen, Shengfeng Ye, Shiyu Wang, Shuping Yu, Shunfeng Zhou, Shutong Pan, S. S. Li, Shuang Zhou, Shaoqing Wu, Tao Yun, Tian Pei, Tianyu Sun, T. Wang, Wangding Zeng, Wen Liu, Wenfeng Liang, Wenjun Gao, Wenqin Yu, Wentao Zhang, W. L. Xiao, Wei An, Xiaodong Liu, Xiaohan Wang, Xiaokang Chen, Xiaotao Nie, Xin Cheng, Xin Liu, Xin Xie, Xingchao Liu, Xinyu Yang, Xinyuan Li, Xuecheng Su, Xuheng Lin, X. Q. Li, Xiangyue Jin, Xiaojin Shen, Xiaosha Chen, Xiaowen Sun, Xiaoxiang Wang, Xinnan Song, Xinyi Zhou, Xianzu Wang, Xinxia Shan, Y. K. Li, Y. Q. Wang, Y. X. Wei, Yang Zhang, Yanhong Xu, Yao Li, Yao Zhao, Yaofeng Sun, Yaohui Wang, Yi Yu, Yichao Zhang, Yifan Shi, Yiliang Xiong, Ying He, Yishi Piao, Yisong Wang, Yixuan Tan, Yiyang Ma, Yiyuan Liu, Yongqiang Guo, Yuan Ou, Yuduan Wang, Yue Gong, Yuheng Zou, Yujia He, Yunfan Xiong, Yuxiang Luo, Yuxiang You, Yuxuan Liu, Yuyang Zhou, Y. X. Zhu, Yanping Huang, Yaohui Li, Yi Zheng, Yuchen Zhu, Yunxian Ma, Ying Tang, Yukun Zha, Yuting Yan, Z. Z. Ren, Zehui Ren, Zhangli Sha, Zhe Fu, Zhean Xu, Zhenda Xie, Zhengyan Zhang, Zhewen Hao, Zhicheng Ma, Zhigang Yan, Zhiyu Wu, Zihui Gu, Zijia Zhu, Zijun Liu, Zilin Li, Ziwei Xie, Ziyang Song, Zizheng Pan, Zhen Huang, Zhipeng Xu, Zhongyu Zhang, and Zhen Zhang. Deepseek-r1 incentivizes reasoning in llms through reinforcement learning. *Nature*, 645(8081):633–638, September 2025.
- [3] Kimi Team, Angang Du, Bofei Gao, Bowei Xing, Changjiu Jiang, Cheng Chen, Cheng Li, Chenjun Xiao, Chenzhuang Du, Chonghua Liao, Chunling Tang, Congcong Wang, Dehao Zhang, Enming Yuan, Enzhe Lu, Fengxiang Tang, Flood Sung, Guangda Wei, Guokun Lai, Haiqing Guo, Han Zhu, Hao Ding, Hao Hu, Hao Yang, Hao Zhang, Haotian Yao, Haotian Zhao, Haoyu Lu, Haoze Li, Haozhen Yu, Hongcheng Gao, Huabin Zheng, Huan Yuan, Jia Chen, Jianhang Guo, Jianlin Su, Jianzhou Wang, Jie Zhao, Jin Zhang, Jingyuan Liu, Junjie Yan, Junyan Wu, Lidong Shi, Ling Ye, Longhui Yu, Mengnan Dong, Neo Zhang, Ningchen Ma, Qiwei Pan, Qucheng Gong, Shaowei Liu, Shengling Ma, Shupeng Wei, Sihan Cao, Siying Huang, Tao Jiang, Weihao Gao, Weimin Xiong, Weiran He, Weixiao Huang, Weixin Xu, Wenhao Wu, Wenyang He, Xianghui Wei, Xianqing Jia, Xingzhe

- Wu, Xinran Xu, Xinxing Zu, Xinyu Zhou, Xuehai Pan, Y. Charles, Yang Li, Yangyang Hu, Yangyang Liu, Yanru Chen, Yejie Wang, Yibo Liu, Yidao Qin, Yifeng Liu, Ying Yang, Yiping Bao, Yulun Du, Yuxin Wu, Yuzhi Wang, Zaida Zhou, Zhaoji Wang, Zhaowei Li, Zhen Zhu, Zheng Zhang, Zhexu Wang, Zhilin Yang, Zhiqi Huang, Zihao Huang, Ziyao Xu, Zonghan Yang, and Zongyu Lin. Kimi k1.5: Scaling reinforcement learning with llms, 2025.
- [4] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y. K. Li, Y. Wu, and Daya Guo. Deepseekmath: Pushing the limits of mathematical reasoning in open language models, 2024.
- [5] Jonas Hübner, Frederike Lübeck, Lejs Behric, Anton Baumann, Marco Bagatella, Daniel Marta, Ido Hakimi, Idan Shenfeld, Thomas Kleine Buening, Carlos Guestrin, et al. Reinforcement learning via self-distillation. *arXiv preprint arXiv:2601.20802*, 2026.
- [6] Yang Yue, Zhiqi Chen, Rui Lu, Andrew Zhao, Zhaokai Wang, Yang Yue, Shiji Song, and Gao Huang. Does reinforcement learning really incentivize reasoning capacity in llms beyond the base model?, 2025.
- [7] Zhiyuan Hu, Yucheng Wang, Yufei He, Jiaying Wu, Yilun Zhao, See-Kiong Ng, Cynthia Breazeal, Anh Tuan Luu, Hae Won Park, and Bryan Hooi. Rewarding the rare: Uniqueness-aware rl for creative problem solving in llms. *arXiv preprint arXiv:2601.08763*, 2026.
- [8] Ganqu Cui, Lifan Yuan, Zefan Wang, Hanbin Wang, Wendi Li, Bingxiang He, Yuchen Fan, Tianyu Yu, Qixin Xu, Weize Chen, et al. Process reinforcement through implicit rewards. *arXiv preprint arXiv:2502.01456*, 2025.
- [9] Peiyi Wang, Lei Li, Zhihong Shao, Runxin Xu, Damai Dai, Yifei Li, Deli Chen, Yu Wu, and Zhifang Sui. Math-shepherd: Verify and reinforce llms step-by-step without human annotations. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 9426–9439, 2024.
- [10] Guofu Xie, Yunsheng Shi, Hongtao Tian, Ting Yao, and Xiao Zhang. Capo: Towards enhancing llm reasoning through generative credit assignment. *arXiv preprint arXiv:2508.02298*, 2025.
- [11] Xueru Wen, Jie Lou, Yaojie Lu, Hongyu Lin, Xing Yu, Xinyu Lu, Ben He, Xianpei Han, Debing Zhang, and Le Sun. Rethinking reward model evaluation: Are we barking up the wrong tree? *arXiv preprint arXiv:2410.05584*, 2024.
- [12] Leo Gao, John Schulman, and Jacob Hilton. Scaling laws for reward model overoptimization. In *International Conference on Machine Learning*, pages 10835–10866. PMLR, 2023.
- [13] Jeonghye Kim, Xufang Luo, Minbeom Kim, Sangmook Lee, Dohyung Kim, Jiwon Jeon, Dongsheng Li, and Yuqing Yang. Why does self-distillation (sometimes) degrade the reasoning capability of llms? *arXiv preprint arXiv:2603.24472*, 2026.
- [14] ByteDance Seed, Yuyu Zhang, Jing Su, Yifan Sun, Chenguang Xi, Xia Xiao, Shen Zheng, Anxiang Zhang, Kaibo Liu, Daoguang Zan, Tao Sun, Jinhua Zhu, Shulin Xin, Dong Huang, Yetao Bai, Lixin Dong, Chao Li, Jianchong Chen, Hanzhi Zhou, Yifan Huang, Guanghan Ning, Xierui Song, Jiaze Chen, Siyao Liu, Kai Shen, Liang Xiang, and Yonghui Wu. Seed-coder: Let the code model curate data for itself, 2025.
- [15] Runchu Tian, Yining Ye, Yujia Qin, Xin Cong, Yankai Lin, Yinxu Pan, Yesai Wu, Hui Haotian, Liu Weichuan, Zhiyuan Liu, and Maosong Sun. DebugBench: Evaluating debugging capability of large language models. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Findings of the Association for Computational Linguistics: ACL 2024*, pages 4173–4198, Bangkok, Thailand, August 2024. Association for Computational Linguistics.
- [16] Anthropic. Claude 4. <https://www.anthropic.com/news/claude-4>, 2025. Accessed: 2026-01-29.
- [17] An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, Chujie Zheng, Dayiheng Liu, Fan Zhou, Fei Huang, Feng Hu, Hao Ge, Haoran Wei, Huan Lin, Jialong Tang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxi Yang, Jing Zhou, Jingren Zhou, Junyang Lin, Kai Dang, Keqin Bao, Kexin Yang, Le Yu, Lianghao Deng, Mei Li, Mingfeng Xue, Mingze Li, Pei Zhang, Peng Wang, Qin Zhu, Rui Men, Ruize Gao, Shixuan Liu, Shuang Luo, Tianhao Li, Tianyi Tang, Wenbiao Yin, Xingzhang Ren, Xinyu Wang, Xinyu Zhang, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yinger Zhang, Yu Wan, Yuqiong Liu, Zekun Wang, Zeyu Cui, Zhenru Zhang, Zhipeng Zhou, and Zihan Qiu. Qwen3 technical report, 2025.
- [18] Oliver Mihatsch and Ralph Neuneier. Risk-sensitive reinforcement learning. *Machine learning*, 49(2):267–290, 2002.
- [19] Qiyang Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Weinan Dai, Tiantian Fan, Gaohong Liu, Lingjun Liu, Xin Liu, Haibin Lin, Zhiqi Lin, Bole Ma, Guangming Sheng, Yuxuan Tong, Chi Zhang, Mofan Zhang, Wang Zhang, Hang Zhu, Jinhua Zhu, Jiaze Chen, Jiangjie Chen, Chengyi Wang, Hongli Yu, Yuxuan Song,

- Xiangpeng Wei, Hao Zhou, Jingjing Liu, Wei-Ying Ma, Ya-Qin Zhang, Lin Yan, Mu Qiao, Yonghui Wu, and Mingxuan Wang. Dapo: An open-source llm reinforcement learning system at scale, 2025.
- [20] Jiazheng Li, Hongzhou Lin, Hong Lu, Kaiyue Wen, Zaiwen Yang, Jiaxuan Gao, Yi Wu, and Jingzhao Zhang. Questa: Expanding reasoning capacity in llms via question augmentation, 2025.
 - [21] Xiaoyin Chen, Jiarui Lu, Minsu Kim, Dinghuai Zhang, Jian Tang, Alexandre Piché, Nicolas Gontier, Yoshua Bengio, and Ehsan Kamaloo. Self-evolving curriculum for llm reasoning. *arXiv preprint arXiv:2505.14970*, 2025.
 - [22] Tianjian Li, Yiming Zhang, Ping Yu, Swarnadeep Saha, Daniel Khashabi, Jason Weston, Jack Lanchantin, and Tianlu Wang. Jointly reinforcing diversity and quality in language model generations, 2025.
 - [23] Anonymous. Deepscaler: Effective RL scaling of reasoning models via iterative context lengthening. In *Submitted to The Fourteenth International Conference on Learning Representations*, 2025. under review.
 - [24] Xiaoyu Tian, Sitong Zhao, Haotian Wang, Shuaiting Chen, Yiping Peng, Yunjie Ji, Han Zhao, and Xiangang Li. Deepdistill: Enhancing llm reasoning capabilities via large-scale difficulty-graded data training, 2025.
 - [25] Bytedance-Seed-Foundation-Code-Team, :, Yao Cheng, Jianfeng Chen, Jie Chen, Li Chen, Liyu Chen, Wentao Chen, Zhengyu Chen, Shijie Geng, Aoyan Li, Bo Li, Bowen Li, Linyi Li, Boyi Liu, Jiaheng Liu, Kaibo Liu, Qi Liu, Shukai Liu, Siyao Liu, Tianyi Liu, Tingkai Liu, Yongfei Liu, Rui Long, Jing Mai, Guanghan Ning, Z. Y. Peng, Kai Shen, Jiahao Su, Jing Su, Tao Sun, Yifan Sun, Yunzhe Tao, Guoyin Wang, Siwei Wang, Xuwu Wang, Yite Wang, Zihan Wang, Jinxiang Xia, Liang Xiang, Xia Xiao, Yongsheng Xiao, Chenguang Xi, Shulin Xin, Jingjing Xu, Shikun Xu, Hongxia Yang, Jack Yang, Yingxiang Yang, Jianbo Yuan, Jun Zhang, Yufeng Zhang, Yuyu Zhang, Shen Zheng, He Zhu, and Ming Zhu. Fullstack bench: Evaluating llms as full stack coders, 2025.
 - [26] Arash Ahmadian, Chris Cremer, Matthias Gallé, Marzieh Fadaee, Julia Kreutzer, Olivier Pietquin, Ahmet Üstün, and Sara Hooker. Back to basics: Revisiting reinforce-style optimization for learning from human feedback in llms. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 12248–12267, 2024.
 - [27] Guangming Sheng, Chi Zhang, Zilingfeng Ye, Xibin Wu, Wang Zhang, Ru Zhang, Yanghua Peng, Haibin Lin, and Chuan Wu. Hybridflow: A flexible and efficient rlhf framework. *arXiv preprint arXiv: 2409.19256*, 2024.
 - [28] Yifan Zhang and Team Math-AI. American invitational mathematics examination (aime) 2024, 2024.
 - [29] Yifan Zhang and Team Math-AI. American invitational mathematics examination (aime) 2025, 2025.
 - [30] Hunter Lightman, Vineet Kosaraju, Yura Burda, Harri Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step. *arXiv preprint arXiv:2305.20050*, 2023.
 - [31] Aitor Lewkowycz, Anders Andreassen, David Dohan, Ethan Dyer, Henryk Michalewski, Vinay Ramasesh, Ambrose Slone, Cem Anil, Imanol Schlag, Theo Gutman-Solo, et al. Solving quantitative reasoning problems with language models. *Advances in neural information processing systems*, 35:3843–3857, 2022.
 - [32] Chaoqun He, Renjie Luo, Yuzhuo Bai, Shengding Hu, Zhen Thai, Junhao Shen, Jinyi Hu, Xu Han, Yujie Huang, Yuxiang Zhang, Jie Liu, Lei Qi, Zhiyuan Liu, and Maosong Sun. OlympiadBench: A challenging benchmark for promoting AGI with olympiad-level bilingual multimodal scientific problems. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3828–3850, Bangkok, Thailand, August 2024. Association for Computational Linguistics.
 - [33] Naman Jain, King Han, and Wen-Ding Li Alex Gu, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando Solar-Lezama, Koushik Sen, and Ion Stoica. Livecodebench: Holistic and contamination free evaluation of large language models for code. *arXiv preprint*, 2024.
 - [34] Yunhui Xia, Wei Shen, Yan Wang, Jason Klein Liu, Huifeng Sun, Siyue Wu, Jian Hu, and Xiaolong Xu. Leetcodedataset: A temporal dataset for robust evaluation and efficient training of code llms. *arXiv preprint arXiv:2504.14655*, 2025.
 - [35] Zicheng Lin, Zhibin Gou, Tian Liang, Ruilin Luo, Haowei Liu, and Yujiu Yang. CriticBench: Benchmarking LLMs for critique-correct reasoning. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Findings of the Association for Computational Linguistics: ACL 2024*, pages 1552–1587, Bangkok, Thailand, August 2024. Association for Computational Linguistics.
 - [36] Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step. In *The Twelfth International Conference on Learning Representations*, 2023.

- [37] Jonathan Uesato, Nate Kushman, Ramana Kumar, Francis Song, Noah Siegel, Lisa Wang, Antonia Creswell, Geoffrey Irving, and Irina Higgins. Solving math word problems with process-and outcome-based feedback. *arXiv preprint arXiv:2211.14275*, 2022.
- [38] Liangchen Luo, Yinxiao Liu, Rosanne Liu, Samrat Phatale, Meiqi Guo, Harsh Lara, Yunxuan Li, Lei Shu, Yun Zhu, Lei Meng, et al. Improve mathematical reasoning in language models by automated process supervision. *arXiv preprint arXiv:2406.06592*, 2024.
- [39] Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *Advances in Neural Information Processing Systems*, 36:8634–8652, 2023.
- [40] Marcin Andrychowicz, Filip Wolski, Alex Ray, Jonas Schneider, Rachel Fong, Peter Welinder, Bob McGrew, Josh Tobin, OpenAI Pieter Abbeel, and Wojciech Zaremba. Hindsight experience replay. *Advances in neural information processing systems*, 30, 2017.
- [41] Kongcheng Zhang, Qi Yao, Shunyu Liu, Wenjian Zhang, Min Cen, Yang Zhou, Wenkai Fang, Yiru Zhao, Baisheng Lai, and Mingli Song. Replay failures as successes: Sample-efficient reinforcement learning for instruction following. *arXiv preprint arXiv:2512.23457*, 2025.
- [42] Shengnan An, Zexiong Ma, Zeqi Lin, Nanning Zheng, Jian-Guang Lou, and Weizhu Chen. Learning from mistakes makes llm better reasoner. *arXiv preprint arXiv:2310.20689*, 2023.
- [43] Xin Zheng, Jie Lou, Boxi Cao, Xueru Wen, Yuqiu Ji, Hongyu Lin, Yaojie Lu, Xianpei Han, Debing Zhang, and Le Sun. Critic-cot: Boosting the reasoning abilities of large language model via chain-of-thought critic. In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 1768–1806, 2025.
- [44] Yubo Wang, Xiang Yue, and Wenhui Chen. Critique fine-tuning: Learning to critique is more effective than learning to imitate. *arXiv preprint arXiv:2501.17703*, 2025.
- [45] Aviral Kumar, Vincent Zhuang, Rishabh Agarwal, Yi Su, John D Co-Reyes, Avi Singh, Kate Baumli, Shariq Iqbal, Colton Bishop, Rebecca Roelofs, et al. Training language models to self-correct via reinforcement learning. *arXiv preprint arXiv:2409.12917*, 2024.
- [46] Jonas Gehring, Kunhao Zheng, Jade Copet, Vegard Mella, Quentin Carbonneaux, Taco Cohen, and Gabriel Synnaeve. Rlef: Grounding code llms in execution feedback with reinforcement learning. *arXiv preprint arXiv:2410.02089*, 2024.
- [47] Xinyun Chen, Maxwell Lin, Nathanael Schärli, and Denny Zhou. Teaching large language models to self-debug. *arXiv preprint arXiv:2304.05128*, 2023.

A Details about Method

A.1 Algorithm of CIPO

Algorithm 1 outlines the core workflow of CIPO. In practice, to improve training efficiency, correction rollouts are based on the previous step, enabling parallel sampling instead of sequentially waiting for the base rollout to complete and be rewarded.

Algorithm 1 Correction-Oriented Policy Optimization

Require: Initial policy π_θ , prompt set $\mathcal{D}$, reward function $R(\cdot)$

- 1: **Hyperparams:** group size G , replay fraction γ , difficulty range $[\delta_{\text{low}}, \delta_{\text{high}}]$, risk penalty λ_{risk} , target reward R^*
- 2: Initialize $\rho \leftarrow \rho_0$, $c \leftarrow 0$, $R_{\text{prev}} \leftarrow \text{None}$
- 3: **for** training step $t = 1, 2, \dots$ **do**
- 4: *// Base rollouts*
- 5: Sample prompts $\{x_j\}_{j=1}^B$ from $\mathcal{D}$; for each x , sample G responses and compute rewards
- 6: Collect base trajectories $\mathcal{B}_{\text{base}} = \{(x, y_i, r_i)\}$
- 7: *// Correction rollouts*
- 8: $\mathcal{S}_{\text{replay}} \leftarrow \text{ROLLOUTREPLAY}(\mathcal{B}_{\text{base}}, [\delta_{\text{low}}, \delta_{\text{high}}], \lfloor \gamma B \rfloor, \rho)$ as in Algorithm 2
- 9: **for each** $(x, y_c, r_c) \in \mathcal{S}_{\text{replay}}$ **do**
- 10: Construct $x' \leftarrow \text{AUGMENT}(x, y_c)$; sample G responses $\{y'_i\}_{i=1}^G$
- 11: Compute shaped rewards $\tilde{r}_i \leftarrow R_{\text{risk}}(x, y_c, y'_i)$ via Eq. 1
- 12: **end for**
- 13: Collect correction trajectories $\mathcal{B}_{\text{cor}} = \{(x', y'_i, \tilde{r}_i)\}$
- 14: *// Policy update*
- 15: Update π_θ on $\mathcal{B}_{\text{base}} \cup \mathcal{B}_{\text{cor}}$
- 16: *// Adaptive ratio update*
- 17: $\mathcal{S}_+ \leftarrow \{(x', y'_i, \tilde{r}_i) \in \mathcal{B}_{\text{cor}} : r_c = 1\}$
- 18: *// corrections conditioned on successful trajectories*
- 19: $R_t \leftarrow \frac{1}{|\mathcal{S}_+|} \sum_{(x', y', \tilde{r}) \in \mathcal{S}_+} \tilde{r}$
- 20: $\rho, c \leftarrow \text{UPDATERATIO}(\rho, R_t, R_{\text{prev}}, c; R^*)$ as in Algorithm 3
- 21: $R_{\text{prev}} \leftarrow R_t$
- 22: **end for**
- 23: **Return:** π_θ

A.2 Algorithm of RolloutReplay and UpdateRatio

This section presents detailed descriptions of the two sub-algorithms employed in Algorithm 1.

RolloutReplay (Algorithm 2) selects trajectories for correction rollouts. It first prioritizes prompts within the medium-difficulty range $[\delta_{\text{low}}, \delta_{\text{high}}]$ based on their empirical pass rates, then falls back to remaining prompts if needed. The selected trajectories are split into successful and failed groups, with the ratio ρ controlling their mixture. The detailed hyperparameter settings are provided in Appendix B.

Algorithm 2 ROLLOUTREPLAY($\mathcal{B}$, $[\delta_{\text{low}}, \delta_{\text{high}}]$, N , ρ)

- 1: **Input:** base rollouts $\mathcal{B} = \{(x, y, r)\}$, difficulty range $[\delta_{\text{low}}, \delta_{\text{high}}]$, target size N , positive ratio ρ
- 2: Compute per-prompt pass rate $\hat{P}(x) = \frac{1}{|\{(x, y, r) \in \mathcal{B}\}|} \sum_{(x, y, r) \in \mathcal{B}} r$
- 3: $\mathcal{B}_{\text{med}} \leftarrow \{(x, y, r) \in \mathcal{B} : \delta_{\text{low}} \leq \hat{P}(x) \leq \delta_{\text{high}}\}$ *// medium-difficulty*
- 4: $\mathcal{B}' \leftarrow \text{SHUFFLE}(\mathcal{B}_{\text{med}}) \oplus \text{SHUFFLE}(\mathcal{B} \setminus \mathcal{B}_{\text{med}})$ *// prioritize medium, fallback to rest*
- 5: Split $\mathcal{B}'$ into $\mathcal{B}_+ = \{(x, y, r) : r = 1\}$ and $\mathcal{B}_- = \{(x, y, r) : r = 0\}$
- 6: $N_+ \leftarrow \min(\lfloor \rho N \rfloor, |\mathcal{B}_+|)$, $N_- \leftarrow \min(N - N_+, |\mathcal{B}_-|)$
- 7: Backfill from $\mathcal{B}_+$ if $N_+ + N_- < N$
- 8: **Return:** $\mathcal{B}_+[1:N_+] \cup \mathcal{B}_-[1:N_-]$

UpdateRatio. As shown in Algorithm 3, we adapt the replay ratio $\rho_t \in [\rho_{\text{min}}, \rho_{\text{max}}]$ according to the model’s retention performance on replayed successful samples. Let R_t denote the average shaped reward on corrections replayed from

successful trajectories at iteration t , and let R^* denote the target retention level. The replay ratio is updated using three signals: the current performance gap to the target, the recent performance deterioration relative to the previous step, and a capped consecutive-underperformance term:

$$\rho_{t+1} = \text{clip}[\rho_t (1 + w_1(R^* - R_t) + w_2 \max(0, R_{t-1} - R_t) + w_3 \min(c_t, 3)), \rho_{\min}, \rho_{\max}]. \quad (4)$$

Here, c_t denotes the consecutive-underperformance counter, which is incremented when $R_t < R^*$ and reset otherwise. The first term increases the replay fraction of successful trajectories when the current retention performance falls below the target. The second term further increases this fraction when retention performance deteriorates relative to the previous iteration. The third term makes the update more conservative under persistent underperformance, while capping its contribution to avoid dominating the overall update. Detailed hyperparameter settings are provided in Appendix B.

Algorithm 3 UPDATERATIO($\rho_t, R_t, R_{t-1}, c_{t-1}; R^*$)

```

1: Input: current replay ratio  $\rho_t$ , current average shaped reward  $R_t$ , previous average shaped reward  $R_{t-1}$ , previous
   underperformance counter  $c_{t-1}$ , target reward  $R^*$ 
2: Hyperparameters:  $w_1, w_2, w_3, \rho_{\min}, \rho_{\max}$ 
3: if  $R_t < R^*$  then
4:    $c_t \leftarrow c_{t-1} + 1$ 
5: else
6:    $c_t \leftarrow 0$ 
7: end if
8:  $f_1 \leftarrow R^* - R_t$ 
9: if  $R_{t-1}$  is available then
10:   $f_2 \leftarrow \max(0, R_{t-1} - R_t)$ 
11: else
12:   $f_2 \leftarrow 0$ 
13: end if
14:  $f_3 \leftarrow \min(c_t, 3)$ 
15:  $\rho_{t+1} \leftarrow \text{CLIP}(\rho_t \cdot (1 + w_1 f_1 + w_2 f_2 + w_3 f_3), \rho_{\min}, \rho_{\max})$ 
16: return  $\rho_{t+1}, c_t$ 

```

A.3 Correction Prompt Construction.

After selecting a subset of rollouts $\mathcal{R}$ (containing both correct and incorrect candidates), we construct **correction prompts** that condition on the original problem and the model’s previous attempt. Specifically, for a selected rollout (x, y_{cand}, r) , we create:

```

{Original Prompt x}

Below is a candidate solution from a large language model (correctness unknown):

<candidate_solution>
{y_cand}
</candidate_solution>

Please refer to this solution and provide your solution.

```

Crucially, we inform the model that the candidate’s **correctness is unknown**, avoiding explicit labeling that would leak reward information and undermine the RL objective.

This construction transforms a potentially failed response into a structured learning signal: the model learns to *recognize and fix its own mistakes* (when y_{cand} is incorrect) or *reinforce correct reasoning patterns* (when y_{cand} is correct), rather than simply avoiding failures through likelihood suppression.

B Hyperparameters

Table 6 details the full hyperparameters configuration for CIPO.

Module	Hyperparameter	Value
Adaptive Replay Ratio	ρ_0	0.3
	$\rho_{\min}, \rho_{\max}$	0.2, 0.8
	w_1, w_2, w_3	0.8, 0.3, 0.05
	R^*	0.80
Risk-Averse Reward Shaping	λ_{risk}	1
Difficulty-aware Trajectory Preference	$\delta_{\text{low}}, \delta_{\text{high}}$	$\frac{3}{8}, \frac{6}{8}$
Replay Sampling	n	8
Joint Optimization	λ	1

Table 6: Hyperparameter configuration of CIPO.