

Rethinking How to Remember: Beyond Atomic Facts in Lifelong LLM Agent Memory

Jingwei Sun^{*1}, Jianing Zhu^{*2}, Jiangchao Yao³, Tongliang Liu⁴, Bo Han^{†1}

¹TMLR Group, Hong Kong Baptist University

²The University of Texas at Austin

³Shanghai Jiao Tong University

⁴Sydney AI Center, The University of Sydney

^{*}Equal contribution; [†]Corresponding to: bhanml@comp.hkbu.edu.hk

Abstract

To enable reliable long-term interaction, LLM agents require a memory system that can faithfully store, efficiently retrieve, and deeply reason over accumulated dialogue history. Most existing methods adopt an extracted fact based paradigm: handcrafted static prompts compress raw dialogues into atomic facts, which are then stored, matched, and injected into downstream reasoning. Nevertheless, such fact-centric designs inevitably discard fine-grained details in original dialogues and fail to support deep reasoning over scattered isolated facts. Moreover, static prompts cannot maintain consistent extraction granularity across diverse dialogue styles. To address these limitations, we propose TriMem, which maintains three coexisting representation granularities, including raw dialogue segments anchored by source identifiers for storage fidelity, extracted atomic facts for efficient memory retrieval, synthesized profiles that aggregate dispersed facts into holistic semantic understanding for deep reasoning. We further adopt TextGrad-based prompt optimization, which iteratively refines extraction and profiling prompts via response quality feedback, achieving lifelong evolution without any parameter updating. Extensive experiments on LoCoMo and PerLTQA across multiple LLM backbones demonstrate that TriMem consistently outperforms strong memory baselines. The code is available at <https://TMLR-TriMem.github.io>.

1 Introduction

The rapid development of large language models (LLMs) has driven significant breakthroughs in agent technology (Huang et al., 2024; Li et al., 2024; Yu et al., 2025b), which has demonstrated remarkable capabilities in a wide range of scenarios (Acikgoz et al., 2025; Qin et al., 2025; Tian et al., 2026). However, in practical applications, constrained by the capacity of the context window, text overflow inevitably occurs when it comes to long-context and multi-turn interaction scenarios, leading to significant limitations in agents due to the loss of key historical interaction information and broken context logic (Yan et al., 2025; Yu et al., 2025a; Sheng et al., 2026). To enable reliable long-term interaction, LLM agents require a robust memory system to effectively manage and leverage historical experiences.

Recent research has extensively investigated the design of memory modules for LLM agents (Kang et al., 2025; Chhikara et al., 2025; Fang et al., 2025; Liu et al., 2026; Hu et al., 2026), with the overarching goal of realizing three core functional capabilities: storing information from historical interactions, retrieving relevant memories upon query, and incorporating them into prompts to support reasoning. As shown on the left side of Figure 1, existing systems typically rely on extracted factual information generated by static hand-written prompts to fulfill these three objectives. They only store extracted key facts produced by fixed prompts, perform retrieval based on similarity

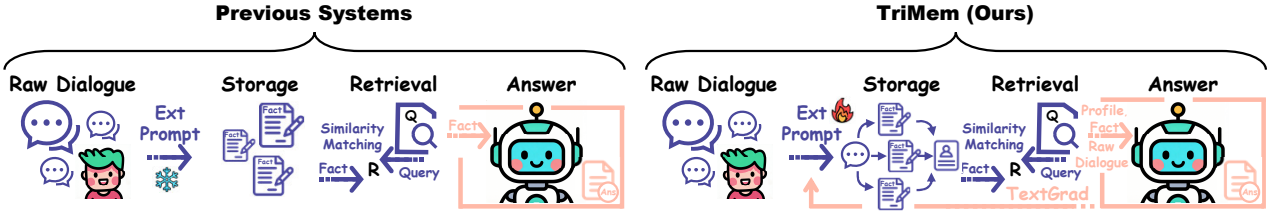


Figure 1: **Comparison with previous systems.** Our system establishes a three-level architecture, which leverages raw dialogue to guarantee information fidelity in storage, relies on key facts to enable efficient retrieval, and provides in-depth understanding over the facts to ensure the reliability of reasoning. The construction prompts are also continuously optimized based on answer feedback.

matching against these facts, and utilize the relevant information to support reasoning, which naturally raises two critical questions: *Can extracted facts beneficially affect all three stages of agent memory systems?* and *can static fixed prompts adaptively maintain consistent and rational extraction granularity when facing highly heterogeneous real-world dialogue scenarios?*

In this paper, we start by highlighting two concerning phenomena: extracted facts suffer from information loss, and reasoning for many real-world questions relies on understanding rather than simple fact matching. As shown in Figure 2, we analyze the performance of existing memory systems from storage fidelity, retrieval efficiency, and reasoning quality. The results demonstrate that although structured factual information ensures efficient retrieval, some precise details are inevitably lost since fact extraction necessarily compresses lengthy dialogues into concise representations. Fortunately, the original dialogue preserves complete information and can serve as an auxiliary source to recover these unstored details. Furthermore, while some questions can be answered using a single retrieved fact, others require integrating scattered information to form a comprehensive understanding. This suggests that a memory system should be capable of further information integration and in-depth comprehension beyond discrete factual pieces. Such a three-level architecture, consisting of raw dialogue storage, extracted fact based retrieval, and understanding-aided reasoning, offers potential for balancing the three core functionalities of a memory system. We also illustrate that the diversity of information styles leads to inconsistent extraction granularity, which significantly degrade system performance. Therefore, we require a mechanism that can continuously optimize prompts, enabling the system to adaptively balance storage depth, retrieval efficiency, and reasoning quality over time.

Based on our findings in the analysis, we propose *Tri-Granularity Memory* (TriMem), a memory architecture that maintains three coexisting granularities of representation, including verbatim dialogues, extracted facts, and synthesized profiles. In general, it builds source dialogue identifiers to preserve pointers to original dialogue segments for each compressed memory entry and employs a profile module that incrementally integrates scattered facts during ingestion to form understanding (as shown in the right part of Figure 1). On the one hand, considering the insufficient retention of detailed information, a traceable link is created for each compressed memory entry, which is directly associated with the original dialogue from which the entry is derived. On the other hand, considering the lack of in-depth understanding of factual information, incremental profile is constructed based on the new information of each window and pre-integrated understanding is provided at reasoning time, thus eliminating the need to perform complex comprehensive analysis among scattered facts. Furthermore, unlike previous methods that utilize hand-written prompts, we employ TextGrad-based prompt optimization (Yuksekgonul et al., 2024) to iteratively refine system prompts, thereby achieving the precise and high-quality construction of the memory module. To demonstrate the effectiveness of our method, we conduct extensive experiments on commonly used benchmarks (Maharana et al., 2024; Du et al., 2024) and provide discussions on various ablations to justify the rationality. Our main contributions are summarized as follows:

- Conceptually, we revisit the memory systems of LLM agents from a novel three-dimensional perspective, systematically exploring the limitations of existing paradigms spanning storage fidelity, indexing efficiency and reasoning quality (in Section 2).
- Technically, we propose TriMem, which innovatively introduces entity profile module to avoid shallow reasoning, preserves raw dialogue identifier to avoid detail loss and iteratively optimize system prompts to avoid performance fluctuation (in Section 3).
- Experimentally, we conduct extensive explorations to verify the effectiveness of TriMem under different scenarios, including the significant improvement across various benchmarks, compatibility with diverse model structure and model size, etc (in Section 4).

2 Preliminary and Motivation

In this section, we review the preliminaries of conventional agent memory systems (in Section 2.1), and conduct an in-depth analysis of the inherent limitations of existing agent memory systems (in Section 2.2). The experimental details of our analysis can be found in Appendix B.

2.1 Conventional Agent Memory Systems

We characterize the mainstream memory architecture (Kang et al., 2025; Chhikara et al., 2025; Liu et al., 2026) into three core phases: **(I) Storage**. Given a historical dialogue $\mathcal{H} = \{(r_t, u_t)\}_{t=1}^T$ consisting of T turns of interaction between the user r and u , we first partition it into discrete windows $\mathcal{W} = \{w_1, w_2, \dots, w_N\}$ following a specific granularity $g \in \{\text{turn}, \text{session}, \text{topic}\}$. Key factual information is then extracted by one LLM agent ϕ and fixed extraction prompt $\mathbf{p}_e$ from each window to generate memory entries $\mathcal{E} = \{e_i | e_i = \phi(\mathcal{W}, \mathbf{p}_e)\}_{i=1}^K$. **(II) Retrieval**. Given question q , relevant entries are retrieved from the memory bank through similarity matching $\mathcal{E}^*(q) = \text{top-}K_{e_i \in \mathcal{E}} \text{sim}(e_i, k_q)$, k_q is either the question itself or query about the question, such as keywords. **(III) Reasoning**. The retrieved entries are concatenated with the question, which is subsequently fed into the language model to generate a final response $a = \phi(\mathcal{E}^*(q), q)$.

2.2 Analysis of Existing Systems

Efficient Retrieval. As illustrated in Figure 2, we compare one representative system (Liu et al., 2026) with full-context based RAG strategy (Lewis et al., 2020), in terms of the ratio of successfully retrieved question-related evidence. It can be seen that the extracted fact based retrieval enables more efficient and accurate localization of relevant memory entries. This alleviates the critical limitation of full-context based retrieval, which tends to introduce massive irrelevant and distracting content. For instance, when a query contains the keyword *career*, the full-context based RAG strategy retrieves massive sentences containing lexical variants such as *job* and *career*, where redundant noise severely degrades retrieval efficiency. In contrast, extracted facts are summarized across multi-turn dialogues, thus enabling precise semantic matching and substantially improving retrieval performance. However, the heavy reliance of subsequent phases on these extracted fact introduces several limitations we examine next.

Lossy Storage. Although retrieval on extracted facts enables accurate memory localization, the fact extraction process inevitably introduces lossy compression of raw information, where fine-grained details are discarded, resulting in inherent information incompleteness within stored memory entries. As illustrated in Figure 2, we calculate the coverage rate of reference answer token, it can be seen that the extracted fact loss 14.5% more information than original dialogue. For example, the modifier *trans* in the original dialogue is omitted during fact extraction. This directly leads to a

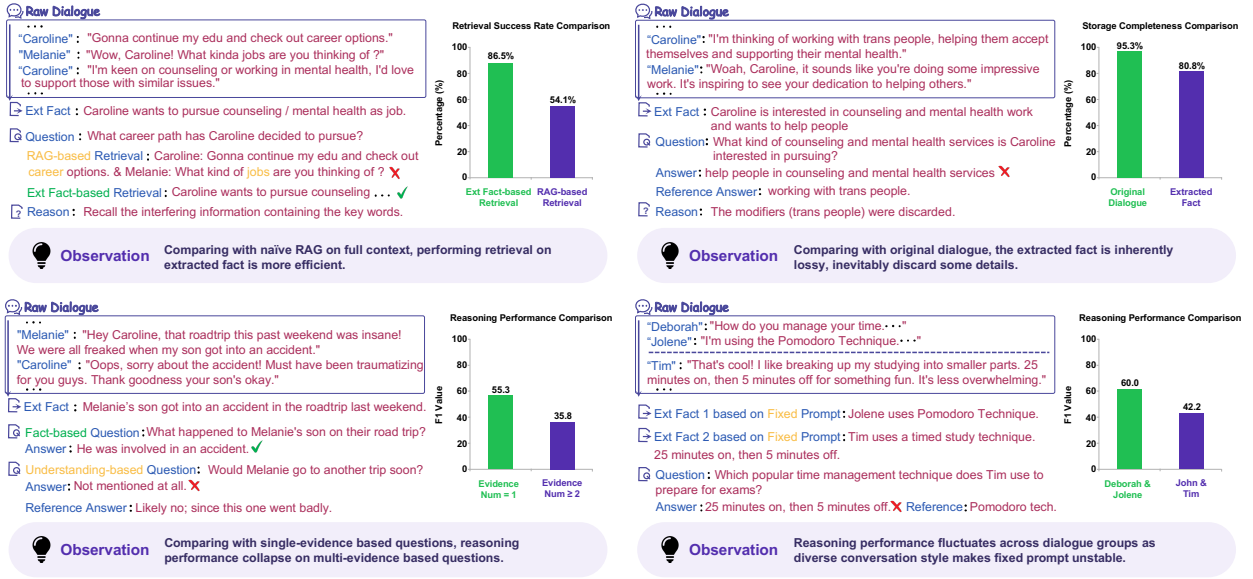


Figure 2: **Analysis of existing agent memory systems.** Although the totally extracted fact based systems enable efficient retrieval, they suffer from lossy storage and shallow reasoning. Additionally, the fixed prompt words cannot be well applied to all contexts, which compromise the performance.

critical issue: even if the system retrieves topically relevant entries, it still fails to provide accurate and complete answers due to missing key contextual details from raw dialogues. This implies that completely abandoning raw dialogues and relying solely on extracted facts for storage will result in permanent loss of semantic details. Such systems become incapable of solving detail-dependent and high-precision constrained queries, thus suffering from inevitable performance degradation.

Shallow Reasoning. Beyond the aforementioned issue of irreversible information loss during extraction, existing extracted fact based memory systems additionally suffer from a fundamental capability bottleneck of shallow reasoning. As illustrated in Figure 2, we test the reasoning performance of those correctly retrieved questions. The results reveal that the reasoning performance on multi-evidence questions is considerably inferior to that on single-evidence ones, as single-evidence questions mostly rely on explicit factual content and can be answered by directly restating content in retrieved memory entries. In contrast, multi-evidence questions demand deep understanding of dispersed facts, such as emotional inference and logical induction. This phenomenon adequately demonstrates that reasoning mechanisms solely relying on extracted fact completely lack the ability of deep comprehension towards entity semantic portraits or behavioral tendency modeling, thereby severely hindering the comprehensive performance of LLM agents in long-term interactions.

Suboptimal Prompt. In addition to the information loss and shallow reasoning issues incurred by extracted facts, practical real-world deployments further suffer from performance degradation caused by unstable extraction granularity with fixed prompts. Realistic long-term interactions involve highly diverse information styles, expression patterns and content categories, whereas conventional systems rely on static hand-written extraction prompts. Such fixed prompts fail to adaptively accommodate heterogeneous dialogue content, making it impossible to maintain consistent and rational fact extraction granularity. As illustrated in Figure 2, we compare the reasoning performance across dialogues between different speakers where the performance severely fluctuate. For example, the *Pomodoro technique* is sometimes explicitly mentioned by name, while in other cases it is implicitly described as *25 minutes on and 5 minutes off*. The fixed prompt cannot recognize such high-level semantic concepts, resulting in inconsistent extraction granularity. This discrepancy further degrades the overall performance and stability of the memory system.

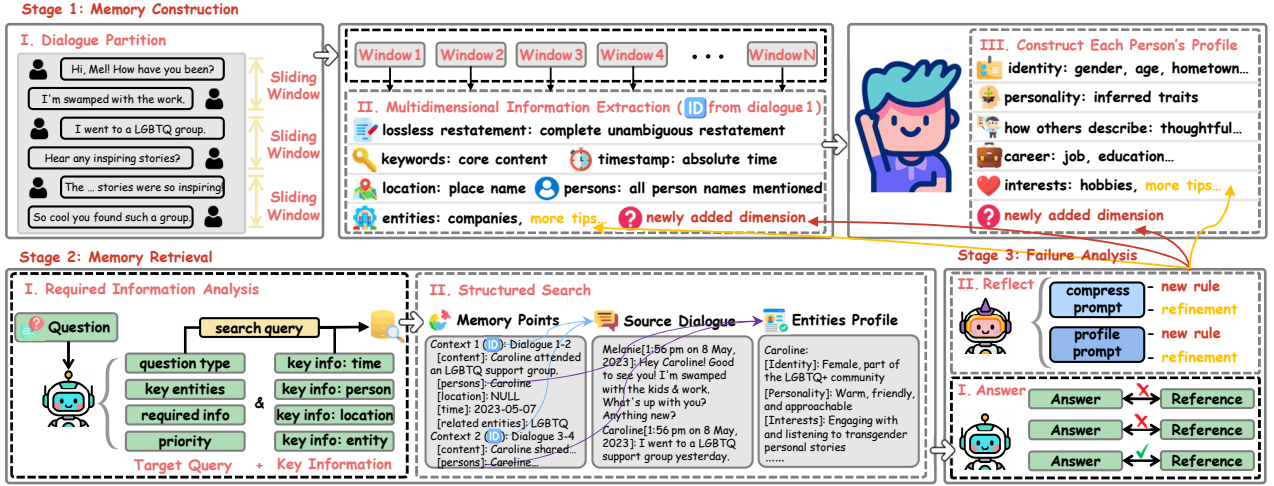


Figure 3: **Overview of TriMem.** It segments historical dialogue into windows, extracts multi-dimensional facts with traceable index, and constructs entity profiles. Relevant memories are retrieved according to queries, and prompts are continuously optimized via response feedback.

3 Method

In this section, we present TriMem, which constructs a three-level architecture, from raw dialogue to extracted key fact and integrated profiles (in Section 3.1). Specially, we construct index between raw dialogue and extracted fact to improve storage fidelity while keeping retrieval efficiency (in Section 3.2), integrate scattered facts to profiles to support understanding based reasoning (in Section 3.3), optimize prompts via failure case analysis to realize lifelong evolution (in Section 3.4).

3.1 Overall Pipeline

As shown in Figure 3, our framework consists of the following three core components: (1) Given a set of dialogue, we extract factual information and bind each fact with raw dialogue identifier and profile identifier to implement memory construction. (2) Given a question, the agent first analyzes the required information and keywords to generate search query. It then matches with extracted facts to retrieve relevant memory, and further obtains raw dialogues with full details and integrated profiles via predefined index to complete memory retrieval. (3) According to the reasoning performance, we invoke a powerful senior model to conduct failure analysis and provide revision suggestions for system prompts. In the following subsections, we will elaborate on these components in detail.

3.2 Dense Storage with Efficient Retrieval

Same as conventional systems, we also perform fact extraction on original dialogue. We first partition the raw dialogue $\mathcal{H}$ into a sequence of overlapping windows via a sliding window f_{seg} :

$$\mathcal{W} = f_{\text{seg}}(\mathcal{H}; l, s) = \{w_i\}_{i=1}^N, \quad w_i = \{(r_t, u_t)\}_{t=(i-1)s+1}^{\min(T, (i-1)s+l)}, \quad (1)$$

where l denotes the window size, s denotes the stride, and $N = \lceil (T - l)/s \rceil + 1$ is the total number of windows. The overlapping design ensures that contextually related utterances spanning window boundaries are not artificially severed, thereby preserving local coherence for subsequent extraction. For each window w_i , we employ an agent ϕ driven by extraction prompt $\mathbf{p}_e$, the extraction prompt is composed of a task instruction and a multi-dimensional schema:

$$\mathbf{p}_e = [\text{instruction} \parallel \text{schema} : \{f_{\text{restate}}, f_{\text{time}}, f_{\text{person}}, \dots\}], \quad (2)$$

where each dimension corresponds to a dedicated extraction function capturing a distinct semantic aspect of the dialogue content: f_{restate} performs lossless restatement to preserve complete and unambiguous factual content, f_{time} extracts absolute temporal references, f_{person} identifies all persons mentioned in the window, and additional dimensions such as location, keywords, and named entities can be flexibly incorporated into the schema. This extensible multi-dimensional design ensures that extraction covers diverse semantic granularities while remaining adaptable to domain-specific requirements. Each extracted entry is thus a structured tuple, *i.e.*, $e_i = (f_{\text{restate}}^{(i)}, f_{\text{time}}^{(i)}, f_{\text{person}}^{(i)}, \dots)$. Critically, unlike previous systems, we add an additional dimension f_{src} to the extraction prompt to obtain a source dialogue identifier $e_i.\text{src} \triangleq \{r_t, u_t \in w_i\}$ for each entry e_i to address the lossy storage problem. Given question q , the system first extracts a set of search query k_q from the question by analysing the required information and relevant keywords. The top- K most relevant entries are then retrieved from $\mathcal{E}$ through similarity matching over extracted fact $\mathcal{E}^*(q) = \text{top-}K_{e_i \in \mathcal{E}} \text{sim}(k_q, e_i)$. Each retrieved entry $e_i \in \mathcal{E}^*(q)$ can serve as an anchor to recover all original details by the source identifier. In this way, our system guarantees storage fidelity while keeping retrieval efficiency.

3.3 Scattered Fact with Integrated Profile

To address the shallow reasoning problem, we construct structured profiles over scattered fact. We first group extracted fact according to different person $p \in \mathcal{V}$:

$$\mathcal{E}_p = \{e_i \in \mathcal{E} \mid f_{\text{person}}^{(i)} = p\}, \quad \forall p \in \mathcal{V}, \quad (3)$$

where $\mathcal{V} = \bigcup_{i=1}^K f_{\text{person}}^{(i)}$ denotes the set of all identified persons. Then, driven by a profile prompt $\mathbf{p}_\psi$, the person-specific entries are integrated and synthesized into a structured profile $\text{Prof}(p) = \phi(\mathcal{E}_p, \mathbf{p}_\psi)$, which captures multi-faceted entity-level understanding, including identity attributes (*e.g.*, gender, age, hometown), inferred personality traits, career and educational background, interests and hobbies, as well as interpersonal dynamics and behavioral tendencies. Ultimately, also anchored by the retrieved entry, we can obtain integrated profiles during reasoning through the person identifier. In this way, we can provide agents with understanding over scattered facts to avoid shallow reasoning.

3.4 Lifelong Evolution with Optimized Prompt

In order to maintain the fine-grained consistency, we utilize TextGrad (Yuksekgonul et al., 2024) to optimize the prompts. Given the retrieved context $\mathcal{R}(q)$, the system generates a response via an answer generation prompt $\mathbf{p}_a$, whose output can be compared against reference answers a^* to obtain a quality signal. We leverage this failure signal to continuously optimize the upstream extraction prompt $\mathbf{p}_e$ and profile prompt $\mathbf{p}_\psi$, treating them as joint trainable parameters $\theta = (\mathbf{p}_e, \mathbf{p}_\psi) \in \Sigma^* \times \Sigma^*$, where Σ^* denotes the space of natural language strings. The complete optimization objective is:

$$\theta^* = \arg \min_{\theta} \mathbb{E}_{(q, a^*) \sim \mathcal{D}} [-\text{Score}_{\text{LLM}}(q, \text{LLM}(q, \mathcal{R}(q)), a^*)]. \quad (4)$$

where $\text{Score}_{\text{LLM}}$ evaluates answer quality via an LLM judge, compatible with metrics such as F1 and BLEU. Rather than numerical gradients, TextGrad backpropagates the loss through natural language editing suggestions given by LLM agent $\text{TextGrad}_{\text{LLM}}$:

$$\mathbf{g}_e, \mathbf{g}_\psi = \frac{\partial \mathcal{L}}{\partial \theta} = \text{TextGrad}_{\text{LLM}}(\mathcal{L}, \theta) \in \Sigma^*. \quad (5)$$

The prompts are then updated by applying these textual gradients as rewriting instructions: $\mathbf{p}_e^{(t+1)} = \mathbf{p}_e^{(t)} \oplus \mathbf{g}_e^{(t)}$, $\mathbf{p}_\psi^{(t+1)} = \mathbf{p}_\psi^{(t)} \oplus \mathbf{g}_\psi^{(t)}$, where $\oplus$ denotes the prompt editing operator. Through iterative

Table 1: **Performance on the LoCoMo benchmark with High-Capability Models.** TriMem achieves outstanding performance across different models while maintaining high efficiency.

Model	Method	MultiHop		Temporal		OpenDomain		SingleHop		Average		Token Cost
		BLEU	F1	BLEU	F1	BLEU	F1	BLEU	F1	BLEU	F1	
GPT-4.1-mini	LoCoMo	8.00	17.26	10.17	14.89	8.29	16.28	17.43	19.36	13.62	17.85	16863
	Naïve RAG	11.49	13.24	20.52	28.80	11.79	10.75	22.85	30.29	19.59	25.64	1119
	Mem0	28.81	31.44	35.41	46.24	18.51	17.93	31.25	35.34	30.88	35.81	1153
	MemoryOS	16.46	24.02	34.78	46.52	14.89	19.58	36.18	43.92	30.95	39.30	936
	A-Mem	15.11	20.66	41.57	50.94	11.18	13.20	38.25	43.72	33.01	39.10	1276
	LightMem	32.93	40.33	47.53	55.23	18.31	21.91	37.68	48.39	37.66	46.69	695
	SimpleMem	32.40	39.33	43.69	58.01	19.56	24.50	43.41	53.99	39.97	50.30	587
	Ours	35.20	42.59	49.56	64.72	36.86	43.88	45.25	55.36	43.79	54.26	1217
GPT-4o	LoCoMo	19.64	19.20	9.50	13.95	11.87	16.60	13.81	16.12	13.86	16.26	16863
	Naïve RAG	14.36	15.35	11.48	16.17	9.03	9.09	26.67	35.03	20.15	25.88	1119
	Mem0	25.52	32.36	32.48	42.70	14.50	18.50	30.02	39.84	28.74	37.74	1195
	MemoryOS	22.52	31.76	38.31	47.08	12.91	18.06	38.26	43.67	33.81	40.60	944
	A-Mem	20.90	26.12	35.39	48.64	10.74	12.33	37.11	42.08	32.14	38.67	1152
	LightMem	35.30	45.16	43.60	58.57	10.56	23.20	36.72	46.60	36.26	47.37	677
	SimpleMem	31.34	35.58	35.78	46.96	18.96	17.01	37.11	43.94	34.64	41.36	627
	Ours	40.36	46.00	51.39	60.41	39.27	50.15	40.61	47.78	42.73	50.23	1272
GPT-5-nano	LoCoMo	20.45	19.04	12.69	16.56	13.83	20.85	13.50	15.23	14.62	16.56	16863
	Naïve RAG	10.13	13.29	8.78	13.09	9.25	12.24	20.29	28.44	15.34	21.46	1119
	Mem0	22.55	28.58	35.52	48.82	18.33	16.75	28.99	35.65	28.51	35.92	1074
	MemoryOS	10.74	23.50	32.50	39.71	10.02	20.30	34.28	40.34	28.09	35.88	952
	A-Mem	15.54	20.11	27.23	32.43	10.86	12.55	27.26	31.91	24.09	28.65	1175
	LightMem	28.63	38.21	39.72	55.51	18.79	22.74	31.19	42.01	31.73	42.93	723
	SimpleMem	25.42	33.28	32.15	45.75	20.77	24.31	39.65	46.71	34.30	42.65	655
	Ours	34.86	45.25	42.45	57.05	33.55	40.52	54.26	62.88	46.96	57.04	1256

optimization, $\mathbf{p}_e$ progressively refines extraction granularity to retain semantically valuable details, while $\mathbf{p}_\psi$ improves its capacity to capture behavioral patterns and entity-level understanding, enabling our system to continuously evolve without manual prompt engineering.

4 Experiments

In this section, we provide comprehensive verification of TriMem. First, we introduce several critical parts of experimental setups (in Section 4.1). Second, we provide performance comparison and compatibility experiments of Entity Profile with different previous methods (in Section 4.2). Third, we conduct extensive ablation studies to better understand our TriMem (in Section 4.3).

4.1 Experimental Setups

Baselines and Benchmarks. We compare our method with Naive RAG and several competitive agent memory systems, including Mem0 (Chhikara et al., 2025), MemoryOS (Kang et al., 2025), A-Mem (Xu et al., 2025), LightMem (Fang et al., 2025), SimpleMem (Liu et al., 2026) and xMemory (Hu et al., 2026). For a fair comparison, we keep the original hyperparameter setups of the comparative methods. The evaluation is conducted in two commonly used benchmarks, LoCoMo (Maharana et al., 2024) and PerLTQA (Du et al., 2024). More details of each system are provided in Appendix A.

Implementation Details. We set the size of the window to 40 and stride to 38. The Qwen3-embedding-0.6b (Zhang et al., 2025b) model is utilized to encode the extracted fact. During retrieval, the maximum number of relevant entries is set to 25. The number of optimization rounds for prompts is set to 4 to enable in-depth reasoning. We perform prompt training on LoCoMo with Qwen3-8B model (Yang et al., 2025), and then directly apply the optimized prompts to other models

Table 2: **Performance on the LoCoMo benchmark with Efficient Models.** TriMem still achieves superior performance-efficiency balance with representative efficient models.

Model	Method	MultiHop		Temporal		OpenDomain		SingleHop		Average		Token Cost
		BLEU	F1	BLEU	F1	BLEU	F1	BLEU	F1	BLEU	F1	
Qwen3-8B	LoCoMo	12.67	20.54	12.32	18.55	10.59	14.39	19.76	23.78	16.34	21.51	16863
	Naïve RAG	13.75	15.83	8.86	13.53	9.68	10.77	21.57	28.76	16.75	22.10	1119
	Mem0	28.32	30.07	23.15	26.15	11.79	15.15	30.75	34.97	27.54	30.10	1140
	MemoryOS	14.38	22.72	18.67	22.79	11.06	13.52	25.65	33.52	21.22	28.06	911
	A-Mem	16.02	21.08	28.10	37.51	14.01	14.19	33.60	40.77	28.01	34.83	1180
	LightMem	22.84	32.54	37.62	48.37	18.05	19.02	23.03	31.37	25.73	34.36	740
	SimpleMem	23.39	30.39	24.66	34.51	14.04	15.39	35.73	41.26	29.81	36.25	608
	xMemory	28.44	39.13	28.65	35.41	17.76	21.57	40.66	50.57	34.49	43.51	2230
	Ours	33.09	41.22	38.71	53.13	30.59	37.64	45.10	52.52	40.66	49.65	1339
Llama-3.1-8B-Ins	LoCoMo	13.73	23.36	13.15	20.30	11.54	19.42	18.64	25.86	16.15	23.84	16863
	Naïve RAG	14.31	16.18	7.63	12.28	9.09	11.58	22.99	31.02	17.33	23.18	1119
	Mem0	13.27	16.40	8.26	12.62	7.45	8.45	21.75	31.28	16.49	23.24	1085
	MemoryOS	13.57	22.63	19.18	23.31	10.59	13.01	23.46	31.05	19.95	26.77	964
	A-Mem	15.80	22.84	23.79	36.19	11.19	12.51	31.19	37.86	25.58	33.18	1340
	LightMem	13.19	19.64	16.93	28.06	17.39	20.68	27.62	41.06	22.11	33.16	758
	SimpleMem	18.81	26.22	21.15	30.44	15.81	18.77	26.79	31.23	23.47	29.37	674
	xMemory	21.89	31.24	21.78	26.84	12.37	16.62	27.75	41.36	24.47	34.94	2375
	Ours	25.42	34.56	25.98	32.36	28.40	32.71	35.76	43.20	31.37	38.70	1388

Table 3: Performance comparison on the PerLTQA benchmark. All values report the LLM-judged correctness score (%), where gpt-4.1-mini evaluates whether each predicted answer matches the ground truth. TriMem achieves the best performance across different sub-tasks.

Method	Qwen3-8B				Llama-3.1-8B-Ins			
	Profile	Social Relationship	Events	Dialogues	Profile	Social Relationship	Events	Dialogues
Full-Context	65.80	56.72	52.75	18.51	52.46	54.58	47.54	17.27
Mem0	89.56	76.46	66.48	27.59	73.04	72.29	57.14	26.31
LightMem	64.93	78.00	73.03	47.01	53.85	74.08	69.21	44.72
SimpleMem	88.12	82.40	79.87	42.09	84.64	76.46	70.39	37.90
TriMem	92.46	83.23	85.72	55.79	92.17	82.28	78.17	45.01

and benchmark. The failure analysis is conducted by Claude Opus 4.6 (Anthropic, 2026). The prompts used in our experiments are provided in Appendix E.

4.2 Main Results

Performance on High-Capability Models. In Table 1, we compare representative agent memory systems to validate the effectiveness of TriMem. Results demonstrate that our method consistently outperforms prior approaches when integrated with various high-capability models, including GPT-4o (Hurst et al., 2024), GPT-4.1-mini (Achiam et al., 2023) and GPT-5-nano (Singh et al., 2025). Meanwhile, to illustrate the information density of TriMem, we report the average tokens consumption of retrieved contexts. It can be seen that our system only consumes around 1.2k tokens. Although retrieving raw dialogues and entity profiles slightly increases the token overhead, it brings substantial performance gains.

Compatibility with Efficient Models. To evaluate the capability of TriMem to support small-parameter efficient models, we conduct experiments on lightweight models including Qwen3-8B (Yang et al., 2025) and Llama-3.1-8B-Instruct (Grattafiori et al., 2024). As shown in Table 2, our system still achieves substantial performance improvements. Unlike xMemory (Hu et al., 2026), which only supports limited open-source models due to its requirement for model output logits, TriMem is compatible with models of various parameter sizes. This verifies the extensive superiority and broad applicability of our method.

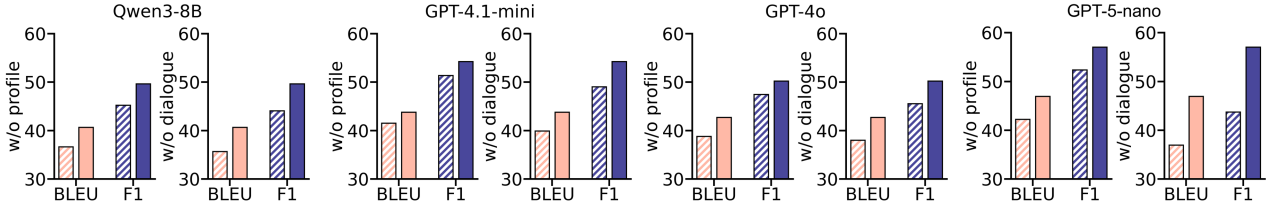


Figure 4: **Ablation of profile and raw dialogue module.** Incorporating entity profile and raw dialogue shows the best results, which demonstrates the rationality of our design.

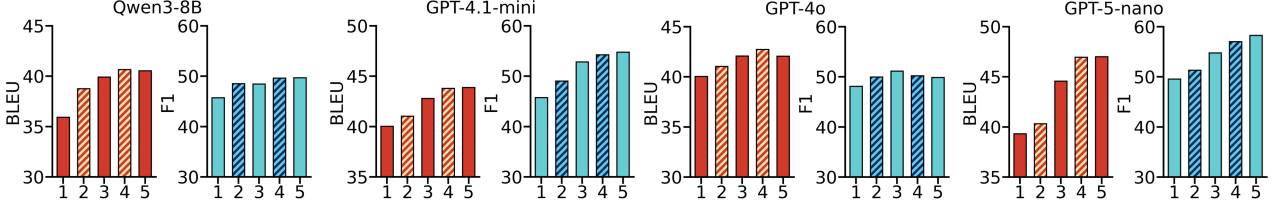


Figure 5: **Impact of varying evolution step.** Appropriate update steps lead to overall improvements, while further updates result in excessive refinement, which negatively affects the performance.

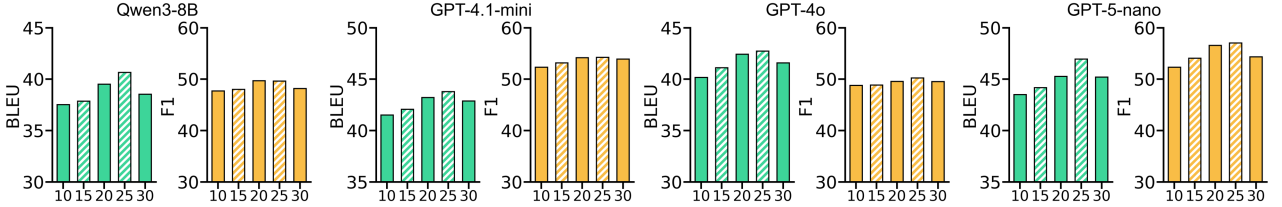


Figure 6: **Performance in different retrieval numbers.** The results show that the performance is optimal when the number is 25, and performance degrades when the number is too low or too high.

Generalization on Different Datasets. PerLTQA is also a widely adopted benchmark for long-term agent QA, consisting of multi-dimensional evaluations covering personal profiles, social relationship, historical events and dialogue memories. To comprehensively validate the effectiveness of our proposed method, we additionally report experimental results on this dataset (see Table 3), which demonstrates the strong generalization ability of TriMem.

4.3 Ablation and Further Analysis

Ablation of Profile and Raw Dialogue. To verify the necessity of entity profiles and raw dialogues for reasoning reliability and storage fidelity, we conduct ablation experiments on LoCoMo by removing these two contextual components. The results are presented in Figure 4, it can be seen that the agent suffers a noticeable performance drop when either component is excluded. This demonstrates that incorporating entity profiles and raw dialogues is a reasonable design which effectively boosts the overall capability of agent memory systems. More detailed results can be found in Appendix D.1.

Impact of Varying Evolution Step. We perform multi-step iterative evolution of prompt. To evaluate the impact of different evolution steps on overall system performance, we conduct an ablation study by increasing the number of update steps from 1 to 5. As shown in Figure 5, the performance gradually improves with the increase of evolution steps, and reaches the optimal level when the number of steps is set to 4. Further updates lead to excessive refinement of the prompt’s granularity, which may exceed the model’s capability boundary and result in performance degradation. Therefore, we set the number of evolution steps to 4. Visualization of update process can be found in Appendix D.2.

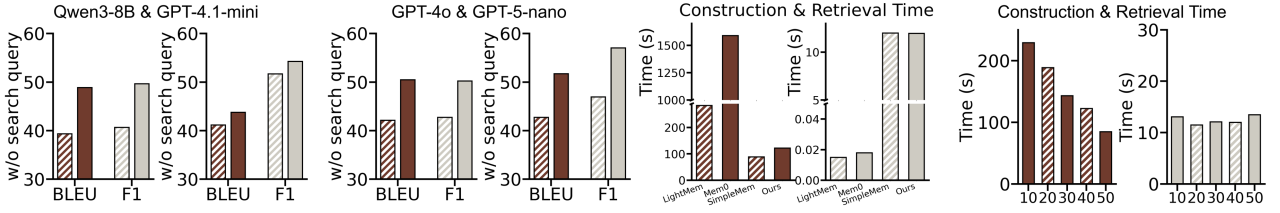


Figure 7: **Necessity of search query and efficiency analysis.** Although the introduction of search query increases the retrieval time, it greatly improve the system performance. The smaller window size increase the memory construction time, therefore we set the size to 40 to maintain the efficiency, which enabling competitive construction time comparing with previous methods.

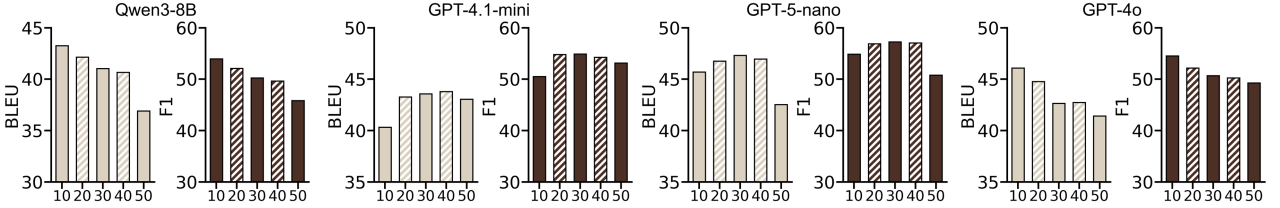


Figure 8: **Ablation of window size.** The memory system can also achieve great performance with smaller size. However, considering the efficiency, we finally set the window size to 40.

Performance in Different Retrieval Numbers. In Figure 6, we present the performance of our method when retrieving different numbers of memory entries. It can be observed that when the number of retrieved memory entries is too low, key information may fail to be effectively retrieved, resulting in suboptimal performance. When the number of retrieved entries is excessively high, irrelevant redundant information is likely to be introduced, interfering with model reasoning and leading to performance degradation. Overall, setting the number of retrieved memory entries to 25 is a reasonable choice. Visualization of the retrieved memory entries can be found in Appendix D.3.

Necessity of Search Query. In the retrieval phase, instead of directly relying on the original question for retrieval, we prompt the agent to first analyze the required information and keywords of the question, and then perform retrieval based on the analysis results. To verify the necessity of this module, we compare the system performance with and without search query in Figure 7. The experimental results show that although the generation process of search query increase the retrieval time, the performance is significantly improved after adding the search query, indicating that the search query helps the model achieve more accurate retrieval, thus confirming the necessity of this module. We show some obtained search queries of different questions in Appendix D.4.

Comparison with Diverse Window Size. To compare the system performance under different window sizes, we present the performance comparison with various window settings in Figure 8. It can be observed that, although the model can also achieve good performance with smaller windows, the number of communications with the agent significantly increases. As shown on the right side of Figure 7, although the inference time is not affected, the memory construction time highly extends. Therefore, to balance system performance and efficiency, we finally set the window size to 40. Examples of information extraction under different window sizes can be found in Appendix D.5.

5 Related Work

Memory Systems for LLM Agents. Long-term memory has emerged as a key capability for LLM agents engaged in multi-session interactions, with most existing systems organized around three functional stages: memory construction, memory retrieval, and memory-supported reasoning. For memory construction, Mem0 (Chhikara et al., 2025), A-Mem (Xu et al., 2025), and MemoryOS (Kang

et al., 2025) prompt LLMs to extract atomic facts from dialogues and consolidate them via dynamic updates or hierarchical stores. For memory retrieval, methods from Naive RAG (Lewis et al., 2020) to xMemory (Hu et al., 2026) match queries with fact embeddings through similarity search. For memory-supported reasoning, retrieved facts are concatenated into the prompt as contextual supplements (Liu et al., 2026; Fang et al., 2025). Despite their differences, these systems share a common design choice: extracted facts serve as the atomic unit across all three stages, *i.e.*, what is stored, what is matched, and what is injected into the prompt. This fact-centric pipeline risks losing fidelity to the original dialogue and limits the agent’s ability to handle queries that require holistic understanding rather than discrete fact lookup. In contrast, our work revisits the role of each stage, establishing index between extracted facts and source dialogues to ensure storage fidelity and constructing entity profiles from these facts to support comprehension-oriented reasoning that goes beyond fact recall. This perspective also clarifies why the three stages should not be designed in isolation: the granularity of what is stored constrains what can be retrieved, and the granularity of what is retrieved in turn dictates the kind of reasoning the agent can perform downstream. Treating the three stages as a single pipeline with consistent yet multi-level representations, rather than three independently optimized modules over the same atomic unit, is therefore central to our design.

Lifelong Evolution Agents. Lifelong evolution has emerged as a key capability for LLM agents that need to improve from accumulated experience over long horizons. One prominent line formulates memory management as a reinforcement learning problem: MemAgent (Yu et al., 2025a) reshapes long-context LLMs into multi-conversation memory agents, MemBuilder (Shen et al., 2026) reinforces memory construction with attributed dense rewards, AgentFold (Ye et al., 2025) learns proactive context management for long-horizon web agents, MemGen (Zhang et al., 2025a) weaves generative latent memories into self-evolving agents, and MEM1 (Zhou et al., 2025) jointly synergizes memory and reasoning for efficient execution. While effective, these methods all require RL-based parameter updates that disrupt the original pretrained weights, incur substantial training cost, and are impractical when only API-accessible models are available. Motivated by these limitations, a complementary line pursues lifelong evolution without altering model parameters: Voyager (Wang et al., 2023) maintains a skill library of executable code, ExpeL (Zhao et al., 2024) distills cross-task experience into natural-language rules, and MemSkill (Zhang et al., 2026) learns task-agnostic skill memories that transfer to unseen tasks. In line with this paradigm, our work applies TextGrad (Yuksekgonul et al., 2024) to evolve the fact extraction and entity profile construction prompts, achieving lifelong adaptability without tuning parameters. Compared with skill or rule based externalizations that target the agent’s action space, prompt-level evolution directly reshapes how raw experience is parsed into memory, which is particularly suited to memory systems whose behavior is largely determined by the extraction and synthesis prompts rather than by a fixed policy network.

6 Conclusion

In this work, we revisit the design of memory systems for LLM agents and identify three concrete limitations of the prevailing extracted fact based paradigm: lossy storage, shallow reasoning, and suboptimal prompts under heterogeneous dialogue styles. Motivated by these findings, we propose TriMem, which maintains three coexisting representation granularities, including verbatim dialogues for storage fidelity, atomic facts for retrieval efficiency and progressively synthesized profiles for deep reasoning. TextGrad-based prompt optimization is further employed to evolve the extraction and profile construction prompts from accumulated experience, enabling lifelong adaptation without modifying the underlying model parameters and thus remaining applicable to API-only LLMs. Extensive experiments on LoCoMo and PerLTQA across various LLMs confirm the effectiveness of our method. We hope TriMem can bring new insights for future researches on agent memory system.

References

- Achiam, J., Adler, S., Agarwal, S., Ahmad, L., Akkaya, I., Aleman, F. L., Almeida, D., Altenschmidt, J., Altman, S., Anadkat, S., et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- Acikgoz, E. C., Qian, C., Ji, H., Hakkani-Tür, D., and Tur, G. Self-improving llm agents at test-time. *arXiv preprint arXiv:2510.07841*, 2025.
- Anthropic. Claude opus 4.6 system card. Technical report, Anthropic, February 2026. URL <https://www.anthropic.com/claude-opus-4-6-system-card>.
- Chhikara, P., Khant, D., Aryan, S., Singh, T., and Yadav, D. Mem0: Building production-ready ai agents with scalable long-term memory. *arXiv preprint arXiv:2504.19413*, 2025.
- Du, Y., Wang, H., Zhao, Z., Liang, B., Wang, B., Zhong, W., Wang, Z., and Wong, K.-F. Perltqa: A personal long-term memory dataset for memory classification, retrieval, and fusion in question answering. In *Proceedings of the 10th SIGHAN Workshop on Chinese Language Processing (SIGHAN-10)*, pp. 152–164, 2024.
- Fang, J., Deng, X., Xu, H., Jiang, Z., Tang, Y., Xu, Z., Deng, S., Yao, Y., Wang, M., Qiao, S., et al. Lightmem: Lightweight and efficient memory-augmented generation. *arXiv preprint arXiv:2510.18866*, 2025.
- Grattafiori, A., Dubey, A., Jauhri, A., Pandey, A., Kadian, A., Al-Dahle, A., Letman, A., Mathur, A., Schelten, A., Vaughan, A., et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Hu, Z., Zhu, Q., Yan, H., He, Y., and Gui, L. Beyond rag for agent memory: Retrieval by decoupling and aggregation. *arXiv preprint arXiv:2602.02007*, 2026.
- Huang, X., Liu, W., Chen, X., Wang, X., Wang, H., Lian, D., Wang, Y., Tang, R., and Chen, E. Understanding the planning of llm agents: A survey. *arXiv preprint arXiv:2402.02716*, 2024.
- Hurst, A., Lerer, A., Goucher, A. P., Perelman, A., Ramesh, A., Clark, A., Ostrow, A., Welihinda, A., Hayes, A., Radford, A., et al. Gpt-4o system card. *arXiv preprint arXiv:2410.21276*, 2024.
- Kang, J., Ji, M., Zhao, Z., and Bai, T. Memory os of ai agent. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pp. 25972–25981, 2025.
- Lewis, P., Perez, E., Piktus, A., Petroni, F., Karpukhin, V., Goyal, N., Küttler, H., Lewis, M., Yih, W.-t., Rocktäschel, T., et al. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in neural information processing systems*, 33:9459–9474, 2020.
- Li, X., Wang, S., Zeng, S., Wu, Y., and Yang, Y. A survey on llm-based multi-agent systems: workflow, infrastructure, and challenges. *Vicinagearth*, 1(1):9, 2024.
- Liu, J., Su, Y., Xia, P., Han, S., Zheng, Z., Xie, C., Ding, M., and Yao, H. Simplemem: Efficient lifelong memory for llm agents. *arXiv preprint arXiv:2601.02553*, 2026.
- Maharana, A., Lee, D.-H., Tulyakov, S., Bansal, M., Barbieri, F., and Fang, Y. Evaluating very long-term conversational memory of llm agents. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 13851–13870, 2024.
- Qin, Y., Ye, Y., Fang, J., Wang, H., Liang, S., Tian, S., Zhang, J., Li, J., Li, Y., Huang, S., et al. Ui-tars: Pioneering automated gui interaction with native agents. *arXiv preprint arXiv:2501.12326*, 2025.

- Shen, Z., Wu, Z., Lai, F., Lian, S., and Rao, Y. Membuilder: Reinforcing llms for long-term memory construction via attributed dense rewards. *arXiv preprint arXiv:2601.05488*, 2026.
- Sheng, L., Zhang, Y., Ma, W., Shi, Y., Huang, T., Wang, X., Zhang, A., Shen, K., and Chua, T.-S. When to memorize and when to stop: Gated recurrent memory for long-context reasoning. *arXiv preprint arXiv:2602.10560*, 2026.
- Singh, A., Fry, A., Perelman, A., Tart, A., Ganesh, A., El-Kishky, A., McLaughlin, A., Low, A., Ostrow, A., Ananthram, A., et al. Openai gpt-5 system card. *arXiv preprint arXiv:2601.03267*, 2025.
- Tian, H., Feng, X., Zhao, Z., Zhu, X., Yan, R., and Han, B. Multi-agent debate with memory masking. *arXiv preprint arXiv:2603.20215*, 2026.
- Wang, G., Xie, Y., Jiang, Y., Mandlekar, A., Xiao, C., Zhu, Y., Fan, L., and Anandkumar, A. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023.
- Xu, W., Liang, Z., Mei, K., Gao, H., Tan, J., and Zhang, Y. A-mem: Agentic memory for llm agents. *arXiv preprint arXiv:2502.12110*, 2025.
- Yan, S., Yang, X., Huang, Z., Nie, E., Ding, Z., Li, Z., Ma, X., Bi, J., Kersting, K., Pan, J. Z., et al. Memory-rl: Enhancing large language model agents to manage and utilize memories via reinforcement learning. *arXiv preprint arXiv:2508.19828*, 2025.
- Yang, A., Li, A., Yang, B., Zhang, B., Hui, B., Zheng, B., Yu, B., Gao, C., Huang, C., Lv, C., et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- Ye, R., Zhang, Z., Li, K., Yin, H., Tao, Z., Zhao, Y., Su, L., Zhang, L., Qiao, Z., Wang, X., et al. Agentfold: Long-horizon web agents with proactive context management. *arXiv preprint arXiv:2510.24699*, 2025.
- Yu, H., Chen, T., Feng, J., Chen, J., Dai, W., Yu, Q., Zhang, Y.-Q., Ma, W.-Y., Liu, J., Wang, M., et al. Memagent: Reshaping long-context llm with multi-conv rl-based memory agent. *arXiv preprint arXiv:2507.02259*, 2025a.
- Yu, M., Meng, F., Zhou, X., Wang, S., Mao, J., Pan, L., Chen, T., Wang, K., Li, X., Zhang, Y., et al. A survey on trustworthy llm agents: Threats and countermeasures. In *Proceedings of the 31st ACM SIGKDD Conference on Knowledge Discovery and Data Mining V. 2*, pp. 6216–6226, 2025b.
- Yuksekgonul, M., Bianchi, F., Boen, J., Liu, S., Huang, Z., Guestrin, C., and Zou, J. Textgrad: Automatic “differentiation” via text. *arXiv preprint arXiv:2406.07496*, 2024.
- Zhang, G., Fu, M., and Yan, S. Memgen: Weaving generative latent memory for self-evolving agents. *arXiv preprint arXiv:2509.24704*, 2025a.
- Zhang, H., Long, Q., Bao, J., Feng, T., Zhang, W., Yue, H., and Wang, W. Memskill: Learning and evolving memory skills for self-evolving agents. *arXiv preprint arXiv:2602.02474*, 2026.
- Zhang, Y., Li, M., Long, D., Zhang, X., Lin, H., Yang, B., Xie, P., Yang, A., Liu, D., Lin, J., et al. Qwen3 embedding: Advancing text embedding and reranking through foundation models. *arXiv preprint arXiv:2506.05176*, 2025b.
- Zhao, A., Huang, D., Xu, Q., Lin, M., Liu, Y.-J., and Huang, G. Expel: Llm agents are experiential learners. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pp. 19632–19642, 2024.

Zhou, Z., Qu, A., Wu, Z., Kim, S., Prakash, A., Rus, D., Zhao, J., Low, B. K. H., and Liang, P. P. Mem1: Learning to synergize memory and reasoning for efficient long-horizon agents. *arXiv preprint arXiv:2506.15841*, 2025.

Appendix

A	Details about Baselines and Benchmarks	16
B	More Experimental Details	18
B.1	Retrieval Efficiency	18
B.2	Storage Completeness	18
B.3	Reasoning Performance	18
C	Discussion	19
C.1	Limitation and Future Work	19
C.2	Broader Impact	19
D	Additional Experimental Results	20
D.1	Ablation of Profile and Raw Dialogue	20
D.2	Visualization of Prompt Evolution	21
D.3	Content of Retrieval Entries	22
D.4	Example of Search Query	23
D.5	Performance of Different Window Size	24
E	System Prompts	25
E.1	Prompt for Memory Extraction	25
E.2	Prompt for Profile Construction	29
E.3	Prompt for Target Query Generation	30
E.4	Prompt for Key Information Analysis	32
E.5	Prompt for Question Reasoning	33
E.6	Prompt for LLM Judge	36
E.7	Prompt for Prompts Evolution	38

Reproducibility Statement

To ensure the reproducibility of the experimental results, we provide the source code on this anonymous link: <https://anonymous.4open.science/r/TriMem>. In the following, we summarize some critical factors that facilitate reproduction.

- **Datasets.** The datasets we used are all publicly accessible, which is introduced in Section 4.1. Following previous work, we test four QA categories on LoCoMo, including MultiHop, Temporal, OpenDomain and SingleHop.
- **Assumption.** We set up our experiments to agent memory scenario, where a well-pretrained open-source or close-source large language model is available. At every moment, the agent receives a piece of information. It needs to store it in the memory module to assist with potential future reasoning. During the memory process, the agent cannot obtain the relevant information of the problem, it can only rely on the analysis of the original information for memory storage.
- **Environment.** All experiments are conducted on NVIDIA 4090-24GB GPUs with Python 3.10.

A Details about Baselines and Benchmarks

In this section, we provide details about the baselines and corresponding hyperparameters, as well as other related benchmarks that are used in our work.

Full-Context (LoCoMo) (Maharana et al., 2024). The entire conversation history is concatenated and fed directly into the LLM’s context window as a single long prompt, without any compression or retrieval. This approach serves as an accuracy upper bound since the model has access to all available information, but it incurs prohibitively high token costs and latency that scale linearly with conversation length, rendering it impractical for real-world long-horizon deployments.

Naive RAG (Lewis et al., 2020). All dialogue turns are chunked into fixed-size segments, embedded using a text encoder, and indexed in a vector store. At inference time, the top- k most similar chunks to the current query are retrieved by cosine similarity and concatenated into the prompt for answer generation. No memory consolidation, update, or deletion is performed; the retrieved context is the raw stored text.

Mem0 (Chhikara et al., 2025). Mem0 is a scalable memory-centric architecture that dynamically extracts, consolidates, and retrieves salient information from ongoing multi-session conversations. For each new message pair, an LLM extraction function identifies candidate facts, which are then compared against existing memories to determine whether to ADD, UPDATE, DELETE, or NOOP. Retrieved memories are prepended to the prompt at inference time. An enhanced variant, Mem0^g, further represents memories as nodes in a directed graph to capture relational structures among conversational elements.

MemoryOS (Kang et al., 2025). MemoryOS draws inspiration from operating system memory management to propose a hierarchical storage architecture for AI agents, comprising short-term memory (STM), mid-term memory (MTM), and long-term personal memory (LPM). STM-to-MTM updates follow a dialogue-chain-based FIFO principle, while MTM-to-LPM promotion uses a segmented page organization strategy with a heat-score mechanism that balances visit frequency and recency. A persona module captures evolving user preferences through personalized trait extraction.

A-Mem (Xu et al., 2025). A-Mem is an agentic memory system inspired by the Zettelkasten method, which organizes memories as dynamically interlinked notes rather than fixed schema. When a new memory is added, the system generates a comprehensive note with structured at-

tributes—contextual descriptions, keywords, and tags—then analyzes the historical memory repository to establish semantic links with relevant prior notes. A memory evolution mechanism allows newly integrated memories to trigger updates to the contextual representations of existing notes, enabling the memory network to continuously refine its organization.

LightMem (Fang et al., 2025). LightMem is an efficiency-oriented memory system modeled after the Atkinson-Shiffrin human memory model. It organizes memory into three complementary stages: a cognition-inspired sensory memory that filters irrelevant content via lightweight compression and groups it by topic; a topic-aware short-term memory that consolidates topic-based groups into structured summaries; and a long-term memory with sleep-time update that decouples consolidation from online inference through an asynchronous offline process. LightMem is designed to dramatically reduce token usage and API calls while maintaining competitive QA accuracy.

SimpleMem (Liu et al., 2026). SimpleMem is an efficient lifelong memory framework built on semantic lossless compression. It adopts a three-stage pipeline: (1) Semantic Structured Compression, which applies entropy-aware filtering to distill raw dialogues into compact, multi-view indexed memory units with resolved coreferences and absolute timestamps; (2) Online Semantic Synthesis, an intra-session process that integrates related units into higher-level abstract representations to eliminate redundancy; and (3) Intent-Aware Retrieval Planning, which infers search intent to dynamically determine retrieval scope and construct precise context efficiently. Memory is indexed using dense semantic embeddings, sparse BM25, and SQL-based metadata storage.

xMemory (Hu et al., 2026). xMemory addresses the mismatch between standard RAG assumptions and the properties of agent memory, which forms a bounded, coherent dialogue stream with high inter-chunk correlation rather than a diverse heterogeneous corpus. It builds a hierarchy of intact memory units and maintains a high-level node organization via a sparsity-semantics objective that guides memory split and merge operations. At inference time, xMemory retrieves top-down, first selecting a compact, diverse set of themes and semantic summaries for multi-fact queries, then expanding to episodes and raw messages only when doing so reduces the reader’s uncertainty.

LoCoMo (Maharana et al., 2024). LoCoMo is a benchmark for evaluating very long-term conversational memory in LLM agents. Conversations are constructed via a machine-human hybrid pipeline in which LLM-based agents, grounded on persona statements and temporal event graphs, generate multi-session dialogues that are subsequently verified and edited by human annotators. Each conversation spans up to 35 sessions with an average of 300 turns and 9K tokens. The evaluation suite covers three tasks: question answering (with five reasoning categories: single-hop, multi-hop, temporal, open-domain, and adversarial), event graph summarization, and multi-modal dialogue generation.

PerLTQA (Du et al., 2024). PerLTQA is a personalized long-term memory QA benchmark inspired by the cognitive psychology distinction between semantic and episodic memory. The dataset covers several memory types, including character profiles, social relationships, events, dialogues and contains 8,593 questions across 30 characters. Evaluation is structured around three subtasks: Memory Classification (determining which memory type is relevant to a query), Memory Retrieval (fetching pertinent memory entries), and Memory Synthesis (generating a final answer by fusing retrieved memories). The benchmark specifically probes the interaction among different memory types, which prior work had largely overlooked.

B More Experimental Details

In Section 2, we analyse the limitation of existing agent memory systems, we provide the details of these experiments here.

B.1 Retrieval Efficiency

For retrieval efficiency experiment, following the setting of SimpleMem, we compute the embedding of extracted lossless restatements for the extracted fact based retrieval. For full-context based retrieval, we split raw dialogues into 5-turn chunks and embed the text of each chunk. When retrieving the top-k entries, we collect all covered dialogue IDs and check whether these retrieved IDs intersect with the ground-truth evidence dialogue IDs. We adopt the standard Hit@k metric as follows:

$$\text{Hit}@k = \frac{1}{|Q|} \sum_{q \in Q} \mathbb{1}[(\text{cov}_k(q) \cap E_q) \neq \emptyset], \quad (6)$$

where Q is the set of all questions on LoCoMo, E_q and $\text{cov}_k(q)$ is the dialogue IDs of ground-truth evidence and retrieved entries perspective. We set $k = 5$ when conducting experiments.

B.2 Storage Completeness

For the storage completeness experiment, we first tokenize the reference answer of each QA sample and retain only content tokens by removing stopwords. We then construct the token set of the full raw dialogue and the token set of extracted facts, and compute their coverage ratio over the token set of the reference answer:

$$\text{Cov}_H = \frac{|\text{required_tokens} \cap H|}{|\text{required_tokens}|}, \quad (7)$$

where H is the token set of raw dialogue or extracted facts.

B.3 Reasoning Performance

For the reasoning performance experiment on questions requiring different numbers of evidence, we first filter out samples with retrieval failure based on the results of the retrieval efficiency experiment. We then separately evaluate the reasoning performance of questions with exactly one evidence and those with more than one evidence. The results demonstrate that even if scattered individual facts are successfully retrieved, the model still struggles to answer complex synthetic questions that require multi-fact fusion and reasoning.

For the reasoning performance experiment on questions over dialogues between different users, we just compare the reasoning performance of different samples as each sample was constructed on the dialogues between different users in LoCoMo.

C Discussion

C.1 Limitation and Future Work

In this paper, we have systematically identified three critical limitations of the prevailing extracted fact based paradigm in agent memory systems, including lossy storage, shallow reasoning, and sub-optimal prompts under heterogeneous dialogue styles. Meanwhile, we have conducted an in-depth discussion and revealed the potential advantages of maintaining three coexisting representation granularities, including raw dialogues, extracted facts, and synthesized profiles, for balancing storage fidelity, retrieval efficiency, and reasoning quality. However, it is undeniable that the research findings presented in this paper still have certain limitations.

Firstly, although the current implementation of entity profile construction has been able to achieve relatively satisfactory results in supporting deep reasoning, there is still room for further exploration. Specifically, is it possible to further extend the profile construction beyond person-level entities to higher-order relational structures, such as event chains, social networks, or temporal trajectories, so as to achieve more comprehensive semantic understanding? This question points out a new exploration direction for future researches.

In addition, the TextGrad-based prompt optimization strategy we proposed is mainly constructed based on response-level feedback signals. In future researches, the focus can be placed on providing more precise and fine-grained optimization mechanisms, such as incorporating intermediate retrieval feedback or step-wise reasoning trajectory supervision, so as to further improve and optimize the lifelong evolution capability of the memory system.

C.2 Broader Impact

As a fundamental capability for LLM agents, the design of memory systems that can faithfully store, efficiently retrieve, and deeply reason over accumulated dialogue history is of paramount importance for the successful deployment of reliable agent applications in real-world scenarios. Especially in long-horizon interaction fields such as personalized assistants, healthcare consultation, and educational tutoring, the loss of key historical information or the inability to integrate scattered facts is highly likely to lead to unreliable responses with serious consequences. In view of this, it is particularly necessary and urgent to enhance the comprehensive capability of memory systems on long-term dialogue data.

Our research highlights a crucial yet long-overlooked issue in existing agent memory systems: these methods typically rely solely on extracted atomic facts as the unit across storage, retrieval, and reasoning stages. Such a fact-centric paradigm is likely to inadvertently cause information loss and shallow reasoning over scattered facts.

To address this problem, the method we proposed ingeniously establishes a three-level architecture that maintains coexisting representation granularities. Specifically, by leveraging traceable indices to raw dialogues for storage fidelity and synthesized profiles for understanding-aided reasoning, it effectively eliminates the adverse effects of lossy compression and isolated factual pieces. A series of comprehensive and in-depth experiments have fully verified the effectiveness and good compatibility of this method across diverse model backbones and benchmarks, strongly indicating that the tri-granularity memory architecture we designed is a highly promising new paradigm that can effectively support long-term agent interactions. This achievement undoubtedly provides a new perspective and profound insights for future research in the field of agent memory systems, and is expected to drive further development and innovation in this field.

D Additional Experimental Results

D.1 Ablation of Profile and Raw Dialogue

This section provides detailed quantitative results of the ablation experiments for entity profiles and raw dialogues, complementing the summary results in the main text. All experiments are conducted on the LoCoMo dataset, covering four typical task types: MultiHop, Temporal, OpenDomain, and SingleHop. Two key evaluation metrics are adopted: BLEU and F1-score. We compare the performance of our full TriMem model (Ours) with its ablation variants that remove entity profiles (w/o profile) or raw dialogues (w/o dialogue), across four backbone models (GPT-4.1-mini, GPT-4o, GPT-5-nano, and Qwen3-8B) to ensure the generalization of our conclusions. Table 4 presents the detailed ablation results of removing entity profiles. It can be observed that the performance of all backbone models degrades significantly when entity profiles are excluded, which fully confirms the necessity of entity profiles for enhancing reasoning reliability. Table 5 presents the detailed ablation results of removing raw dialogues. Consistent with the entity profile ablation, removing raw dialogues also leads to a noticeable performance decline across all backbone models, which confirms the necessity of raw dialogues for ensuring storage fidelity and supplementing fine-grained information.

Table 4: Detailed results of entity profile ablation study.

Model	Method	MultiHop		Temporal		OpenDomain		SingleHop		Average	
		BLEU	F1	BLEU	F1	BLEU	F1	BLEU	F1	BLEU	F1
GPT-4.1-mini	w/o profile	30.92	39.01	48.35	57.80	27.03	34.31	44.12	55.03	41.52	51.38
	Ours	35.20	42.59	49.56	64.72	36.86	43.88	45.25	55.36	43.79	54.26
GPT-4o	w/o profile	38.98	43.55	46.52	57.16	26.24	40.63	37.26	45.85	38.82	47.46
	Ours	40.36	46.00	51.39	60.41	39.27	50.15	40.61	47.78	42.73	50.23
GPT-5-nano	w/o profile	30.64	41.29	38.41	52.90	25.48	32.36	49.55	58.18	42.26	52.38
	Ours	34.86	45.25	42.45	57.05	33.55	40.52	54.26	62.88	46.96	57.04
Qwen3-8B	w/o profile	32.36	36.68	38.43	50.56	28.02	38.16	37.82	46.89	36.34	45.24
	Ours	33.09	41.22	38.71	53.13	30.59	37.64	45.10	52.52	40.66	49.65

Table 5: Detailed results of raw dialogue ablation study.

Model	Method	MultiHop		Temporal		OpenDomain		SingleHop		Average	
		BLEU	F1	BLEU	F1	BLEU	F1	BLEU	F1	BLEU	F1
GPT-4.1-mini	w/o dialogue	31.88	39.20	48.66	57.25	30.61	39.50	40.34	50.26	39.92	49.02
	Ours	35.20	42.59	49.56	64.72	36.86	43.88	45.25	55.36	43.79	54.26
GPT-4o	w/o dialogue	37.61	41.34	50.19	59.98	30.19	41.11	34.37	42.00	38.00	45.57
	Ours	40.36	46.00	51.39	60.41	39.27	50.15	40.61	47.78	42.73	50.23
GPT-5-nano	w/o dialogue	31.23	38.46	49.50	58.37	25.08	30.71	35.44	41.45	36.95	43.76
	Ours	34.86	45.25	42.45	57.05	33.55	40.52	54.26	62.88	46.96	57.04
Qwen3-8B	w/o dialogue	32.93	40.33	35.04	48.08	20.94	36.59	38.53	44.64	35.68	44.07
	Ours	33.09	41.22	38.71	53.13	30.59	37.64	45.10	52.52	40.66	49.65

D.2 Visualization of Prompt Evolution

In this section, we visualize three concrete TextGrad-style evolution traces, each showing how a specific failure case in early rounds drove the addition of a tip to the extraction prompt or profile-construction prompt. It can be seen that the prompts become increasingly detailed, such as normalizing temporal references to absolute dates, avoiding multi-fact dialogues collapse into single summary entry and keep exact adjectives when construct profile.

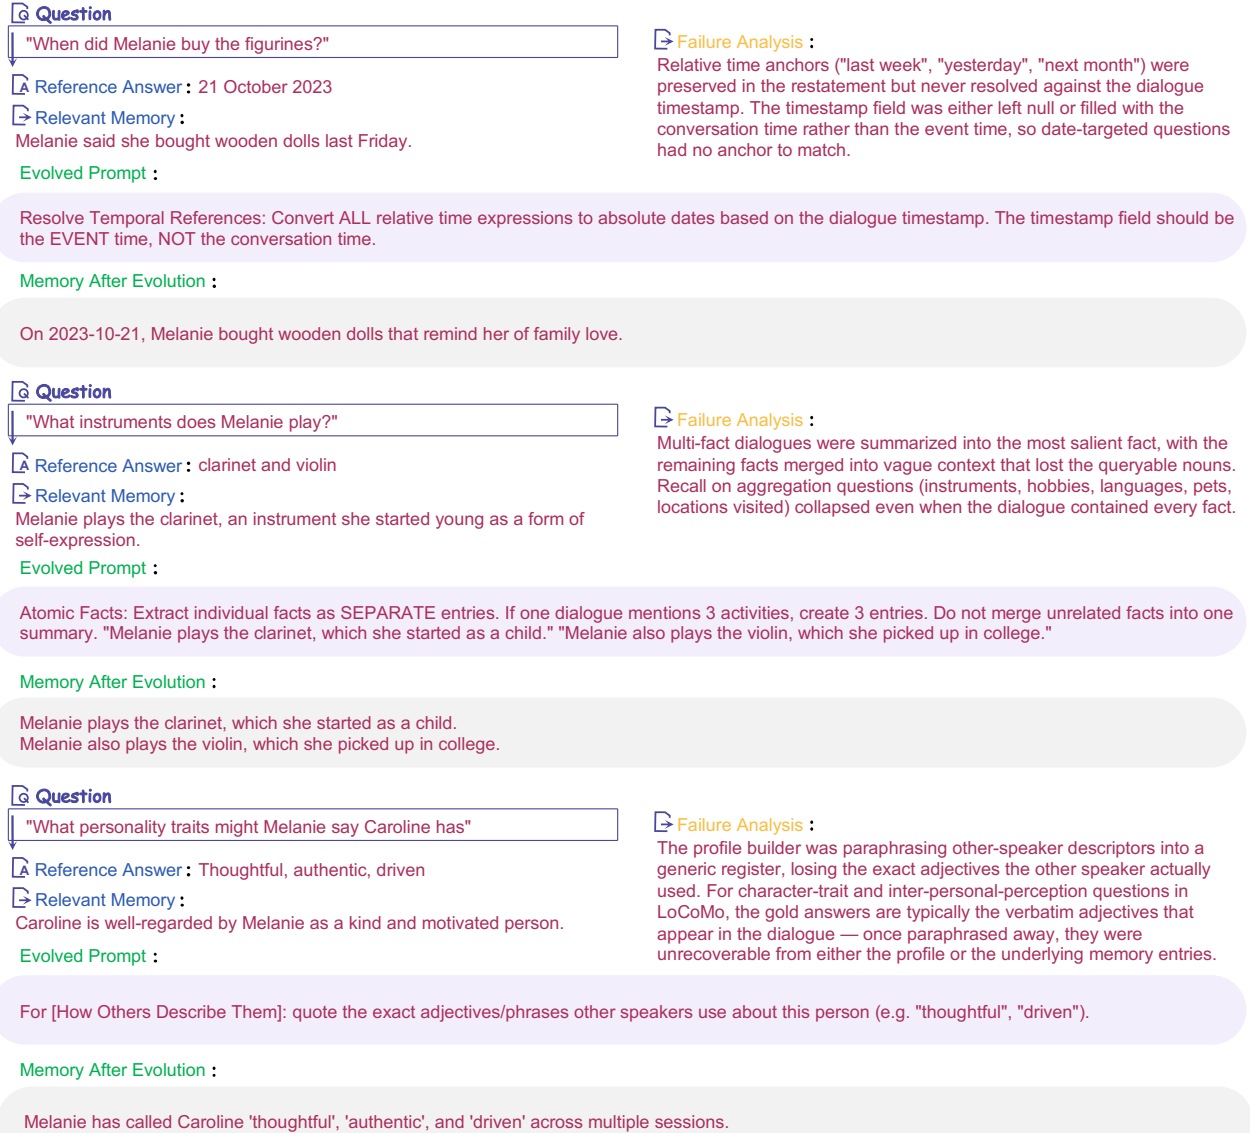


Figure 9: **Visualization of prompt evolution.** As evolution progresses, the prompts become more refined.

D.3 Content of Retrieval Entries

In this section, we visualize the content of the retrieval entries, the most relevant entries have been marked with star. It can be seen that our system can precisely retrieve relevant memory to support agent reasoning.

Question "What does Caroline's necklace symbolize?" Reference Answer: love, faith, and strength ★ Retrieval1: Caroline owns a necklace with a cross and a heart that was a gift from her grandmother in Sweden, given when Caroline was young, symbolizing love, faith, and strength as of 27 June 2023. Retrieval2: Sunflowers symbolize warmth and happiness, and roses symbolize love and beauty according to Caroline. Retrieval3: Caroline values a rainbow flag mural with a large eagle painted on a building as a symbol of courage, strength, freedom, and pride of the trans community and her own resilience. Retrieval4: Caroline drew a drawing of a woman in a dress symbolizing freedom and being real, representing a reminder to stay true to herself and embrace her womanhood. Retrieval5: Caroline created a painted sidewalk artwork with a rainbow design for a local church to symbolize time changing lives and to represent Caroline's journey as a transgender woman.	Question "What did the posters at the poetry reading say?" Reference Answer: Trans Lives Matter ★ Retrieval1: The transgender poetry reading event Caroline attended featured posters with messages such as 'trans lives matter' and was filled with pride and strength. Retrieval2: Caroline attended a transgender poetry reading on 2023-10-06 where transgender people shared their stories through poetry in a safe and empowering environment. Retrieval3: Caroline shared a photo of a group of people walking down a street with balloons during the pride parade on 2023-08-11. Retrieval4: Caroline found a rainbow sidewalk in her neighborhood created for Pride Month, which she photographed on 2023-08-25 to symbolize love and acceptance everywhere. Retrieval5: Caroline painted a painting of a tree with a bright sun in the background inspired by a visit to an LGBTQ center, intending to capture unity and strength.
Question "When did Caroline go to the LGBTQ support group?" Reference Answer: 7 May 2023 ★ Retrieval1: Caroline attended an LGBTQ support group on 2023-05-07. ★ Retrieval2: Caroline stated that the LGBTQ support group made her feel accepted and gave her courage to embrace herself as of 2023-05-07. Retrieval3: Caroline joined a new LGBTQ activist group on Tuesday, 2023-07-18, meeting many passionate people about rights and community support. Retrieval4: Caroline volunteered at an LGBTQ+ youth center between 2023-08-25 and 2023-08-28. Retrieval5: Caroline joined the LGBTQ activist group 'Connected LGBTQ Activists' on Tuesday, 2023-07-18. Retrieval6: Caroline attended an LGBTQ conference on 2023-07-10 where Caroline met and connected with people who have gone through similar journeys. ★ Retrieval7: Caroline found the transgender stories at the LGBTQ support group on 2023-05-07 inspiring and felt happy and thankful for all the support.	Question "When did Melanie buy the figurines?" Reference Answer: 21 October 2023 ★ Retrieval1: Melanie bought wooden dolls on 2023-10-21 that remind her of family love. Retrieval2: Melanie's youngest child took her first steps on an unspecified date before 2023-07-20, which Melanie considers a precious milestone. Retrieval3: Melanie's children enjoyed getting their hands dirty and making clay art, including a cup with a dog face, during the pottery workshop on 2023-07-14. Retrieval4: Melanie made a plate with flowers on it in pottery class on 2023-08-24. Retrieval5: Caroline painted a painting of a tree with a bright sun in the background inspired by a visit to an LGBTQ center, intending to capture unity and strength.
Question "What activity did Caroline used to do with her dad?" Reference Answer: Horseback riding ★ Retrieval1: Caroline used to go horseback riding with her dad through fields during her childhood. Retrieval2: Caroline is excited to create a family for kids who need one and acknowledges that being a single parent will be tough but is ready for the challenge as of 2023-05-25. Retrieval3: Caroline's vision for the future is to build her own family by adopting children who have not had a home before, providing them a roof and a safe, loving environment. Retrieval4: Caroline's experience at the LGBTQ+ pride parade on 26 June 2023 motivated her to use her story to help others and reinforced her interest in counseling and mental health. Retrieval5: Caroline plays acoustic guitar, which Caroline started about five years before 2023-08-28, as a way to express emotions.	Question "When is Caroline going to the transgender conference?" Reference Answer: July 2023 ★ Retrieval1: Caroline plans to attend a transgender conference in July 2023 to meet community members and learn about advocacy. Retrieval2: Caroline gave a talk at a school event about her transgender journey and encouraged students to get involved in the LGBTQ community on 2023-06-02. Retrieval3: Caroline intends to work with transgender people to help them accept themselves and support their mental health as of 27 June 2023. Retrieval4: Caroline mentors a transgender teen who is working on building confidence and finding positive strategies. Retrieval5: Caroline attended an LGBTQ conference on 2023-07-10 where Caroline met and connected with people who have gone through similar journeys and felt totally accepted.

Figure 10: **Content of retrieval entries.** TriMem realizes precise retrieval when handling different questions.

D.4 Example of Search Query

In this section, we visualize the example of search query, including the generated target query and the required key information. It can be seen that through the required information analysis, TriMem can break down the problem, enabling a more accurate search.

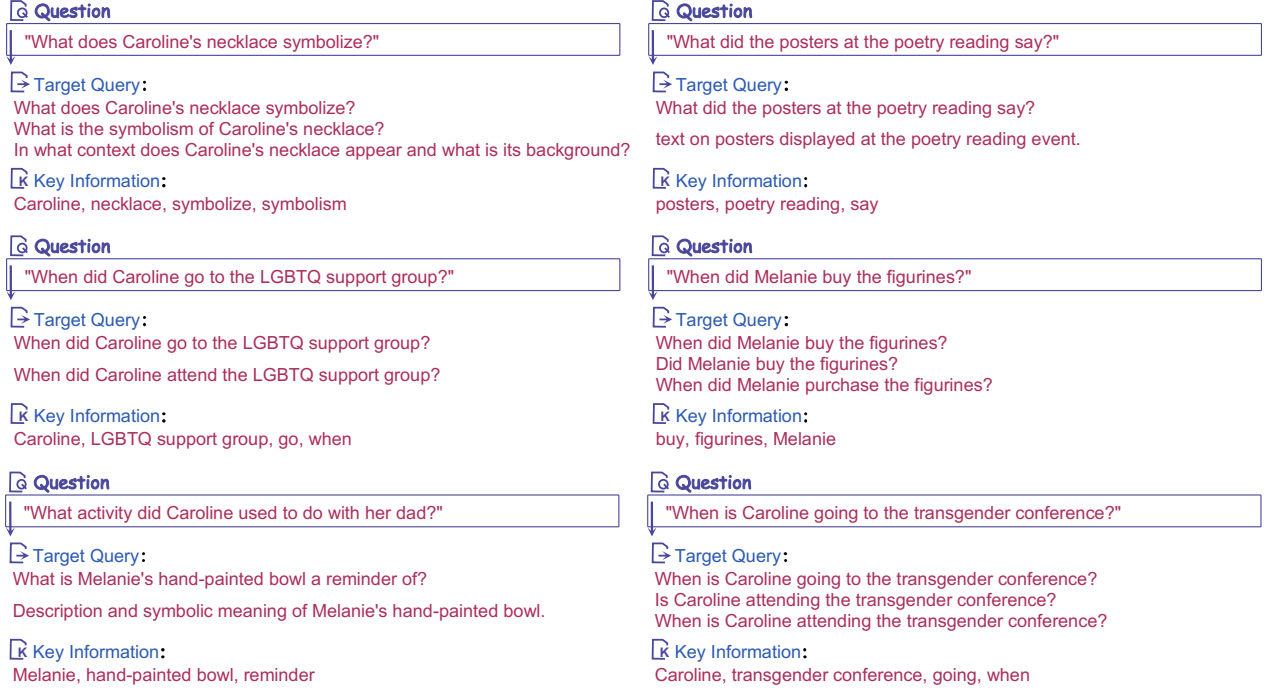


Figure 11: **Example of search query.** Each question is divided into detailed required information during analysis process.

D.5 Performance of Different Window Size

In this section, we visualize the extraction performance with different window size. It can be seen that with a larger window, the extractor either drops low-salience facts entirely or merges several atomic facts into a single bloated entry, even though the extraction prompt explicitly forbids merging. Therefore, it is reasonable for us to set the window size to 40 in the maintext to avoid low quality extraction.

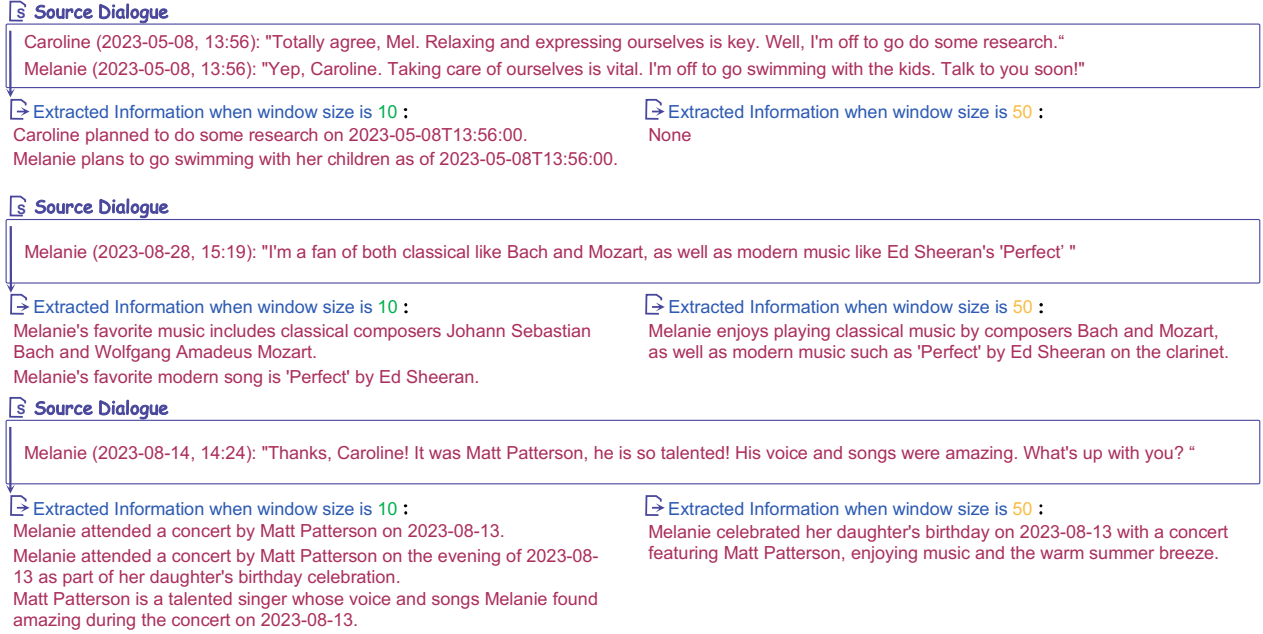


Figure 12: **Performance of different window size.** Larger window size leads to lower extraction quality.

E System Prompts

In this section, we provide the prompts used in our experiment, including prompts used for memory construction, memory retrieval, question reasoning, llm judge and prompt evolution.

E.1 Prompt for Memory Extraction

```
Your task is to extract all valuable FACTUAL information from the following
↳ dialogues and convert them into structured memory entries.
{context}
[Current Window Dialogues]
{dialogue_text}

[Requirements]
1. **Extract Facts, Not Social Gestures**: SKIP greetings, thank-yous,
↳ compliments, and generic praise. Only extract entries that contain novel
↳ factual information (events, activities, plans, preferences,
↳ relationships, specific details like names/titles/numbers).
2. **Source Dialogue IDs**: Each dialogue line starts with an ID in brackets
↳ like [ID:42]. For each memory entry, list the dialogue IDs that the entry
↳ was derived from in the "source_dialogue_ids" field. This is CRITICAL for
↳ tracing back to original context.
3. **Force Disambiguation**: Absolutely PROHIBIT using pronouns (he, she, it,
↳ they, this, that). Always use the person's actual name. Every memory MUST
↳ explicitly state WHO did/said/experienced the thing.
4. **Resolve Temporal References**: Convert ALL relative time expressions to
↳ absolute dates based on the dialogue timestamp:
  - "yesterday" on May 8 -> May 7
  - "last year" in 2023 -> 2022
  - "last week" -> compute the actual date
  - "next month" -> compute the actual month
  The "timestamp" field should be the EVENT time, NOT the conversation
  ↳ time.
5. **Atomic Facts**: Extract individual facts as SEPARATE entries. If one
↳ dialogue mentions 3 activities, create 3 entries. Do not merge unrelated
↳ facts into one summary.
6. **Preserve Specific Details**: Always capture exact names (people, pets,
↳ books, songs), exact numbers (durations, counts, ages), and specific
↳ entities.
7. **Identify Described-But-Unnamed Things Using World Knowledge**: When the
↳ dialogue describes something without naming it, IDENTIFY it by name in
↳ the memory entry. This is CRITICAL | future queries will search by name,
↳ not by description.
  - A study method like "25 minutes on, 5 minutes off" → identify as
    ↳ "Pomodoro technique"
  - A composer whose music is in a named movie → identify the composer (e.g.
    ↳ Harry Potter soundtrack → John Williams)
```

- A game described by its mechanics → identify the game (e.g. "card game
↳ where you find the imposter" → Mafia, "game with colored cards you
↳ match" → UNO)
- A location described by its features → identify it (e.g. "national park
↳ in northern Minnesota with lakes" → Voyageurs National Park)
- A shop/brand described by what it does → identify it (e.g. "they made
↳ all the props for Harry Potter" → MinaLima / House of MinaLima)
- A health condition implied by symptoms → identify it (e.g. frequent
↳ overeating + weight gain → obesity risk)
- A geographic location implied by context → identify the state/country
↳ (e.g. a shelter in a named city → identify the state)

Include BOTH the original description AND the identified name in the
↳ lossless_restatement, and add the identified name to keywords and
↳ entities.

8. **Precise Extraction**:

- keywords: Core keywords (names, places, entities, topic words)
- timestamp: Absolute time of the EVENT in ISO 8601 format (resolved from
↳ relative expressions)
- location: Specific location name (if mentioned)
- persons: All person names mentioned
- entities: Companies, products, organizations, book titles, song names,
↳ etc.
- topic: The topic of this information

[Output Format]

Return a JSON array, each element is a memory entry:

```
```json
[
 {
 "lossless_restatement": "Complete unambiguous restatement (must include
↳ WHO, WHAT, WHEN, WHERE)",
 "keywords": ["keyword1", "keyword2", ...],
 "timestamp": "YYYY-MM-DDTHH:MM:SS or null",
 "location": "location name or null",
 "persons": ["name1", "name2", ...],
 "entities": ["entity1", "entity2", ...],
 "topic": "topic phrase",
 "source_dialogue_ids": [42, 43]
 },
 ...
]
```

#### [Example]

Dialogues:

[ID:1] [2025-11-15T14:30:00] Alice: I just started working at Google! Bob,  
↳ let's meet at Starbucks tomorrow at 2pm.  
[ID:2] [2025-11-15T14:31:00] Bob: Congrats! I've been playing tennis a lot  
↳ lately.

[ID:3] [2025-11-15T14:32:00] Alice: Nice! I've been studying with that  
 ↪ method where you work 25 minutes then take a 5-minute break. It really  
 ↪ helps!  
 [ID:4] [2025-11-15T14:33:00] Bob: I love playing that theme song from the  
 ↪ wizard movie on piano. You know, the one with the boy who goes to magic  
 ↪ school.

Output:

```
```json
[
  {
    "lossless_restatement": "Alice started working at Google as of  

    ↪ 2025-11-15.",
    "keywords": ["Alice", "Google", "employment"],
    "timestamp": "2025-11-15T14:30:00",
    "location": null,
    "persons": ["Alice"],
    "entities": ["Google"],
    "topic": "Alice's new job",
    "source_dialogue_ids": [1]
  },
  {
    "lossless_restatement": "Alice suggested meeting with Bob at Starbucks  

    ↪ on 2025-11-16T14:00:00.",
    "keywords": ["Alice", "Bob", "Starbucks", "meeting"],
    "timestamp": "2025-11-16T14:00:00",
    "location": "Starbucks",
    "persons": ["Alice", "Bob"],
    "entities": [],
    "topic": "Meeting arrangement",
    "source_dialogue_ids": [1]
  },
  {
    "lossless_restatement": "Bob has been playing tennis frequently as of  

    ↪ 2025-11-15.",
    "keywords": ["Bob", "tennis"],
    "timestamp": "2025-11-15T14:31:00",
    "location": null,
    "persons": ["Bob"],
    "entities": [],
    "topic": "Bob's hobby",
    "source_dialogue_ids": [2]
  }
],
```
```

```

{{
 "lossless_restatement": "Alice uses the Pomodoro technique (25 minutes
 ↪ work, 5-minute break) for studying.",
 "keywords": ["Alice", "Pomodoro technique", "studying", "time
 ↪ management"],
 "timestamp": "2025-11-15T14:32:00",
 "location": null,
 "persons": ["Alice"],
 "entities": ["Pomodoro technique"],
 "topic": "Alice's study method",
 "source_dialogue_ids": [3]
}},
{{
 "lossless_restatement": "Bob enjoys playing the Harry Potter theme song
 ↪ (composed by John Williams) on piano.",
 "keywords": ["Bob", "piano", "Harry Potter", "John Williams"],
 "timestamp": "2025-11-15T14:33:00",
 "location": null,
 "persons": ["Bob"],
 "entities": ["Harry Potter", "John Williams"],
 "topic": "Bob's piano playing",
 "source_dialogue_ids": [4]
}}
]

```

Note how "tomorrow" was resolved to 2025-11-16, the greeting was skipped,  
 ↪ described-but-unnamed things were identified (Pomodoro technique, John  
 ↪ Williams), and Alice's job and meeting were extracted as separate atomic  
 ↪ facts.

Now process the above dialogues. Return ONLY the JSON array, no other  
 ↪ explanations.

## E.2 Prompt for Profile Construction

Update the persona profile for {entity\_name} based on new information.

[Current Profile]

{existing\_profile or "No profile yet."}

[New Facts]

{facts}

Rules:

- Update only sections affected by new info
- Preserve existing info not contradicted
- Infer personality traits from behavior patterns
- Synthesize preferences from specific examples
- For [How Others Describe Them]: quote the exact adjectives/phrases other  
↳ speakers use about this person
- For [Beliefs/Spirituality]: note ANY signals | church mentions, faith  
↳ symbols, religious encounters, spiritual language
- Keep each section to 1-3 lines
- Output the complete updated profile

Use this format:

Entity: {entity\_name}

[Identity] Who they are (gender, age, core identity, origin/hometown)

[Personality] Inferred traits from behavior

[How Others Describe Them] Specific words/phrases others use about this  
↳ person (e.g. "thoughtful", "driven")

[Interests] Hobbies, activities, things they enjoy

[Career] Job, education, professional goals

[Values] What they care about, causes, beliefs

[Beliefs/Spirituality] Religious views, faith, spiritual practices (even  
↳ subtle signals like church involvement, faith symbols, or clashes with  
↳ religious groups)

[Relationships] Key people in their life

[Life Events] Major events, milestones, experiences

[Preferences] Specific likes/dislikes, favorites

Only include sections that have information. Output ONLY the profile, no  
↳ other text.

### E.3 Prompt for Target Query Generation

Analyze the following question and determine what specific information is  
 ↪ required to answer it comprehensively.

Question: {query}

Think step by step:

1. What type of question is this? (factual, temporal, relational,  
 ↪ explanatory, etc.)
2. What key entities, events, or concepts need to be identified?
3. What relationships or connections need to be established?
4. What minimal set of information pieces would be sufficient to answer this  
 ↪ question?

Return your analysis in JSON format:

```
```json
{
  "question_type": "type of question",
  "key_entities": ["entity1", "entity2", ...],
  "required_info": [
    {
      "info_type": "what kind of information",
      "description": "specific information needed",
      "priority": "high/medium/low"
    }
  ],
  "relationships": ["relationship1", "relationship2", ...],
  "minimal_queries_needed": 2
}
```
```

Focus on identifying the minimal essential information needed, not  
 ↪ exhaustive details.

Return ONLY the JSON, no other text.



Based on the information requirements analysis, generate the minimal set of  
↪ targeted search queries needed to gather the required information.

Original Question: {original\_query}

Information Requirements Analysis:

- Question Type: {information\_plan.get('question\_type', 'general')}
- Key Entities: {information\_plan.get('key\_entities', [])}
- Required Information: {information\_plan.get('required\_info', [])}
- Relationships: {information\_plan.get('relationships', [])}
- Minimal Queries Needed: {information\_plan.get('minimal\_queries\_needed',  
↪ 1)}

Generate the minimal set of search queries that would efficiently gather all  
↪ the required information. Each query should be focused and specific to  
↪ retrieve distinct types of information.

Guidelines:

1. Always include the original query as one option
2. Generate only the minimal necessary queries (usually 1-3)
3. Each query should target a specific information requirement
4. Avoid redundant or overlapping queries
5. Focus on efficiency - fewer, more targeted queries are better

Return your response in JSON format:

```
```json
{{
  "reasoning": "Brief explanation of the query strategy",
  "queries": [
    "targeted query 1",
    "targeted query 2",
    ...
  ]
}}
```

Return ONLY the JSON, no other text.

E.4 Prompt for Key Information Analysis

Analyze the following query and extract key information:

Query: {query}

Please extract:

1. keywords: List of keywords (names, places, topic words, etc.)
2. persons: Person names mentioned
3. time_expression: Time expression (if any)
4. location: Location (if any)
5. entities: Entities (companies, products, etc.)

Return in JSON format:

```
```json
{{
 "keywords": ["keyword1", "keyword2", ...],
 "persons": ["name1", "name2", ...],
 "time_expression": "time expression or null",
 "location": "location or null",
 "entities": ["entity1", ...]
}}
```

Return ONLY JSON, no other content.

## E.5 Prompt for Question Reasoning

Answer the inference question by reasoning from the provided context and  
 ↳ profiles.

Question: {query}

[Structured Memory Entries]

{context\_str}

{source\_section}{profile\_section}

RULES FOR INFERENCE QUESTIONS:

1. INFER from the evidence | NEVER say "Not mentioned" or "unknown". You MUST  
 ↳ commit to an answer.
2. Use context + profiles to reason about personality, interests, values,  
 ↳ behavior.
3. **\*\*USE WORLD KNOWLEDGE\*\***: When the context describes something without  
 ↳ naming it, IDENTIFY it.
  - A game exclusive to a platform → name the platform (e.g. Xenoblade 2 → Nintendo Switch)
  - A described but unnamed product → identify it (e.g. "card game about exploding cats" → Exploding Kittens)
  - A described technique → name it (e.g. "work 25 minutes then break" → Pomodoro technique)
  - A city mentioned when question asks about country → resolve to country  
 ↳ (e.g. Paris → France, Toronto → Canada)
4. Pay attention to WHO said/did things | speaker tags are authoritative.
5. ALWAYS cite specific facts from profiles/context in your reasoning | never  
 ↳ guess generically.
6. If the question asks what someone ELSE would say about a person, check  
 ↳ [How Others Describe Them] in profiles.
7. If the question asks about religion/spirituality, check  
 ↳ [Beliefs/Spirituality] in profiles.
8. Prefer the MOST SPECIFIC reason from profiles (e.g. "adopting children"  
 ↳ beats "she is settled").

ANSWER FORMAT | BE MAXIMALLY CONCISE:

- The "answer" field must be as SHORT as possible. All reasoning goes in the  
 ↳ "reasoning" field ONLY.
- For yes/no questions ("would", "does", "is", "can", "did", "are", "was"):
  - \* If evidence is DIRECT: answer "Yes" or "No"
  - \* If evidence is INDIRECT/inferred: answer "Likely yes" or "Likely no"
  - \* If the reference answer would naturally include a brief reason (e.g.  
 ↳ "Yes, she is supportive" or "No, he has goals in the U.S."), add a  
 ↳ SHORT reason after a comma. Keep it under 10 words.
  - \* NEVER add long explanations.

- For "A or B" choice questions (e.g. "beach or mountains?", "Charger or Forester?"): Answer with ONLY the chosen option | do NOT answer "Yes" or "No". Pick A or B based on evidence.
- For "what/who/which" questions: Answer with ONLY the name, term, or short phrase. No explanations.
- For trait/attribute questions: List ONLY the adjectives, comma-separated.
  - ↳ Use exact words from [How Others Describe Them] in profiles if available.
- For "what might/what would/what could" questions: Give the shortest answer
  - ↳ that captures the key point. Prefer a few words or a short phrase over a full sentence.
- For identification questions: Just name the thing. "Exploding Kittens",
  - ↳ not "Exploding Kittens, a card game about cats".
- For "which country/state" questions: Answer with ONLY the country or state
  - ↳ name.
- For "how many/how often" questions: Answer with ONLY the number or
  - ↳ frequency.

Examples:

- Q: "Would she enjoy classical music?" → {"reasoning": "Profile [Preferences] says she loves Bach and Mozart", "answer": "Yes"}}
- Q: "Would she be considered an ally?" → {"reasoning": "She attended pride events and supported her friend's transition", "answer": "Yes, she is supportive"}}
- Q: "Would he be open to moving to another country?" → {"reasoning": "He has goals specifically in the U.S.", "answer": "No, he has goals specifically in the U.S."}}
- Q: "Are they fans of the same team?" → {"reasoning": "James is a Liverpool fan and John is a Manchester City fan", "answer": "No, James is a Liverpool fan and John is a Manchester City fan"}}
- Q: "Does he live close to a beach or the mountains?" → {"reasoning": "Context mentions sunset over ocean and beach photos", "answer": "beach"}}
- Q: "Would he prefer a Charger or a Forester?" → {"reasoning": "Profile shows he works on classic muscle cars", "answer": "Dodge Charger"}}
- Q: "What career might he pursue?" → {"reasoning": "Profile [Career] says pursuing counseling and mental health", "answer": "Counseling or social work"}}
- Q: "Would she be considered religious?" → {"reasoning": "Profile [Beliefs] says made art for a church and necklace symbolizes faith, but clashed with religious conservatives", "answer": "Somewhat, but not extremely religious"}}
- Q: "What political leaning?" → {"reasoning": "Profile [Values] shows LGBTQ+ advocacy, progressive values", "answer": "Liberal"}}
- Q: "What card game is she talking about?" → {"reasoning": "Context describes a card game about cats | this is Exploding Kittens", "answer": "Exploding Kittens"}}

```
Q: "What console does he own?" → {"reasoning": "Context says he plays
↳ Xenoblade 2, which is a Nintendo Switch exclusive", "answer": "Nintendo
↳ Switch"}}
Q: "In what country did she buy the snake?" → {"reasoning": "Context says
↳ she bought it in Paris, which is in France", "answer": "France"}}
Q: "What traits would X say Y has?" → {"reasoning": "Profile [How Others
↳ Describe Them] says X called Y thoughtful, authentic, driven", "answer":
↳ "Thoughtful, authentic, driven"}}
Q: "Is it likely she moved?" → {"reasoning": "Some indirect evidence
↳ suggests relocation but not confirmed", "answer": "Likely yes"}}
Return ONLY valid JSON: {"reasoning": "...", "answer": "shortest possible
↳ answer"}}
```

## E.6 Prompt for LLM Judge

You are an expert Relevance & Accuracy Evaluator. Your task is to determine

- ↪ if the Predicted Answer successfully retrieves the necessary information
- ↪ to answer the Question, based on the Reference Answer.

Question: {question}

Reference Answer: {reference}

Predicted Answer: {prediction}

Evaluation Criteria:

1. **\*\*Responsiveness to Query\*\***:

The predicted answer must directly address the specific question asked.

- ↪ It must contain highly relevant information that is topically aligned
- ↪ with the user's intent.

2. **\*\*Core Fact Preservation\*\***:

The prediction must capture the "Key Signal" or "Core Entity" from the

- ↪ reference. The primary subject (Who), event (What), or outcome must
- ↪ be factually grounded in the reference text.

3. **\*\*Informational Utility\*\***:

The answer must provide actionable or meaningful value. Even if brief, it

- ↪ must convey the essential message required by the question context.

4. **\*\*Acceptable Representational Variances (Robustness Protocol)\*\***:

To ensure fair evaluation of semantic meaning over syntactic rigidity,

- ↪ you must accept the following variations as **\*\*Valid Matches\*\***:
- **\*\*Temporal & Numerical Margins\*\***: Accept timestamps within a reasonable
  - ↪ proximity (e.g., +/- 1-2 days due to timezone/reporting differences)
  - ↪ and rounded numerical approximations.
- **\*\*Granularity Independence\*\***: Accept answers at different levels of
  - ↪ abstraction (e.g., "Afternoon" vs. "14:05", "Late October" vs. "Oct
  - ↪ 25th") provided they encompass the truth.
- **\*\*Information Subsetting\*\***: A valid subset of the reference (e.g.,
  - ↪ mentioning 1 out of 3 reasons) is acceptable if it answers the core
  - ↪ of the question.
- **\*\*Synonymy\*\***: Recognize domain-specific synonyms and different formats
  - ↪ as equivalent.

Grading Logic:

- Score 1.0 (Pass): The prediction contains relevant core information,
  - ↪ answers the question with sufficient utility, OR falls within the
  - ↪ acceptable representational variances defined in criterion #4.
- Score 0.0 (Fail): The prediction contains NO relevant information, fails
  - ↪ to identify the core subject/event, or provides no key info that matches
  - ↪ the question's intent.

Output your evaluation in JSON format:

```
{{
 "score": 1.0,
 "reasoning": "Brief assessment focusing on information relevance and core
 ↪ match."
}}
```

Return ONLY the JSON, no other text.



## E.7 Prompt for Prompts Evolution

You are a senior prompt engineer specializing in lifelong memory systems for

- ↪ LLM agents. Perform the "backward pass" of TextGrad: given the JSON dump
- ↪ of one full evaluation run, identify systematic failure patterns and
- ↪ directly produce updated versions of two upstream prompts | the fact
- ↪ extraction prompt and the entity profile construction prompt.

[Current Extraction Prompt]

<PASTE CURRENT Extraction Prompt HERE>

[Current Profile Prompt]

<PASTE CURRENT Profile Prompt HERE>

[Evaluation Result JSON]

Read the file at <RESULT\_JSON\_PATH>. Each entry in `detailed\_results` contains:

```
{
 "question": str,
 "answer": str, // system prediction
 "reference": str, // gold answer
 "category": int, // LoCoMo category id (1: multi-hop,
 // 2: temporal, 3: open-domain, 4:
 // ↪ single-hop)
 "metrics": {
 "f1": float, "rougeL_f": float, "bert_f1": float, "llm_judge_score":
 ↪ float (optional), "llm_reasoning": str (optional)
 }
}
```

Diagnose each failure based on whether the prediction loses a specific

- ↪ detail that should have been preserved (extraction issue) or fails to
- ↪ synthesize an entity-level judgment (profile issue), and locate the
- ↪ responsible prompt accordingly. Skip cases where the signal is unclear.

Focus on systematic patterns rather than one-off failures. Per round, make

- ↪ only a small number of targeted additions; prefer adding new bullets,
- ↪ rules, or examples over rewriting existing content. Preserve the
- ↪ original output schema, field names, and existing examples, and keep the
- ↪ guidance domain-general. If a prompt does not need changes this round,
- ↪ leave it verbatim.

Return a single JSON object with exactly three fields:

```
{
 "rewritten_p_ext": "<full text of the updated P_ext, or verbatim copy of
↪ the input if unchanged>",
 "rewritten_p_prof": "<full text of the updated P_prof, or verbatim copy
↪ of the input if unchanged>",
 "change_summary": "<2-4 sentences explaining: (i) what failure pattern
↪ motivated each addition, (ii) which prompt and section was edited,
↪ (iii) what behavior change is expected. If a prompt was unchanged,
↪ state that explicitly and why no eligible pattern was found.>"
}
```

Return ONLY the JSON, no surrounding prose or code fences.