

M-DaQ: Retrieving Samples with Multilingual Diversity and Quality for Instruction Fine-Tuning Datasets

Zhaochun Guang Zhai¹, Yun Chen¹, Dafan Zeng¹, Huachang Luo¹, Shunmin Han¹, Wenguo Wei¹, Wubin Meng¹, Song Xue¹, Chen Li¹, Hongyu Wang¹, Li Zhang¹, Boxing Chen¹, Daimeng Wei¹

¹ Huawei Technologies Ltd. ² USTC | SIGIR 2026 · Melbourne · July 20–24



1 MOTIVATION

- Multilingual IFT data is scarce, skewed toward English, lacks systematic curation
- Llama-3 IFT dataset: only 3.01% multilingual samples
- No language-agnostic quality scoring for multilingual data
- Data diversity studied only in English settings
- Superficial Alignment Hypothesis (SAH) unverified in multilingual contexts

Three Challenges Addressed:

- No extensible quality scoring for multilingual IFT
 - QSM with triplet loss
- Diversity selection limited to English
 - DAS inspired by MMR
- SAH unverified in multilingual settings
 - 1K → 52K study, 8 langs

2 METHOD: M-DaQ FRAMEWORK

Stage 1: Quality Scoring Model (QSM)

- Fine-tuned on ~2.3K expert-revised samples × 18 languages (from MIDB)
- Triplet loss: instruction → positive (expert-revised) vs negative (original/MT)
- Language-agnostic quality signal from embedding space

Stage 2: Diversity-Aware Selection (DAS)

- MMR-inspired: Quality ≈ Relevance, Diversity ≈ Novelty
- Two-stage pipeline reduces O(n²) → O(n log n)
 - Stage A: Select top-n by QSM score (quality subset)
 - Stage B: Greedily augment from uncovered clusters (diversity subset)
- Ratio n_quality : n_diversity = 6:1 (empirically tuned)


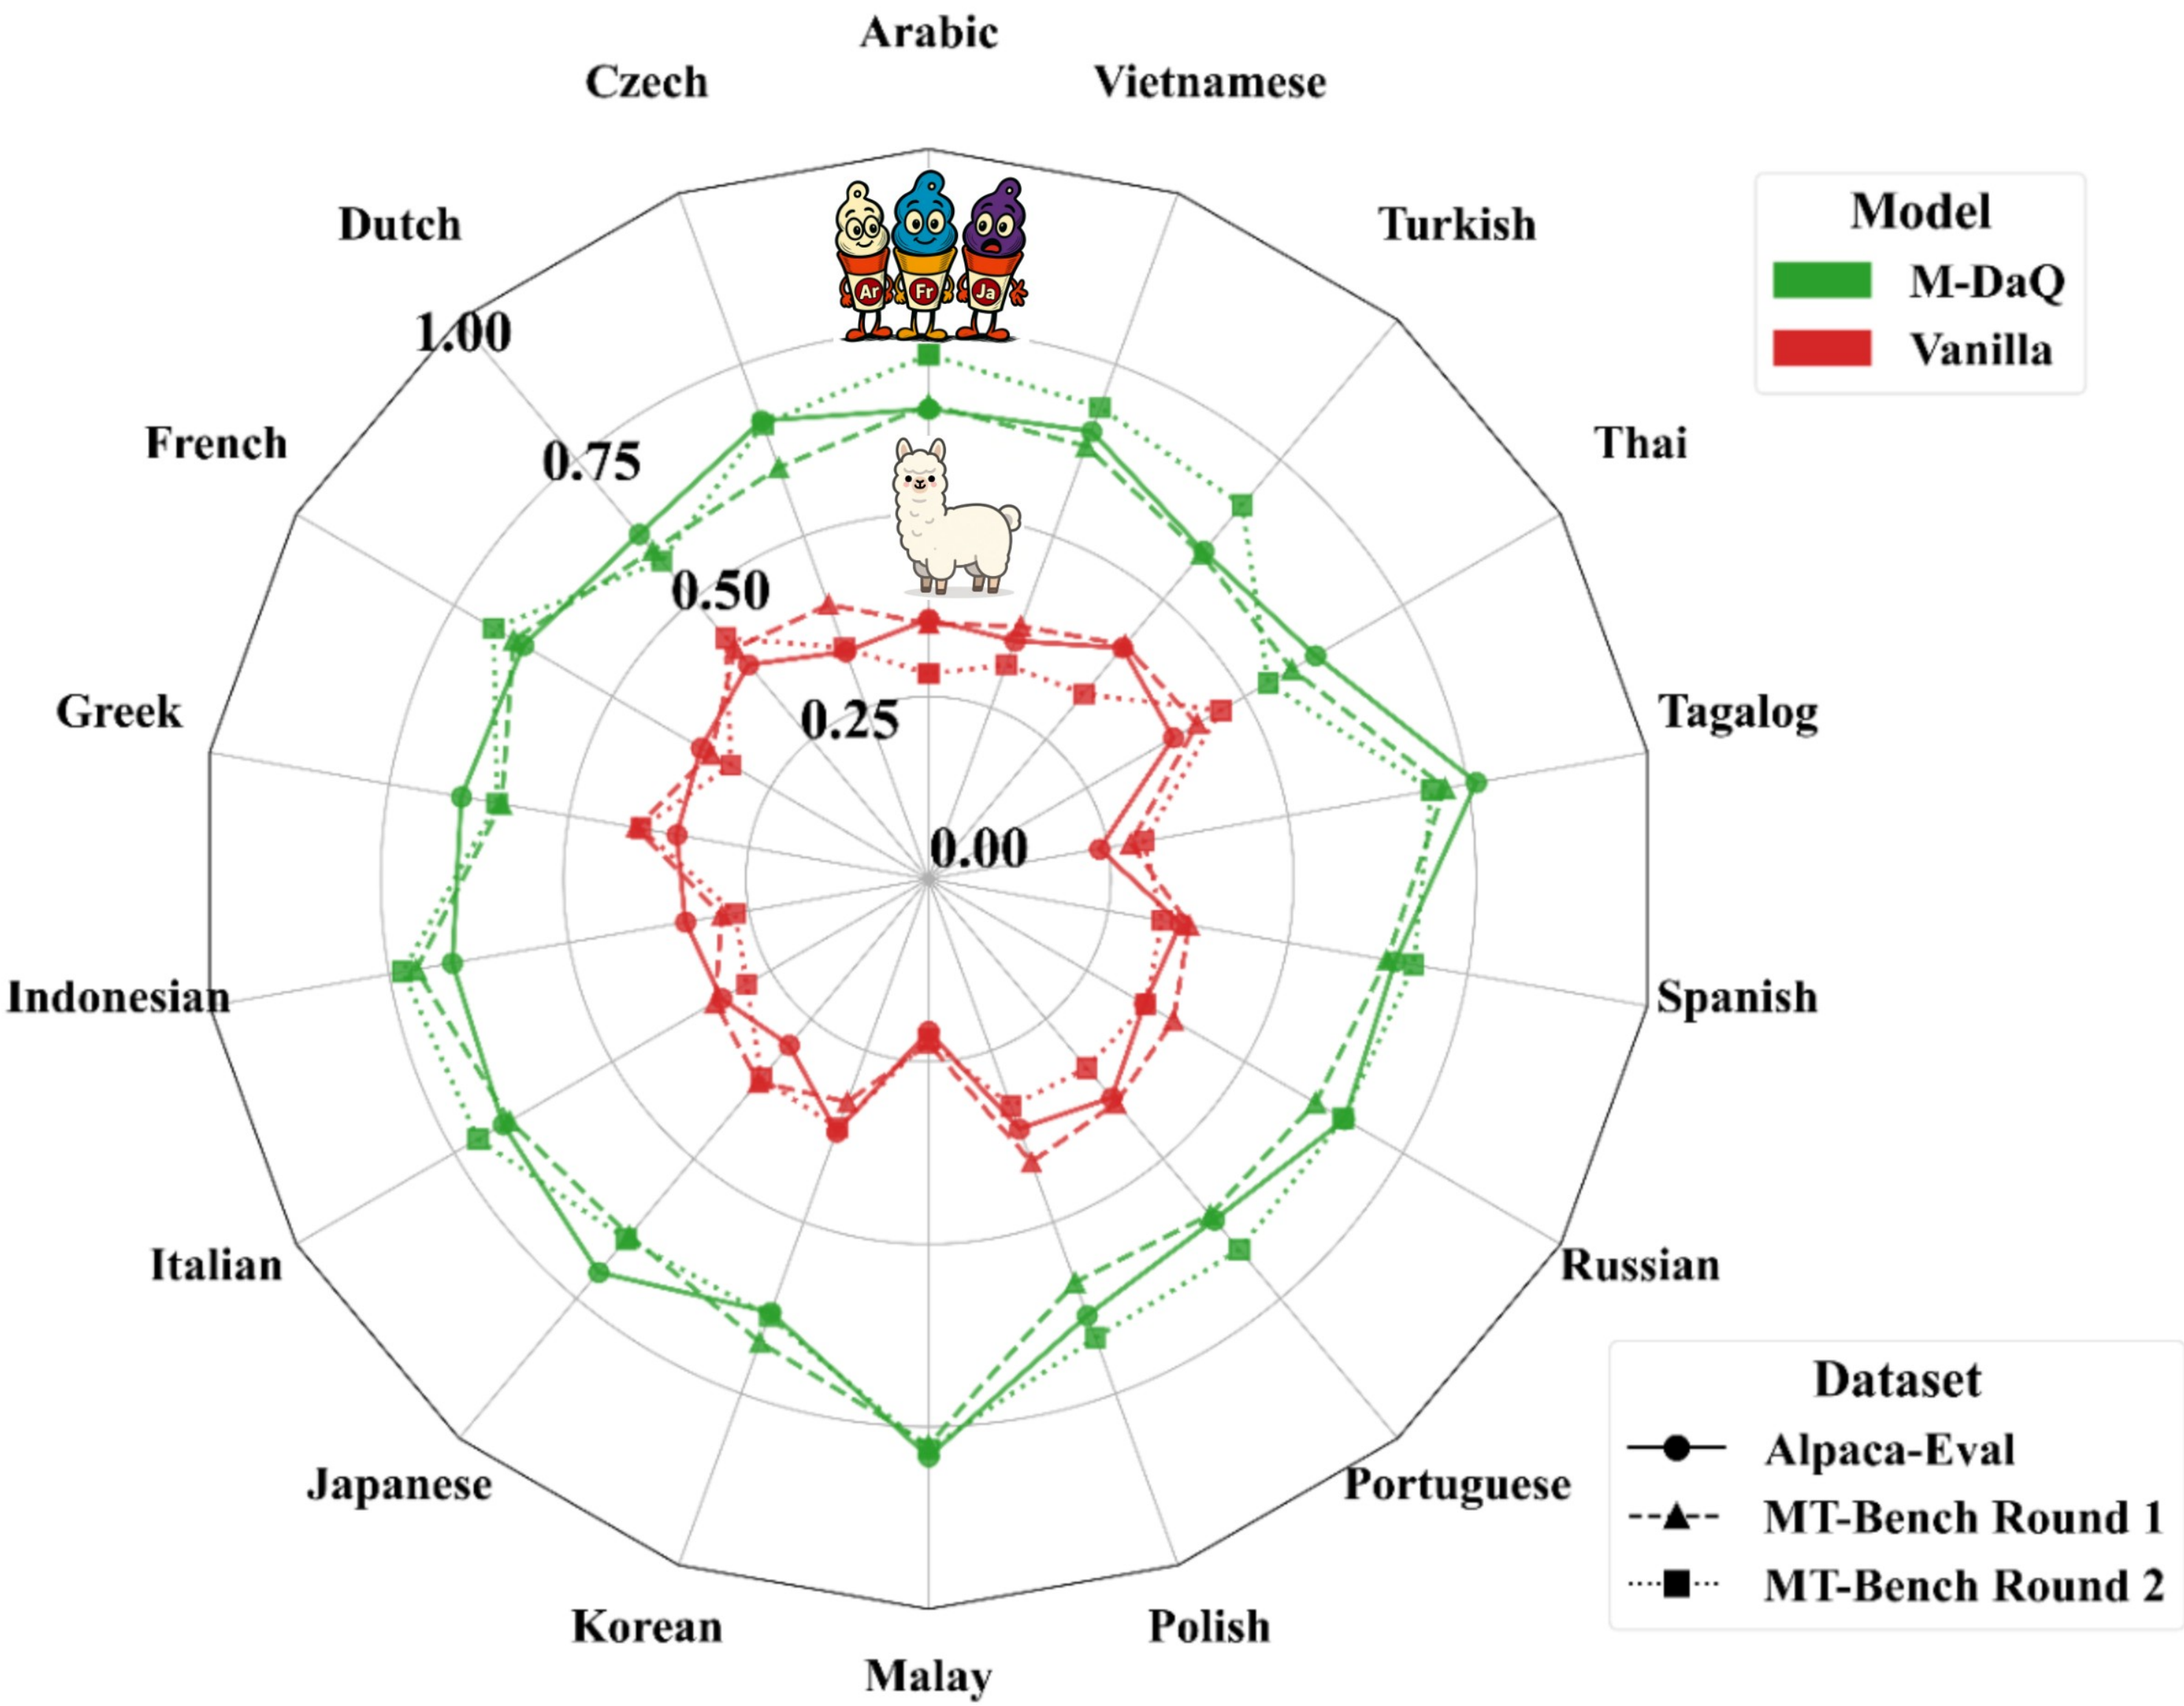


Figure: M-DaQ two-stage pipeline (QSM + DAS)

3 KEY RESULTS

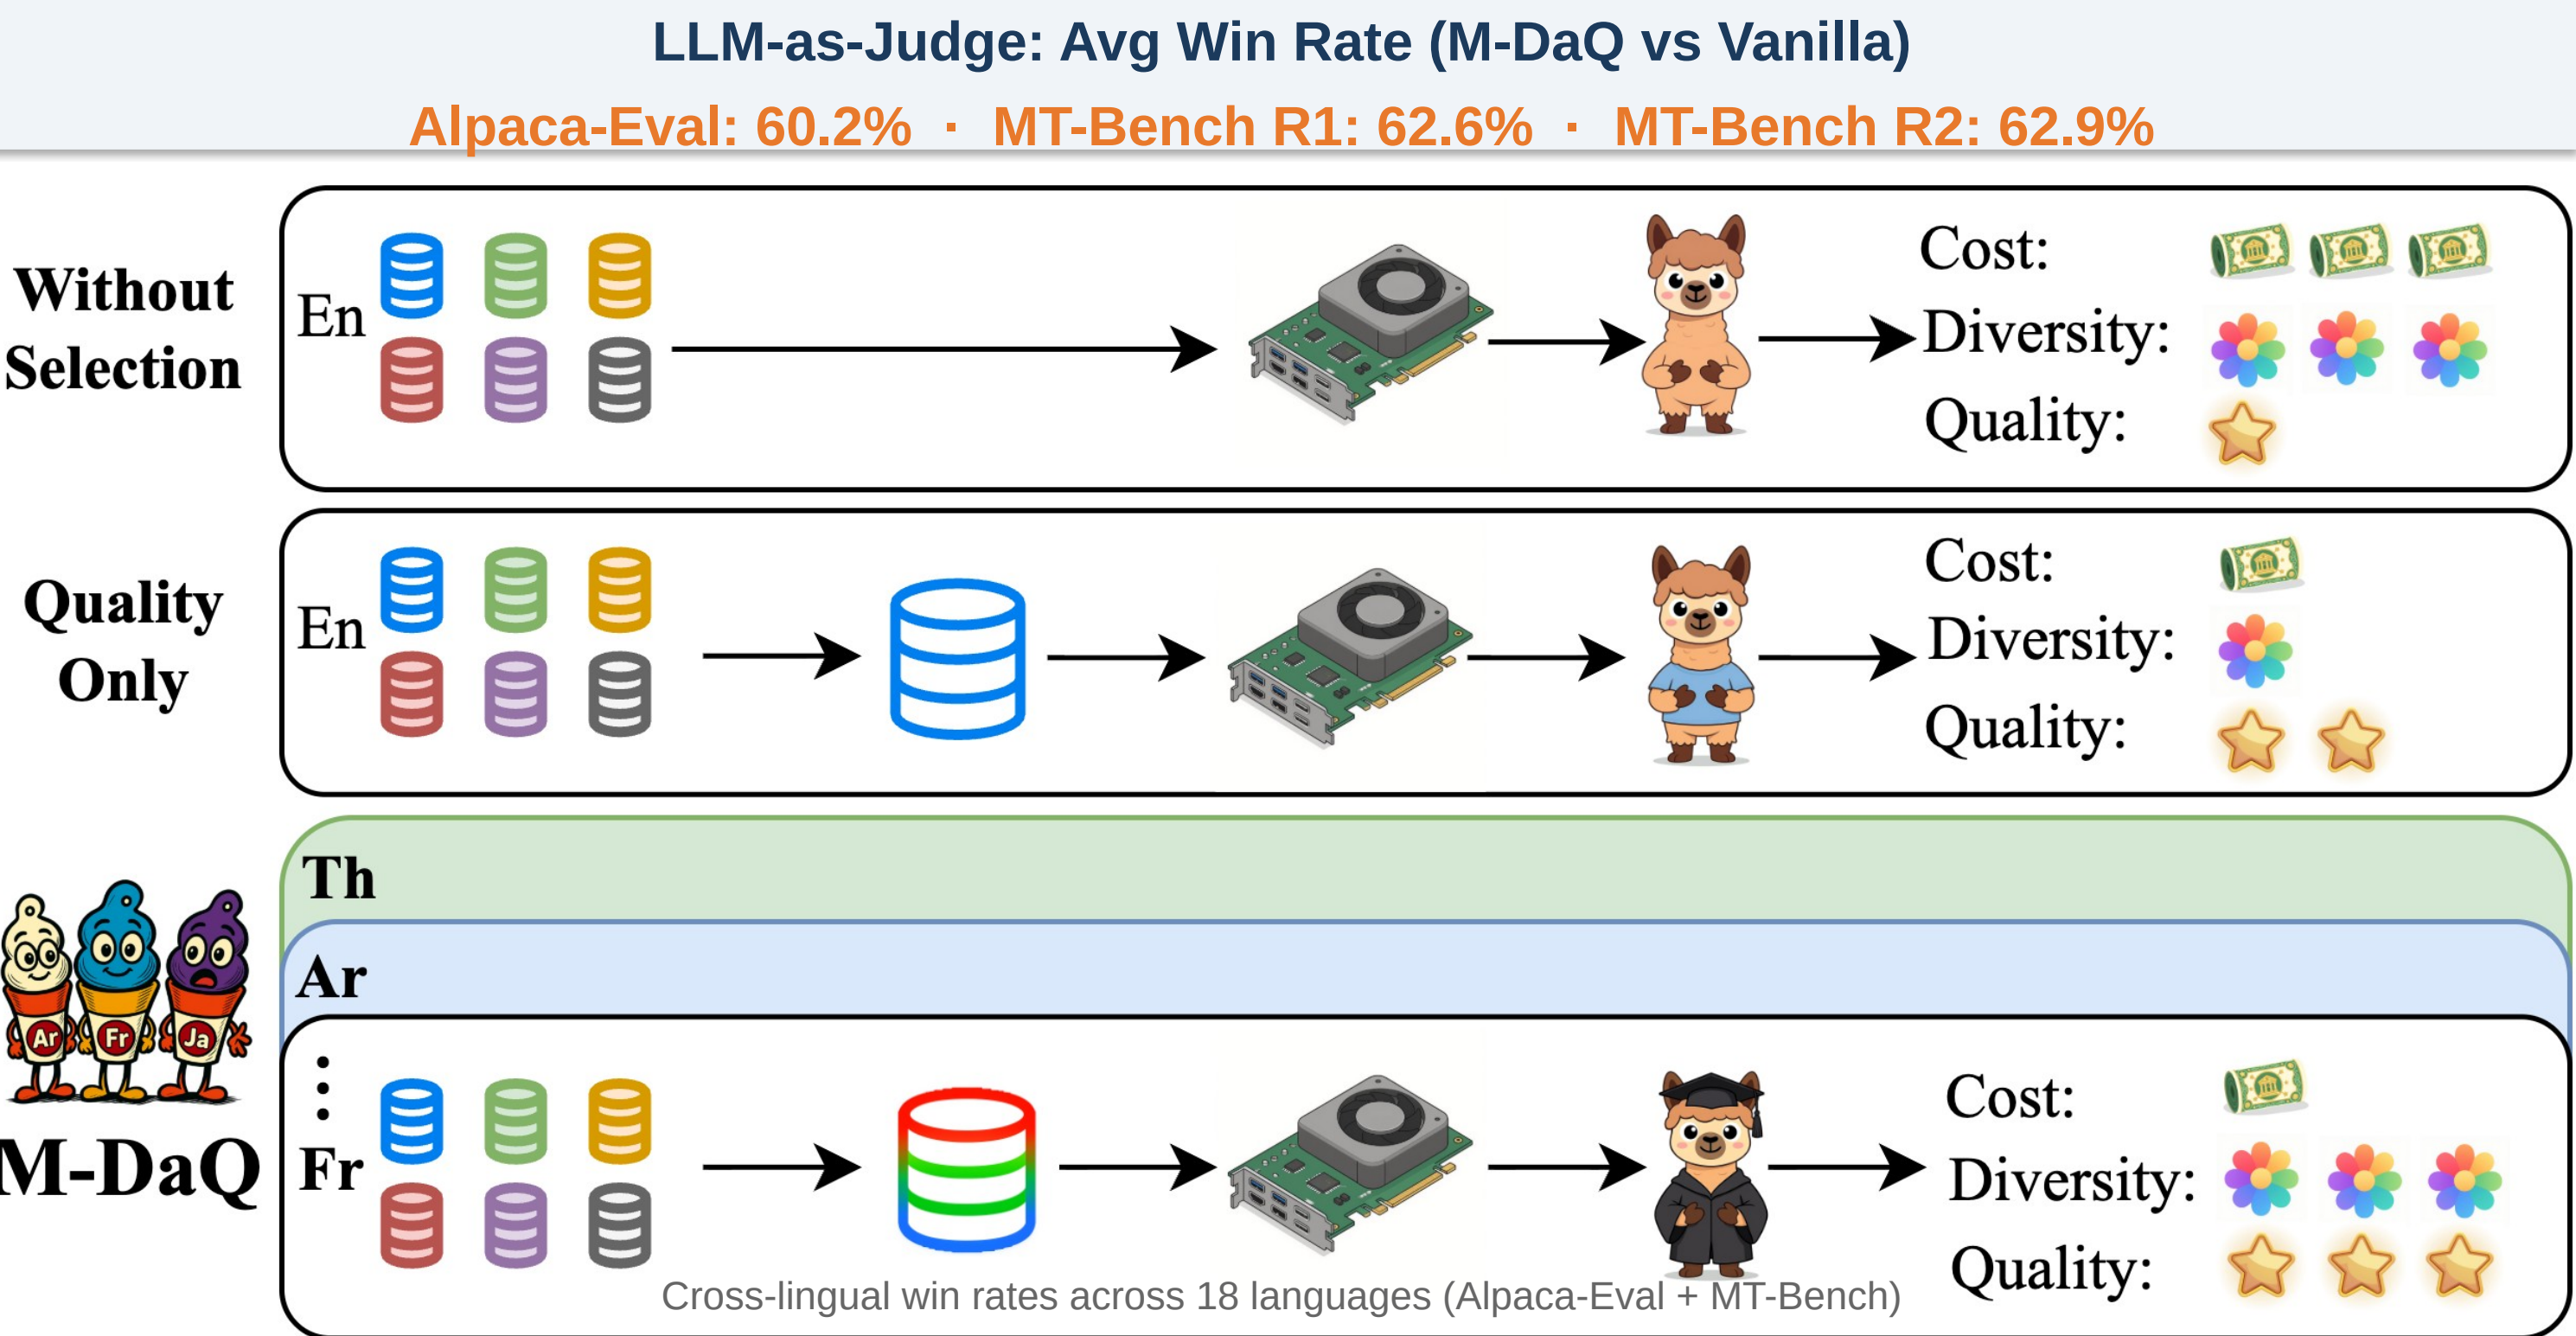


- Consistent improvement across all 18 languages
- Gains MORE pronounced in low-resource languages (Tagalog, Malay)
- M-DaQ mitigates linguistic imbalance and data scarcity

4 HUMAN EVALUATION

6 Languages · 900 Samples · 58 Person-Hours			
Language	Alpaca-Eval	MT-Bench R1	MT-Bench R2
Japanese	86%	84%	80%
Korean	94%	94%	94%
Russian	70%	86%	84%
Portuguese	80%	78%	84%
Greek	58%	76%	82%
French	80%	92%	88%
Average	78.0%	85.0%	85.3%

5 SAH IN MULTILINGUAL SETTINGS

First systematic investigation of SAH across languages.

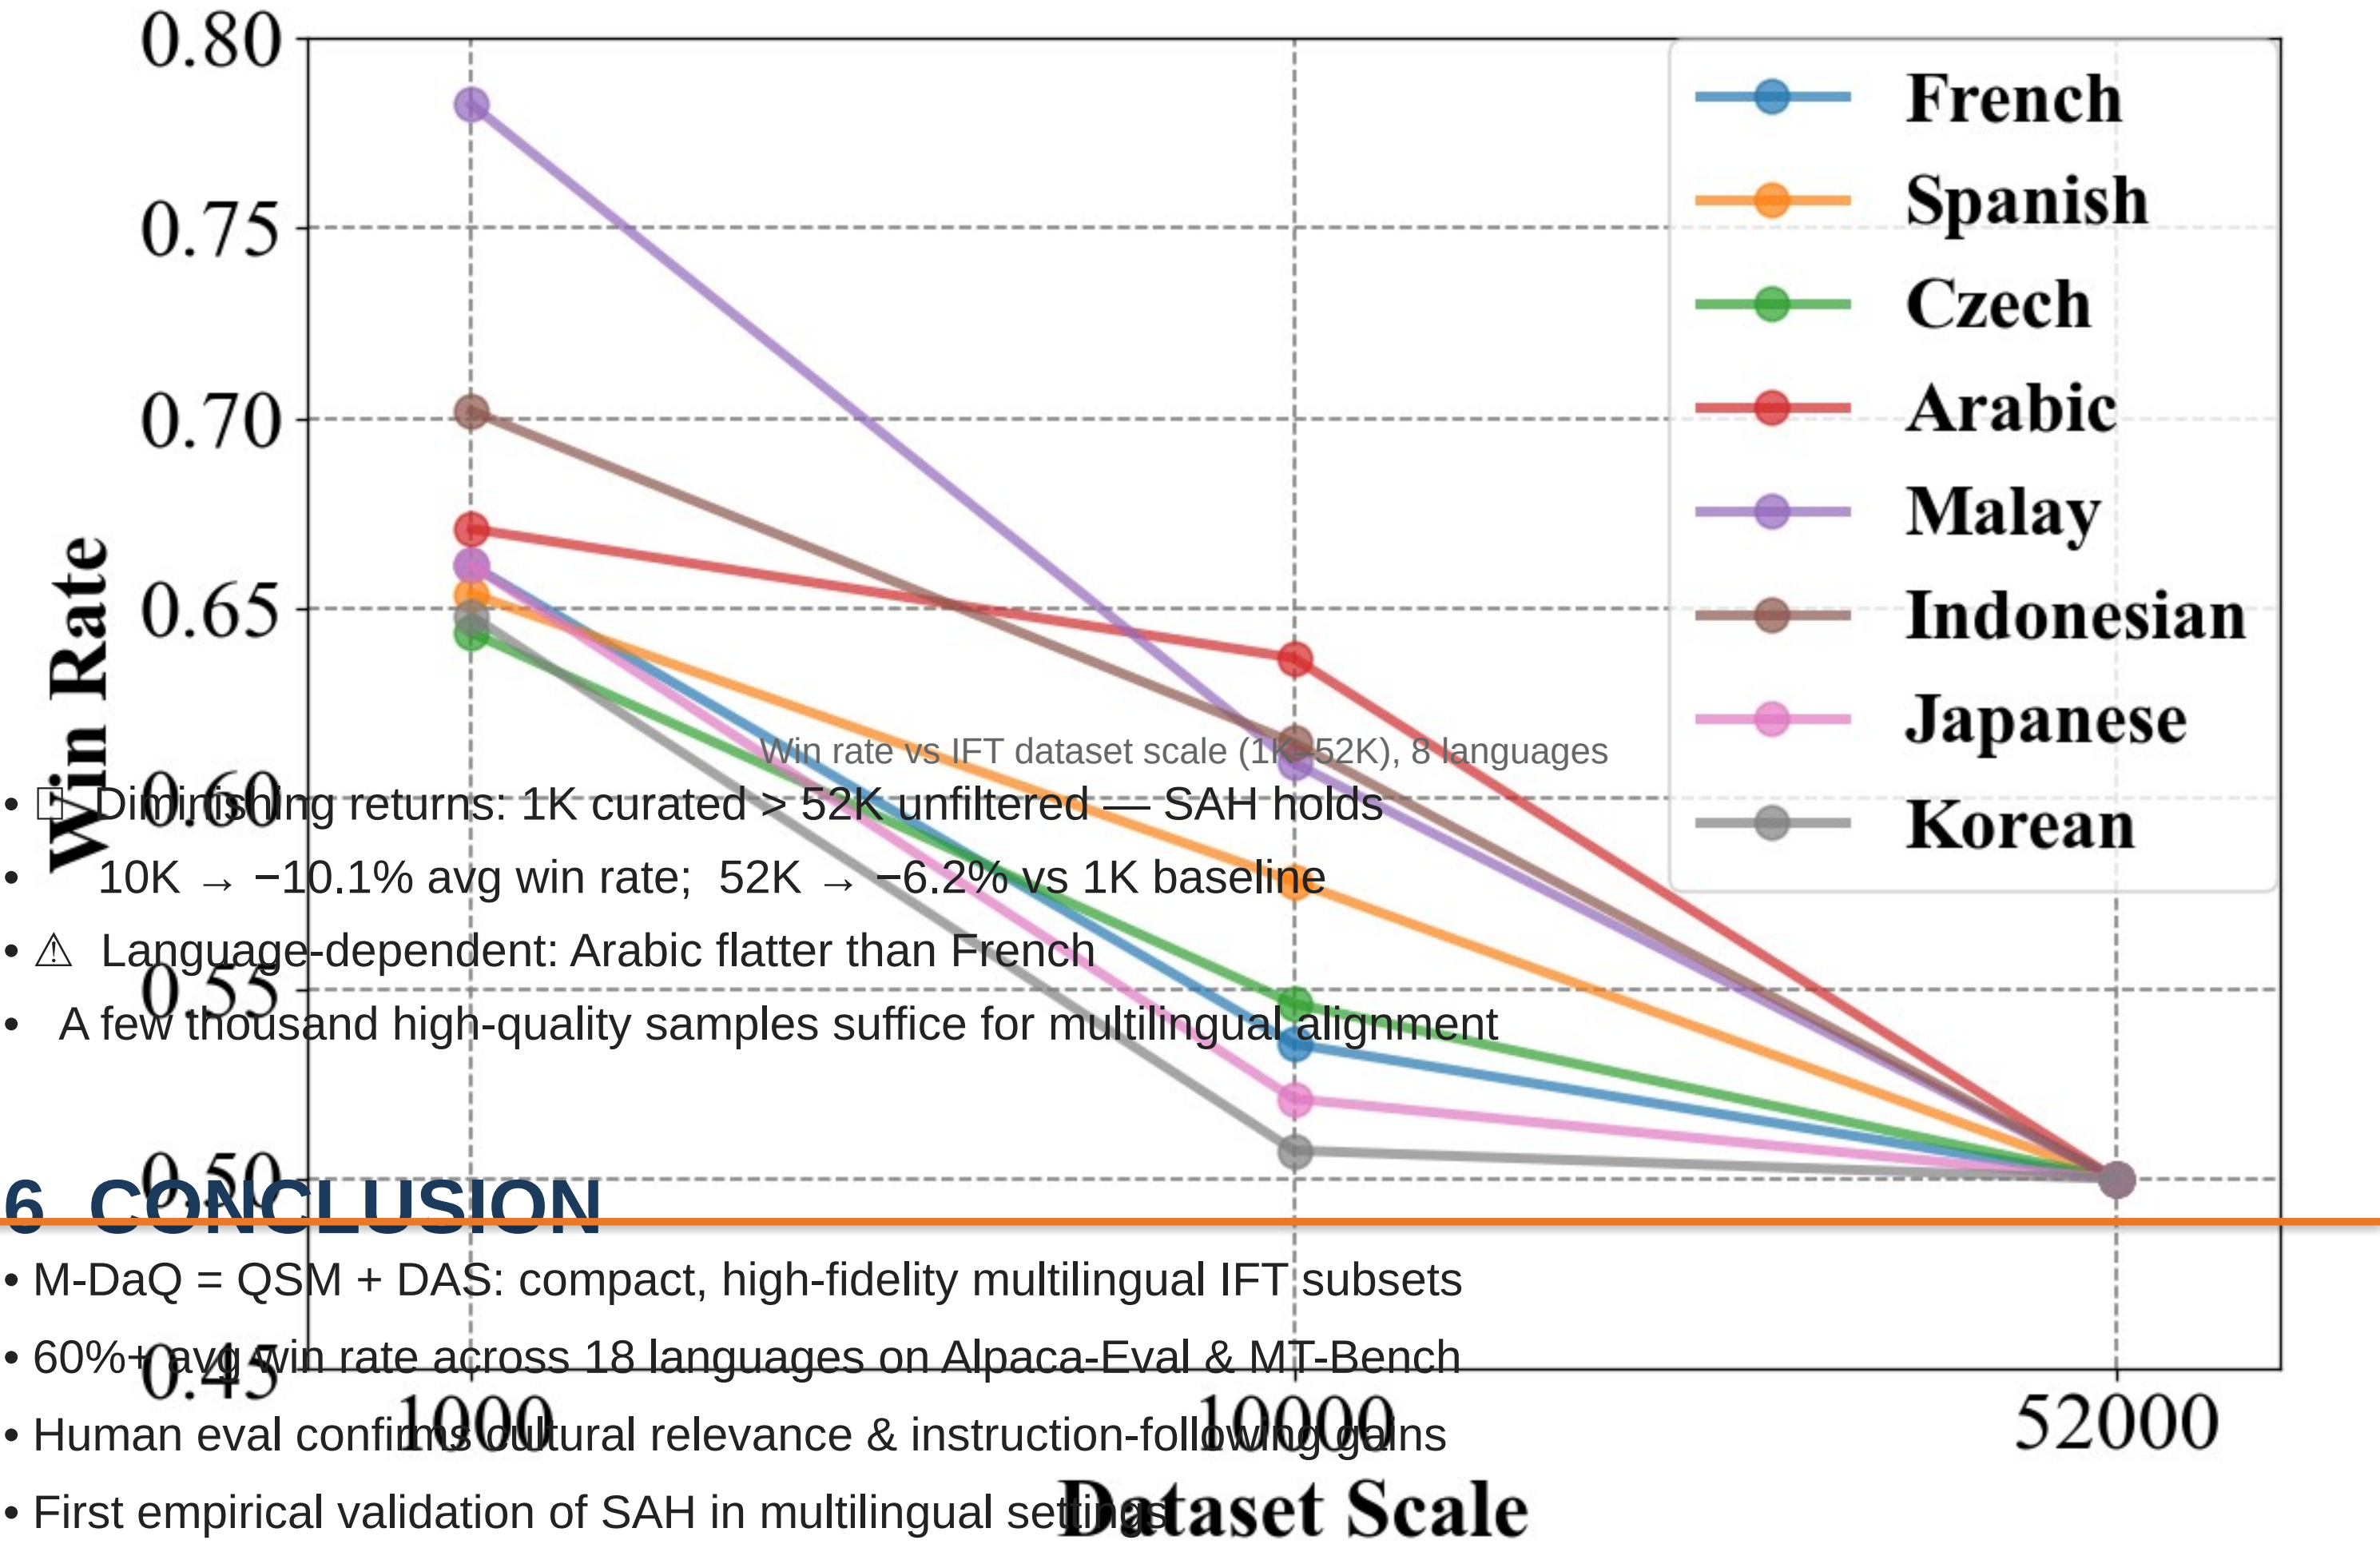

6 CONCLUSION

- M-DaQ = QSM + DAS: compact, high-fidelity multilingual IFT subsets
- 60%+ avg win rate across 18 languages on Alpaca-Eval & MT-Bench
- Human eval confirms cultural relevance & instruction-following gains
- First empirical validation of SAH in multilingual setting
- Code: github.com/zhaocorey/M-DaQ

Code & Resources

github.com/zhaocorey/M-DaQ

Paper

DOI: 10.1145/3805712.3809946 | arXiv: 2509.15549

Contact

zhaochunguang6@huawei.com | +86-15501192353