—

SEAC

10 66,981 BGE-M3 15 6 125 SEAC MRR 0.7937 Hit@5 0.9520 SEAC MRR 0.7290 LlamaIndex 0.1003 p = 0.0625 SEAC 6 0.5673 F1 MRR 0.6853 MRR 0.8289 SEAC

—

I.

RAG [1]

SEAC RAG SEAC

RAG

II.


RAG [1] [2] [4]

RAG [5]-[8] [6]

[9] [10] [11]

[12] SEAC

III. SEAC

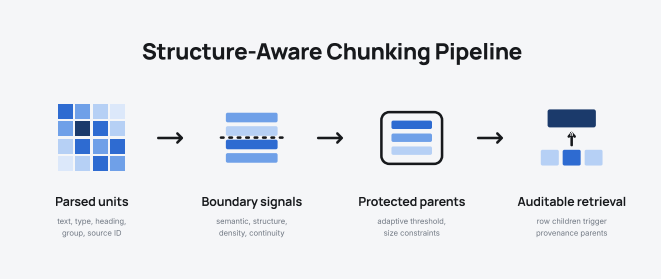

1. SEAC

A.

D = (u_1, ..., u_n)

(h)

(r_j)

t(r_j) = header(h) || row(r_j)

B.

(d_i = 1 - cos(e_i,e_i+1)) (e_i)

(s_i)

rho(u) = sum(v in V) count(v,u) / max(1, tokens(u))

(k_i = min(1,10|rho(u_i)-rho(u_i+1)|))

(p_i)

b_i = 0.45 d_i + 0.30 s_i + 0.25 k_i - p_i

(D) (theta_D = Q_0.8(b) + 0.08r_t - 0.05r_h)

(r_t) (r_h) 512 token 320 token 224 token 48 token

C.

112 token 176 token

(S_p) (S_c) SEAC

S(p,q) = 0.35 S_p(q) + 0.65 max S_c(q)

D.

SEAC RAG

IV.

A.

10 DOCX XLSX API 6 PDF PPTX I P01-P02 P03 P04-P10

I.

				token	
	2	15	21,371	418541	13,557
	1	7	5,193	103562	2,530
	7	67	40,417	1155797	23,747
	10	89	66,981	1677900	39,834

BGE-M3 [3] 512 token LangChain [16] LlamaIndex [17] SEAC SEAC 7 15

B.

BREAK NO_BREAK NOISE P01 4,783 P02-P10 300 Cursor Claude Opus 5 Thinking 100 Cohen's kappa 0.70 [13] P08 kappa 0.650 7,183 77.5% 5.4% 17.1%

P10 11 15 6 125 6 1,368

C.

MRR Hit@k NOISE 10,000 bootstrap 95% [14] SEAC LlamaIndex SentenceSplitter MRR 6 64 Holm [15]

D.

BGE-M3 512 token 64-token

Python

10

V.

A.

II SEAC MRR 0.7937 Hit@5 0.9520 SEAC MRR 0.7290 0.0647 SEAC MRR 0.8561 LlamaIndex MRR 0.1003 bootstrap [0.0042, 0.2008] p = 0.0625 SEAC 6 5 0.05

II.

	MRR	**Hit@5**	**MRR**	**F1**
	0.5158	0.7200	0.1350	0.0000
	0.6086	0.8080	0.7072	0.0369
	0.7290	0.8880	0.8211	0.5032
	0.6999	0.8640	0.8121	0.3843
LangChain	0.6460	0.8480	0.7329	0.0054
LlamaIndex	0.6934	0.8880	0.7586	0.0920
SEAC	0.6796	0.8800	0.7770	0.5673
SEAC	0.7937	0.9520	0.8561	0.5673

SEAC 0.4321 0.8255 F1 0.5673 [0.4708, 0.6488] SEAC F1 0.5032 F1 0.0640 [0.0313, 0.0956] Holm p 0.4375 SEAC

B.

III MRR 0.1084 Hit@5 0.9520 0.8640 Holm p 1.0000 MRR MRR 0.8289 MRR Hit@5 0.9280

III.

	MRR	**Hit@5**	
SEAC	0.7937	0.9520	0.0000
	0.7937	0.9520	0.0000
	0.7959	0.9520	+0.0021
	0.7979	0.9520	+0.0042
	0.7959	0.9520	+0.0022
	0.8129	0.9280	+0.0192
	0.6853	0.8640	-0.1084
	0.8289	0.9520	+0.0352

SEAC 8,746 48,912 5.50 112.11 s 351.12 s 20.93 ms 15.18 ms 5.74 ms “ — — ”

C.

SEAC MRR bootstrap [0.7060, 0.8772] 6 p SEAC 6 5 p = 0.0625 “ ”

SEAC 6 14 Holm p = 0.4375

VI.

SEAC

SEAC

10 6

P08 3

MRR

SEAC

MRR

VII.

SEAC

RAG SEAC MRR 0.7937 Hit@5 0.9520 LlamaIndex

IV-B

Anthropic Claude Opus 5 Thinking OpenAI Codex

[1] P. Lewis, E. Perez, A. Piktus, F. Petroni, V. Karpukhin, N. Goyal, H. Kuttler, M. Lewis, W. Yih, T. Rocktaschel, S. Riedel, and D. Kiela, "Retrieval-augmented generation for knowledge-intensive NLP tasks," in Advances in Neural Information Processing Systems, vol. 33, 2020.

[2] V. Karpukhin, B. Oguz, S. Min, P. Lewis, L. Wu, S. Edunov, D. Chen, and W. Yih, "Dense passage retrieval for open-domain question answering," in Proc. EMNLP, 2020, pp. 6769-6781.

[3] J. Chen, S. Xiao, P. Zhang, K. Luo, D. Lian, and Z. Liu, "M3-Embedding: Multi-linguality, multi-functionality, multi-granularity text embeddings through self-knowledge distillation," in Findings of ACL, 2024, pp. 2318-2335.

[4] T. Chen, H. Wang, S. Chen, W. Yu, K. Ma, X. Zhao, H. Zhang, and D. Yu, "Dense X retrieval: What retrieval granularity should we use?" in Proc. EMNLP, 2024, pp. 15159-15177.

[5] X. Wang et al., "Searching for best practices in retrieval-augmented generation," in Proc. EMNLP, 2024, pp. 17716-17736.

[6] Z. Wang et al., "Document segmentation matters for retrieval-augmented generation," in Findings of ACL, 2025, pp. 8063-8075.

[7] J. Zhao et al., "MoC: Mixtures of text chunking learners for retrieval-augmented generation system," in Proc. ACL, 2025, pp. 5172-5189.

[8] P. Sarthi, S. Abdullah, A. Tuli, S. Khanna, A. Goldie, and C. D. Manning, "RAPTOR: Recursive abstractive processing for tree-organized retrieval," in Proc. ICLR, 2024.

[9] C. Auer et al., "Docling technical report," arXiv:2408.09869, 2024.

[10] J. L. C. Guo, J. Steghofer, A. Vogelsang, and J. Cleland-Huang, "Natural language processing for requirements traceability," arXiv:2405.10845, 2024.

[11] S. J. Ali, V. Naganathan, and D. Bork, "Establishing traceability between natural language requirements and software artifacts by combining RAG and LLMs," in Conceptual Modeling, 2024, pp. 295-314.

[12] N. F. Liu, K. Lin, J. Hewitt, A. Paranjape, M. Bevilacqua, F. Petroni, and P. Liang, "Lost in the middle: How language models use long contexts," Trans. Assoc. Comput. Linguistics, vol. 12, pp. 157-173, 2024.

[13] J. Cohen, "A coefficient of agreement for nominal scales," Educ. Psychol. Meas., vol. 20, no. 1, pp. 37-46, 1960.

[14] B. Efron, "Bootstrap methods: Another look at the jackknife," Ann. Stat., vol. 7, no. 1, pp. 1-26, 1979.

[15] S. Holm, "A simple sequentially rejective multiple test procedure," Scand. J. Stat., vol. 6, no. 2, pp. 65-70, 1979.

[16] LangChain, "RecursiveCharacterTextSplitter, langchain-text-splitters 1.1.2," 2026. [Online]. Available: https://pypi.org/project/langchain-text-splitters/1.1.2/

[17] LlamaIndex, "SentenceSplitter, llama-index-core 0.14.23," 2026. [Online]. Available: https://pypi.org/project/llama-index-core/0.14.23/