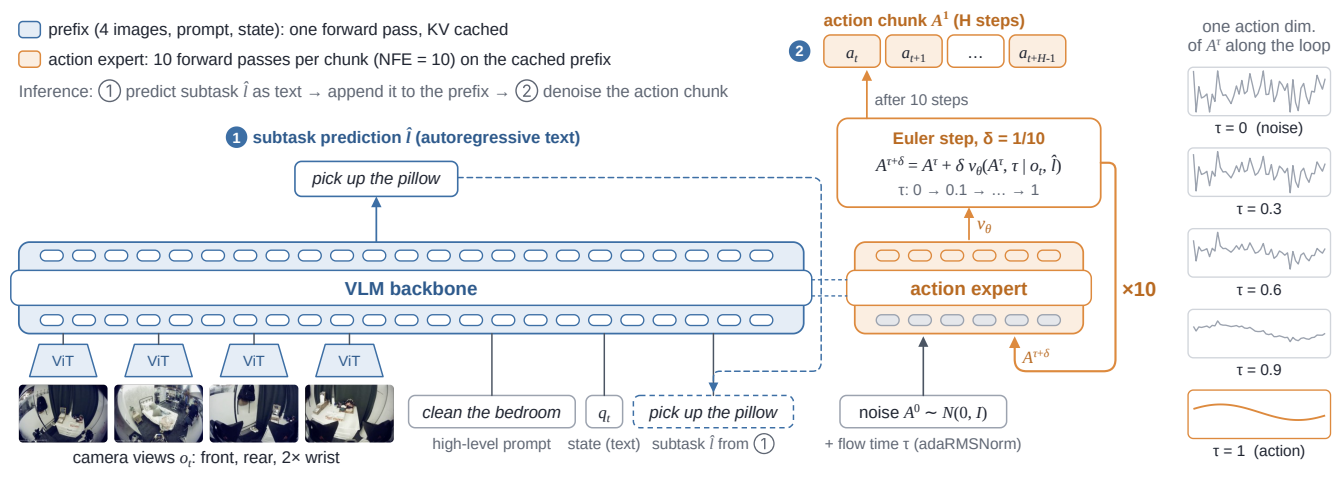

prefix (4 images, prompt, state): one forward pass, KV cached
action expert: 10 forward passes per chunk (NFE = 10) on the cached prefix
Inference: ① predict subtask $\hat{l}$ as text → append it to the prefix → ② denoise the action chunk
1 subtask prediction $\hat{l}$ (autoregressive text)
pick up the pillow
VLM backbone
ViT
ViT
ViT
ViT
camera views o_t: front, rear, 2× wrist
clean the bedroom
high-level prompt
q_t
state (text)
pick up the pillow
subtask $\hat{l}$ from ①
noise $A^0 \sim N(0, I)$
+ flow time τ (adaRMSNorm)
action expert
×10
v_θ
$A^{\tau+\delta}$
Euler step, δ = 1/10
$A^{\tau+\delta} = A^\tau + \delta\, v_\theta(A^\tau, \tau \mid o_t, \hat{l})$
τ: 0 → 0.1 → … → 1
after 10 steps
2
action chunk A^1 (H steps)
a_t
a_{t+1}
…
a_{t+H-1}
one action dim. of A^τ along the loop
τ = 0 (noise)
τ = 0.3
τ = 0.6
τ = 0.9
τ = 1 (action)