

 **ggfields** Public

3 Branches

0 Tags

Q Go to file

t

Go to file

Add file

+

About Code

...

 **pepijn-devries** Merge pull request [#10](#) from pepijn-devries/w...

...

✓

b69aa8b · 3 months ago

.github	Update R-CMD-check.yaml	last year
R	Fix for #8	6 months ago
data-raw	Initial commit	last year
data	Initial commit	last year
gallery	removed accidental scalin...	9 months ago
man	Version bump and URL fix	6 months ago
pkgdown/favicon	Added favicon	3 months ago
tests	attempt to fix failing tests ...	6 months ago
vignettes	Initial commit	last year
.Rbuildignore	Added script to generate ...	9 months ago
.gitignore	Added favicon	3 months ago
DESCRIPTION	Added favicon	3 months ago
LICENSE.md	Initial commit	last year
NAMESPACE	Initial commit	last year
NEWS.md	Version bump and URL fix	6 months ago
README.Rmd	Version bump and URL fix	6 months ago
README.md	Version bump and URL fix	6 months ago
_pkgdown.yml	Added CRAN comments file	last year
cran-comments.md	Fix for CRAN checks	last year
ggfields.Rproj	Initial commit	last year

Add vector fields layers to ggplots

[pepijn-devries.github.io/ggfields/](#)
[#ggplot2](#) [#visualisation](#) [#spatial](#)

- Readme
- GPL-3.0 license
- Activity
- 4 stars
- 1 watching
- 0 forks
- Report repository

Releases

No releases published


Packages

No packages published

Deployments 11

✓ **github-pages** 3 months ago
[+ 10 deployments](#)

Languages




Overview

R-CMD-check passing downloads 154/month CRAN 0.0.7 CRAN OK r-universe 0.0.7 codecov 95%

Add vector field layers to your `ggplot2::ggplot()`. Although it has similarities with `ggplot2::geom_spoke()`, `ggfields` offers some distinct features:

- The `radius` aesthetic is mapped to a scale and therefore can be added to the guides (see `vignette("radius_aes")`).
- Not only `data.frame`s are supported, but also geometric data (`sf::st_sf()` and `stars::st_as_stars()`).
- Corrects angles for displayed aspect ratio or coordinate system (see `vignette("angle_correction")`).

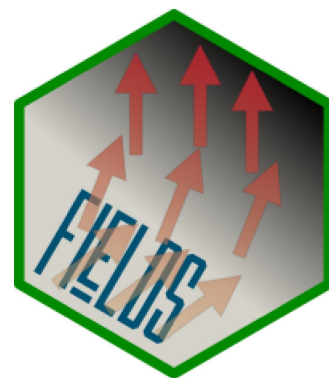

Installation

Get CRAN version

```
install.packages("ggfields")
```



Get development version from r-universe

```
install.packages("ggfields", repos = c("https://pepijn-devries.r-universe.dev", "https://cloud.r-project.org"))
```



Adding vector fields to a map

The example below shows how seawater current data can be added to a map:


```
library(ggplot2)
library(ggfields)
library(ggspatial) ## For annotating with Open Street Map
```



```
data(seawatervelocity)

ggplot() +
  ggspatial::annotation_map_tile(
    alpha = 0.25,
    cachedir = tempdir()) +
  geom_fields(
    data = seawatervelocity,
    aes(radius = as.numeric(v),
        angle = as.numeric(angle),
        colour = as.numeric(v)),
    max_radius = grid::unit(0.7, "cm")) +
  labs(colour = "v[m/s]",
        radius = "v[m/s]") +
  scale_radius_binned() +
  scale_colour_viridis_b(guide = guide_bins())
```



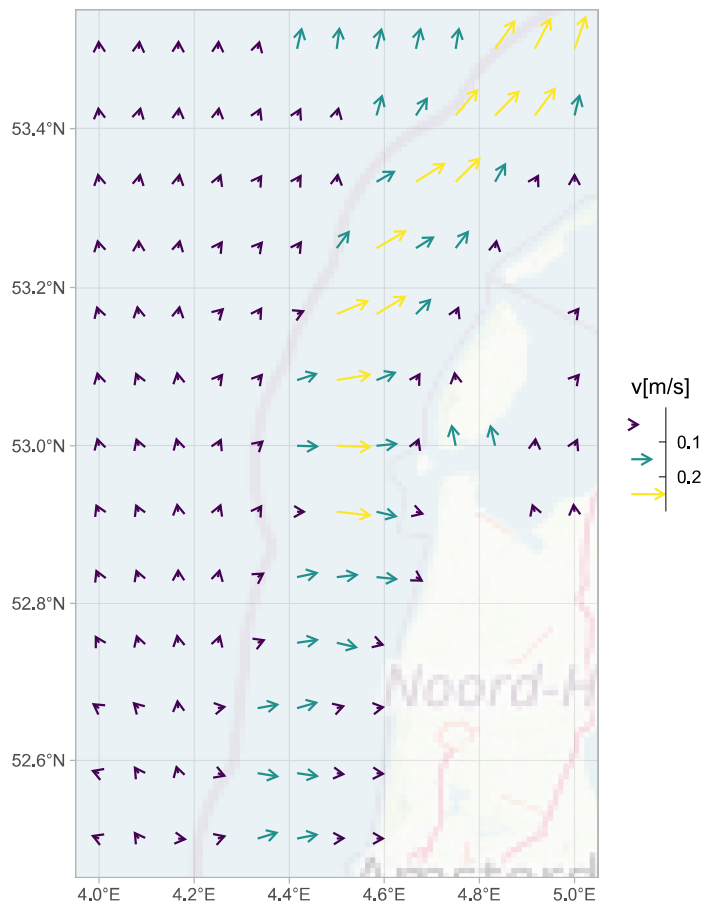

Simple data.frames

Vector arrows can also be added to simple plots with `x` and `y` data:

```
## First generate some arbitrary data to plot:
n <- 10
df <- data.frame(x = seq(0, 100, length.out = n), y = rnorm(n),
                 ang = seq(0, 2*pi, length.out = n))
df$len <- 2 + df$y + rnorm(n)/4

ggplot(df, aes(x = x, y = y)) +
  geom_line() +
  geom_fields(aes(angle = ang, radius = len), .angle_correction = NULL)
```

