

Exploiting Publication Contents and Collaboration Networks for Collaborator Recommendation

Huizhen Jiang^a, Zhen Chen^a, Haifeng Liu^a

^a*Dalian University of Technology, Dalian, China*

Abstract

In academia, researchers with the same or similar research direction usually collaborate to discuss scheme, design experiments, write papers, etc. Recently, due to the proliferation of online social networks, it has become conventional for researchers to communicate and collaborate with each other. However, another problem arises. That is, how to find the most relevant and potential collaborators (MPCs) for each researcher. In this work, we propose a novel recommendation model called CCRec, which combines the information on researchers' publications and collaboraiton network to generate better collaborator recommendation. In order to effectively identify the most potential collaborators for researchers, we adopt a topic clustering model to identify the academic domains, as well as a random walk model to compute researchers' feature vectors. Using DBLP data sets, we conduct benchmarking experiments to examine the performance of CCRec. The experimental results show that CCRec outperforms other state-of-the-art methods in precision, recall and $F1$ score.

Keywords: Collaboration recommendation, publication contents, collaboration networks, topic clustering, random walk model.

1. Introduction

The current scale of the Internet has risen beyond the imagination of people due to its rapid development. Consequently, how to obtain useful and effective information has become a complex task as a result of information overload.

5 Recommender systems and techniques reduce the problems and immensely help people by providing easier access to the relevant resources they really need.

In academia, collaboration among researchers often occurs and it has been shown that research collaboration has impact on scientific productivity [1]. Therefore, collaboration recommendation becomes very necessary and has been
10 attracting more and more researchers in recent years. Generally, collaboration recommendation can be grouped into two classes: 1) recommend the most potential collaborators (MPCs) who have never collaborated with target before (i.e., build new collaborations); 2) recommend the most valuable collaborators (MVCs) who have collaborated with target before (i.e. reinforce old collabora-
15 tions).

Considering the inherent requirements, a variety of methods relating to collaborators recommendation have been proposed, which involve three main aspects: content-based, social network-based and hybrid recommendation. Some traditional content-based methods extract researchers academic features through
20 tags of interest, user profiles, publications etc. They make collaborators recommendation based on computing interest similarities [2, 3, 4]. However, a researcher shows biasness in various academic domains. Such behaviors usually reveal academic features of researchers in different domains. Thus, it is imperative to consider academic domains when recommending collaborators. Our
25 previous work proposed a social network-based model called ACRec [5], which solved the problem of recommending MVCs. ACRec enables the collaborated researchers to collaborate with each other again. However, many scientists also initiate collaborations outside of their social networks. It is burdensome and fraught with risk of initiating collaboration with socially unconnected re-
30 searchers. However, unconnected researchers (MPCs) are more significant to be recommended. What’s more, some hybrid models have been introduced in recent years [6, 7, 8], which have paved the way for many good references.

In this paper, we propose a novel hybrid model by exploiting Publication Contents and Collaboration Networks for Collaborators Recommendation (C-
35 CRec). Utilizing a topic clustering model [9] [10] and a random walk model,

CCRec integrates the features of publications’ contents and collaboration networks. We extract the subject terms from all researchers’ publications and cluster these terms into several topics, then distribute researchers to corresponding domains. To represent the feature vectors of each researcher, we run the random walk with restart model (RWR) on each domain, which has been proved to be competent for calculating the rank score of nodes in social networks. After that, the CCRec firstly compute the similarities of researchers’ feature vectors and then make a TopN recommendation of MPCs.

In summary, we make the following contributions in this paper. 1) To compute the most potential collaborators recommendation, we develop a model CCRec, which combines the content-based and social network-based methods. By adopting this procedure, our approach is more favourable in terms of achieving remarkable personalized collaborators recommendation. 2) To reveal researchers’ academic features in different domains, we present the feature vectors by utilizing a topic clustering model and a random walk model. 3) Finally, we conduct extensive experiments on a subset of DBLP data set to evaluate the performance of CCRec in various scenarios. Moreover, we measured our previous ACRec model and the normal common neighbors-based model (CNRec) for comparison. Promising results are presented and analyzed.

The remainder of the paper is structured as follows. Section 2 briefly presents the related work. We discuss the details of our recommendation model in section 3, which highlights the structure of our recommendation model. In section 4, we conduct a series of experiments and analyze the results. Finally, section 5 concludes the paper.

2. RELATED WORK

Collaboration plays an important role in academic research. A large aspect of work relating to academia focuses on two key issues, reinforcing and discovering collaborators, which are respectively defined as MVCs recommendation and MPCs recommendation in this paper. Lopes et al. [2] worked on identifying new

65 partners to execute joint research and enhancing the collaboration of current
partners for researchers. Chen et al. [11] proposed that the purpose of friends
recommendation is "Make new friends, but keep the old". Research on enterprise
social networking [12] shows that users in a corporate context are interested in
discovering valuable contacts not yet known to them, or connecting to weak
70 ties, in addition to staying in touch with their close colleagues. Our previous
work [5] focuses on recommending MVCs for researchers and enhancing the
collaboration with colleagues in their academic social networks. In this work,
CCRec has an aptitude for discovering new collaborators with high similarity
(i.e. MPCs recommendation).

75 In general, collaborators recommender systems are studied in three differ-
ent perspectives according to methodologies used to perform recommendation:
content-based, *social network-based* and *hybrid approach*. The related work pre-
sented below correlate with these types of models.

Content-based methods recommend items classified according to user pro-
80 files and early choices considering semantic issues. Das G. et al. [3] proposed
models for computing the similarity between researchers based on expertise
profiles extracted from their publications and academic homepages. Lopes et
al. [2] considered researchers' publications area and the vector space model to
make collaboration recommendation. Kim et al. [4] proposed a collaborative
85 filtering method to provide an enhanced recommendation quality derived from
user-created tags. However, researchers often behave differently across multi-
ple domains of interests, which might introduce topic drift problems in general
recommendation systems [13].

Social network-based methods recommend items considering the structure
90 of social networks or some social factors. Ma et al. [14] analyzed how social
network information can benefit recommender systems and proposed a method
of improving the performance of recommender systems by incorporating social
network information. T. Huynh et al. [15] proposed a method based on a
combination of probability theory and graph theory for modeling and analysing
95 co-author networks. They explored similar vertices of potential candidates for

collaboration recommendation. Their main contribution involves taking the trend information into considering when computing the similarity of vertices. Many other approaches have been presented to formalize academic collaboration recommendation as a link prediction problem [16] [17] in social networks. Some
100 of these approaches have been applied to large social networks and results show good performance. Lichtenwalter et al. [18] examined some important factors for link prediction and proposed a general framework, in addition to our previous work [5].

Hybrid methods combine content-based and social network-based method
105 to integrate their benefits. Lee et al. [6] exploited how well content-based, social network-based and hybrid recommendation algorithms predict coauthor relationship, and results show that a hybrid algorithm combining content and social networks information performs better. Chen et al. [7] discussed CollabSeer, an open system to recommend potential research collaborators for researchers
110 and scientists, which discovers collaborators based on the structure of coauthor networks and the user’s topic of research interests. Cohen et al. [8] also worked on solving the collaborators recommendation problem, by combining traditional techniques for structural link prediction in social networks with textual relevancy and global importance metrics.

115 In summary, hybrid methods have evident superiorities in representing researchers features and making collaborators recommendation. Moreover, the topic drift problems should be well solved when recommend collaborators. In this paper, We proposed CCRec model, which combined content-based and social network-based method, to discovery the MPCs in academic social networks.

120 3. DESIGN OF CCRec

Our proposed recommendation scheme for CCRec is inspired by the reality and truth that a researcher usually desires to know other researchers who have similar research interests and strong influence in academia. As mentioned above, researchers often behave differently across multiple domains of interests.

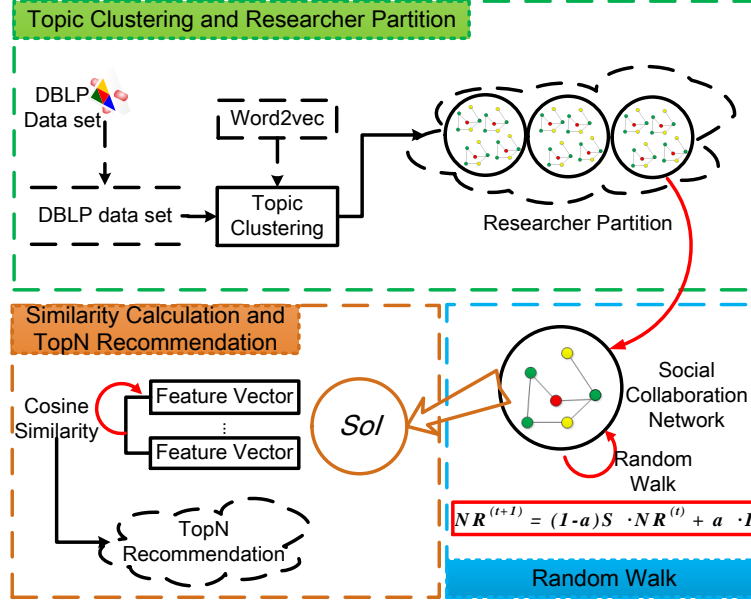


Figure 1: The architecture of CCRec

Such behaviors usually reveal the academic features of researchers in different domains. Besides, as a social-based model, the RWR model has been proved to be competent for calculating the rank score of nodes in social networks derived from co-authorship [5]. Researchers' strength of influence in specific domains can be well reflected by RWR. In this work, we first adopt a content-based method to acquire multiple domains of interests. Secondly, we employ the social network-based method of RWR to measure the researchers' strength of influence in different domains. In the final step of our design, we use the feature vector to evaluate the similarity of researchers and then obtain the recommendation list. The detailed process is described below and the corresponding pseudo-code is illustrated in Algorithm 1. Fig. 1 depicts the three main components of CCRec.

Algorithm 1 CCRec(D)

```
1:  $SoI \leftarrow Init()$ 
2: for  $d$  in  $D$  do // Traverse domains set  $D$ .
3:    $\mathbf{S} \leftarrow ComputeTransferMatrix(d)$ 
4:    $SoI_{d,0}, R, Q \leftarrow InitVec()$ 
5:   for  $k \leftarrow 0$  to  $MaxIteration - 1$  do
6:      $diff \leftarrow 0$ 
7:     for  $i \leftarrow 0$  to  $len(Q) - 1$  do
8:        $SoI_{d,k_i} = \alpha \sum_{j=0}^{len(Q)} S_{i,j} SoI_{d,j} + (1 - \alpha) Q_i$ 
9:        $diff \leftarrow diff + (SoI_{d,k} - SoI_{d,k-1})$ 
10:    end for
11:    if  $diff < MinDelta$  then
12:      break
13:    end if
14:  end for
15: end for
16: for  $p_1$  in  $P$  do
17:   for  $p_2$  in  $P$  do
18:      $Similarity_{p_1,p_2} \leftarrow CosSim(SOI_{p_1,p_2})$ 
19:   end for
20: end for
21: RecommendTopN()
```

3.1. Topic Clustering and Researcher Partition

It is a content-based method for topic clustering and researcher partition, which generates various domains and maps all researchers into these domains. In this work, we use a famous tool of Natural Language Processing (NLP) called word2vec, which provides an efficient implementation of the continuous of *bag-of-words* and *skip-gram* architectures for computing vector representations of words. It takes a text corpus as the input and produces the word vectors as the output. The final word vector file can be used as features in many NLP and

machine learning applications. The word vectors can be also used for deriving
145 word classes from huge data sets. This is achieved by performing K-means
clustering on top of the word vectors. The output is a vocabulary file with
words and their corresponding domain IDs. In the case of our CCRec model,
the input data is a set of titles from all the papers created by each researcher.
The titles are split in many sequential words. In addition, it is necessary to filter
150 out some irrelevant words, e.g. "of", "the", "and", etc. When extracting words
from titles, the set of preprocessed words can be used outline the core contents
of papers, which are signified as valuable and reliable corpus to denote a variety
of academic topics. With this English corpus, word2vec obtains various domains
and clusters the words into specific domains.

155 In addition, CCRec partitions researchers to specific domains through the
following methods: 1) Extract subject terms from a researcher's publications. 2)
Traverse all the terms and check the word vector. The model tags the researcher
for particular domains that contain these subject terms. It should be emphasized
that one researcher always belongs to several domains and there are also many
160 researchers in one domain. Fig. 2 illustrates an example. Assuming that CCRec
extracts 12 subject terms from the publications titles of researcher $S1$. After
topic clustering, we can see that, three of these subject terms are assigned to
domain A , seven in B , and two in C . Thus, researcher $S1$ is tagged for domains
 A , B and C . Through this method, each domain contains numerous researchers.

165 3.2. Feature Vector Calculation

As mentioned in section 2, in general, researchers devote themselves to sev-
eral adjacent domains. But in the case of attention and strength of influence
in various domains, there are often some biases. To measure the distribution of
researchers' interests, we define the Strength of Influence (SoI) to denote the
170 academic values (Rank Score) of researchers in different domains, which can be
regarded as the feature vector elements of researchers. Considering each of the
domains, there are numerous researchers with similar research interests. Their
co-author relationships can be modeled by a social network. Thus, there are

many co-author networks corresponding to different domains. The *SoI* is measured by RWR model based on the co-author networks. The core equation of the RWR model is shown in equation (1) below:

$$R_d^{(t+1)} = \alpha \mathbf{S} R_d^{(t)} + (1 - \alpha) q \quad (1)$$

where R_d represents the rank score vector of all researchers in domain d , q is the initial vector R^0 , and α denotes the damping coefficient. RWR is an iterative process. After limited iterations, the vector R will be convergent. In this scenario, $SoI_s = R_{d,s}$. That is, the final value of the vector item $R_{d,s}$ is the *SoI* of researcher s .

In addition, with the help of RWR, the *SoI* in various domains is quantified for each researcher. To measure researchers' academic feature, we define the vector F with *SoI*.

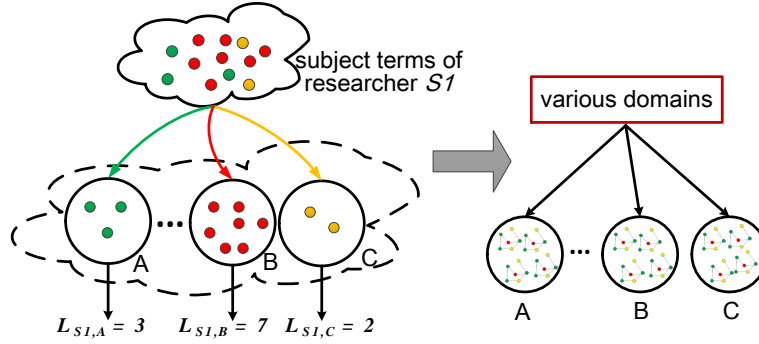


Figure 2: Researcher Partition

3.3. Collaboration Recommendation Based on Feature Vector Similarity

CCRec recommends collaborators for researchers based on their similarities. To measure the academic feature similarities of researchers, we borrow a standard method, *cosine similarity* (CS). CS is employed to define the similarity between two users s_1 and s_2 based on their feature vectors F_{s_1} and F_{s_2} .

$$Sim(s_1, s_2) = \frac{\sum_{i=1}^n (F_{s_1,i} * F_{s_2,i})}{\sqrt{\sum_{i=1}^n F_{s_1,i}^2} * \sqrt{\sum_{i=1}^n F_{s_2,i}^2}} \quad (2)$$

190 Finally, we consider that researchers with high similarities have common interests. Therefore, they should be recommended to each other as potential academic collaborators. Hence, CCRec provides a *TopN* recommendation list for each researcher.

4. Evaluation and Analysis

195 We conduct various experiments using data from DBLP [19], a computer science bibliography website hosted at University of Trier, Germany. We extracted the subsets of the entire data using the required information, which are all in the field of data mining involving 34 journals and 49 conferences. The data was modeled by an academic social network, which contains 59659 nodes (authors) and 90282 edges (coauthor relations). Moreover, as described in Table 1, the average degree is 1.531, and the number of the keywords is 104587. We divided the data set into two parts: the data before year 2011 as a training set, and the data after 2011 as a testing set.

205 We embarked on benchmarking experiments involving CCRec. To evaluate the performance of CCRec model in a better way, we employ three metrics that are widely used in the recommender systems: *Precision*, *Recall* and *F1* [20]. We compared CCRec with the following two approaches. ACRec: a random walk recommendation model based on collaboration networks [5]. CNRec: a common neighbors based recommendation model [2]. Four groups of experiments were conducted. These include: 1) Find the most valuable collaborators, who may have known each other before, or be active in adjacent circles, 2) Recommend most potential collaborators, who have never cooperated with the target researcher before, 3) Evaluate how domains clustering impact the performance of CCRec. For each experiment, there are 500 domains clustered. we randomly chose 100 constant researchers who are at least somewhat active in academic activities, that is they have co-authored more than 30 time with others. We generated collaborators recommendation for these 100 researchers, and then computed the average of precision, recall and *F1*.

Table 1: Statistics of Data Set from DBLP

Nodes	Edges	Average Degree	words
59659	90282	1.513	104587

All experiments were performed using a 64-bit Linux-based operation system, Ubuntu 12.04 with a 4-duo and 32GHz Intel CPU, 4-G Bytes memory. All the programs were implemented with Python.

4.1. Most Valuable Collaborators Recommendation

In our previous work [5], We proposed an ACRec model which generates the most valuable collaborators recommendation for researchers. In this section, we analyze the performance of CCRec and ACRec in terms of generating the most valuable collaborators recommendation. The comparative results are shown in Fig. 3.

As shown in Fig. 3, The number of recommended collaborators has an obvious influence on the metrics with a clear trend. In the case of CCRec, as shown in Fig. 3(a), the precision drops when the number of recommended collaborators is increasing. At the same time, the recall in Fig. 3(b) rises with the increase of recommendation list, which finally approximates to 20%. In the case of ACRec, it has the same trend with CCRec in terms of precision and recall. Thus it can be verified that precision and recall are a pair of contradictory metrics. In order to weigh the two metrics to maximize profit, G. Shani et al. [20] adopted the metric $F1$. Fig. 3(c) describes the performance of CCRec and ACRec on $F1$. In case of CCRec model, $F1$ generally increases until the number of recommended collaborators is over 15, and then decreases gradually. Since point 15 is exactly the peak of $F1$. We can see that, CCRec performs best when recommending 15 collaborators to each researcher, and the $F1$ can reach 6.13%. However, in this scenario, ACRec gets its' highest $F1$ score 11.01% at point 30.

A reflection of Fig. 3 substantiates that ACRec outperforms CCRec in terms of generating the most valuable collaborators recommendation. This is because,

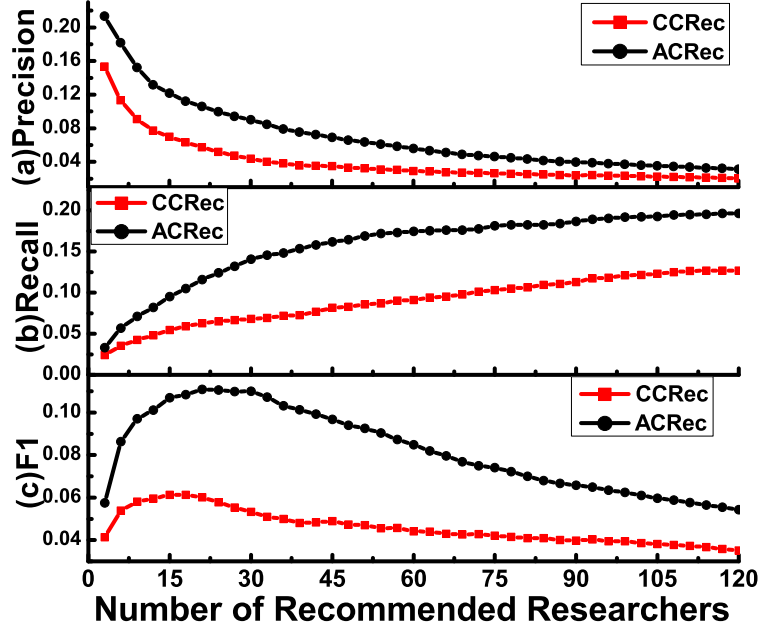


Figure 3: Performance of CCRec and ACRec on most valuable collaborators recommendation

ACRec is based on the link-importance guiding random walk, which considers the walk distance and rank score and seeks the most valuable collaborators who may have known each other before, or are active in adjacent circles. Thus, compared with ACRec, there is no obvious superiority for CCRec to find the most valuable collaborators in adjacent circles.

4.2. Most Potential Collaborators Recommendation

We define the Most Potential Collaborators as collaborators who are worthy of being recommended and have never cooperated with the target researcher. Generating recommendations pertaining to the most potential collaborators is of great significance as the new collaborators are more meaningful and practical in the reality of academia. In this section, we explored the performance of CCRec, ACRec and CCRec on making most valuable collaborators recommendation.

Figure 4 shows the performance of CCRec, ACRec and CNRec in terms

of precision, recall and $F1$ with the number of recommended collaborators increasing. It can be observed that CCRec significantly outperforms ACRec and CNRec all the time on these three metrics. CCRec shows a downwards trend for precision and an upwards trend for recall rate. In the case of $F1$, it reaches a peak of 4.18% when recommending 21 researchers. From Fig. 4, it is also evident that in relation to the generation of the most potential collaboration recommendations, ACRec outperforms CCRec in terms of the evaluation metrics we utilized.

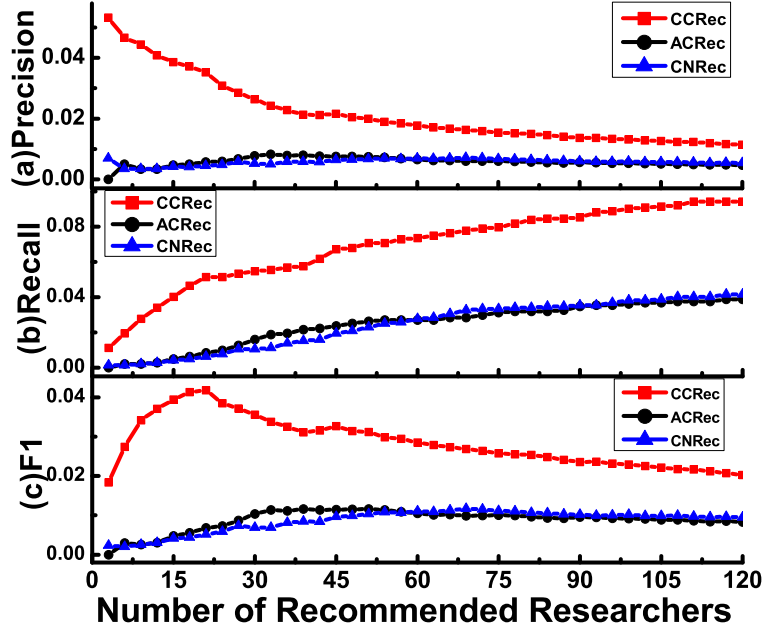


Figure 4: Performance of CCRec, ACRec and CNRec on most potential collaborators recommendation

Simply, CCRec outperforms ACRec and CNRec with higher precision, recall and $F1$ on making the most potential collaborators. Each researcher is represented by the feature vector, as well as CCRec model which combines publications contents and collaboration networks to define the vector. Such a procedure has distinct advantages (e.g. rich information, more accurately to

represent researchers' feature) in recommending new collaborators.

4.3. Impact of Clustered Domains Number

In this work, we clustered 500 topics based on DBLP data set and matched researchers to different domains. Here we analyzed the statistics of these domains. As described in Fig. 5, in terms of the number of researches in each domain, there are about 56 domains that contain up to 100 researchers, and two domains contain more than 2500 researchers. We can come to conclusion that, various domains show large different in scales. What's more, as shown in Fig. 5(b), most researchers are active in 2 to 20 domains. However, there is no clear standard to make the domains division. The statistics shows inconsistency with different clustering granularity. In this section, we exploit the impact of clustered domains number on the performance of CCRec.

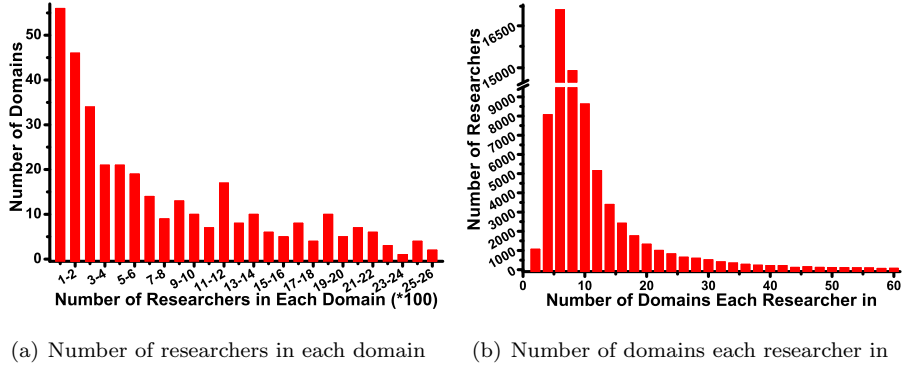


Figure 5: Statistics of data after topic clustering and researcher partition

We adopted the following experiment settings: (1) Evaluate how the precision, recall and $F1$ score change with the number of collaborators recommended, (2) Generate the most potential collaborators recommendation for those 100 researchers selected above and (3) Recommend 21 potential collaborators for each researcher. Fig. 6 shows the experimental results.

According to Fig. 6, the number of clustered domains do have certain effects on the performance of CCRec. If the number of clustered domains is

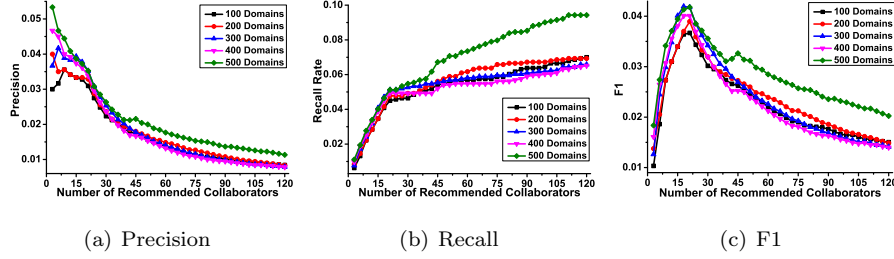


Figure 6: The impact of clustered domains number on CCRec

appropriate, the $F1$ score achieves some enhancement. In this situation, when
 290 clustering the data mining academia into 500 domains, CCRec performs best
 over precision, recall and $F1$ score.

In summary, our proposed model, which combines content-based and social
 network-based methods shows improvement. Furthermore, in terms of precision,
 recall and $F1$, CCRec outperforms ACRec and CNRec generating the most
 295 potential collaborators (MPCs) recommendations for academic researchers.

5. Conclusions

In this paper, we focused on how to find researchers' MPCs based on big
 scholarly data which is necessary in current academia. To this end, we proposed
 a novel recommendation model called CCRec, by combining the features of
 300 publications content and collaboration networks. A topic clustering model and
 a random walk model were adopted to obtain researchers features, and make
 MPCs recommendation for researchers. We conducted extensive experiments on
 a subset of DBLP data set to evaluate the performance of CCRec in comparison
 to other state-of-the-art methods: ACRec and CNRec. Our experimental results
 305 show that, CCRec outperforms ACRec and CNRec in terms of precision, recall
 and $F1$ score. Due to the utilization of a topic clustering model, the problem
 of topic drift in academic research has been solved to some extent.

Our research on CCRec reveals that the combination of content-based and
 network-based methods can improve the generation of effective academic collab-

310 orations. Nonetheless, there is still room for future study in this direction. We
 extracted the titles of publications as the corpus of the topic clustering model,
 which are not more comprehensive than the abstract and main body of publica-
 tions. Additionally, specific evaluation metrics should be utilized to evaluate the
 topic drift problem. As the future work, more experiments and studies should
 315 be conducted.

References

- [1] S. Lee, B. Bozeman, The impact of research collaboration on scientific
 productivity, *Social studies of science* 35 (5) (2005) 673–702.
- [2] G. R. Lopes, M. M. Moro, L. K. Wives, J. P. M. De Oliveira, Collaboration
 320 recommendation on academic social networks, in: *Advances in Conceptual
 Modeling–Applications and Challenges*, Springer, 2010, pp. 190–199.
- [3] S. D. Gollapalli, P. Mitra, C. L. Giles, Similar researcher search in academic
 environments, in: *Proc. ACM/IEEE JCDL*, 2012, pp. 167–170.
- [4] H.-N. Kim, A.-T. Ji, I. Ha, G.-S. Jo, Collaborative filtering based on col-
 325 laborative tagging for enhancing the quality of recommendation, *Electronic
 Commerce Research and Applications* 9 (1) (2010) 73–83.
- [5] J. Li, F. Xia, W. Wang, Z. Chen, N. Y. Asabere, H. Jiang, Acrec: a
 co-authorship based random walk model for academic collaboration recom-
 mendation, in: *Proc. WWW*, 2014, pp. 1209–1214.
- 330 [6] D. H. Lee, P. Brusilovsky, T. Schleyer, Recommending collaborators using
 social features and mesh terms, *Proceedings of the American Society for
 Information Science and Technology* 48 (1) (2011) 1–10.
- [7] H.-H. Chen, L. Gou, X. Zhang, C. L. Giles, Collabseer: a search engine for
 collaboration discovery, in: *Proc. ACM/IEEE JCDL*, 2011, pp. 231–240.
- 335 [8] S. Cohen, L. Ebel, Recommending collaborators using keywords, in: *Proc.
 WWW*, 2013, pp. 959–962.

- [9] C. Pan, W. Li, Research paper recommendation with topic analysis, in: ICCDA, Vol. 4, 2010, pp. V4–264.
- [10] M. C. Pham, Y. Cao, R. Klamma, M. Jarke, A clustering approach for collaborative filtering recommendation using social network analysis., J. UCS 17 (4) (2011) 583–604.
- [11] J. Chen, W. Geyer, C. Dugan, M. Muller, I. Guy, Make new friends, but keep the old: recommending people on social networking sites, in: Proc. SIGCHI, 2009, pp. 201–210.
- [12] J. DiMicco, D. R. Millen, W. Geyer, C. Dugan, B. Brownholtz, M. Muller, Motivations for social networking at work, in: Proce. ACM CSCW, 2008, pp. 711–720.
- [13] J. Tang, S. Wu, J. Sun, H. Su, Cross-domain collaboration recommendation, in: Proc. SIGKDD, 2012, pp. 1285–1293.
- [14] H. Ma, D. Zhou, C. Liu, M. R. Lyu, I. King, Recommender systems with social regularization, in: Proc. ACM WSDM, 2011, pp. 287–296.
- [15] T. Huynh, K. Hoang, D. Lam, Trend based vertex similarity for academic collaboration recommendation, in: Computational Collective Intelligence. Technologies and Applications, Springer, 2013, pp. 11–20.
- [16] H.-H. Chen, L. Gou, X. L. Zhang, C. L. Giles, Discovering missing links in networks using vertex similarity measures, in: Proc. ACM SAC, 2012, pp. 138–143.
- [17] Y. Sun, R. Barber, M. Gupta, C. C. Aggarwal, J. Han, Co-author relationship prediction in heterogeneous bibliographic networks, in: ASONAM, IEEE, 2011, pp. 121–128.
- [18] R. N. Lichtenwalter, J. T. Lussier, N. V. Chawla, New perspectives and methods in link prediction, in: Proc. SIGKDD, 2010, pp. 243–252.

- [19] M. Ley, Dblp: some lessons learned, Proceedings of the VLDB Endowment 2 (2) (2009) 1493–1500.
- ³⁶⁵ [20] G. Shani, A. Gunawardana, Evaluating recommendation systems, in: Recommender systems handbook, Springer, 2011, pp. 257–297.