

Exploiting Publication Contents and Collaboration Networks for Collaborator Recommendation

Huizhen Jiang^a, Zhen Chen^a, Haifeng Liu^a

^a*Dalian University of Technology, Dalian, China*

Abstract

In academia, previous researches have shown that researchers are usually prolific through effective collaboration. However, due to the expansion of academic research in diverse domains, the problem of finding the most relevant and potential collaborators (MPCs) from a large volume of big scholarly data has become cumbersome and time-consuming. In this work, we propose an academic collaborators recommendation model called CCRec. CCRec is an innovative model that combines content-based and social network-based methods. In order to effectively seek the most potential collaborators for researchers, we adopt a topic clustering model as well as a random walk model. Using DBLP data sets, we conduct benchmarking experiments to examine the performance of CCRec. The experimental results show that CCRec outperforms other state-of-the-art methods in precision, recall and $F1$ score.

Keywords: Collaboration recommendation, publication contents, collaboration networks, topic clustering, random walk model.

1. Introduction

Nowadays, the current scale of the Internet has risen beyond the imagination of people due to its rapid development. The Internet has gradually shown its ability of being the main carrier for sharing information. Consequently,
5 how to obtain useful and effective information has become a complex task as a result of information overload. Therefore, recommender systems and techniques

immensely help people by providing easier access to the specific resources they really need.

In academia, cooperation among researchers is of vital necessity. Researches
10 have shown that collaboration is relative to the productivity of a scholar [1].
Therefore, researchers tend to discover the most potential collaborators (MPC-
s), as well as reinforce the collaboration with the most valuable collaborators
(MVCs). MPCs, some influential scholars who have similar research interests
and have never collaborated with before. MPCs, some influential scholars or
15 colleagues who are active and valuable in adjacent circles and collaborated with
in the past.

Considering the inherent requirements, a variety of methods relating to col-
laborators recommendation have been proposed, which involve three main as-
pects, content-based, social network-based and hybrid recommendation. Some
20 traditional content-based methods extract researchers academic features through
tags of interest, user profiles, publications etc. They make collaborators rec-
ommendation based on computing interest similarities [2, 3, 4]. However, in
general, a researcher shows biasness in various academic domains. Such behav-
iors usually reveal academic features of researchers in different domains. Thus,
25 it is imperative to consider academic domains when recommending collabora-
tors. Our previous work proposed a social network-based model called ACRec
[5], which solved the problem of recommending MVCs. ACRec makes it easier
for scientists to collaborate with colleagues in their social networks. However,
many scientists also initiate collaborations outside of their social networks. It
30 is burdensome and fraught with risk of initiating collaboration with socially
unconnected researchers. Therefor, unconnected researchers (MPCs) are more
significant to be recommended. What’s more, some excellent hybrid models
have been introduced in recent years [6, 7, 8], which have paved the way for
many good references.

35 In this paper, we propose a novel hybrid model exploiting Publication Con-
tents and Collaboration Networks for Collaborators Recommendation (CCRec).
Utilizing a topic clustering model [9] [10] and a random walk model, CCRec in-

tegrates the features of publications contents and collaboration networks. We extract the subject terms from all researchers' publications and cluster these
40 terms into several topics, then distribute researchers to corresponding domains. To represent the feature vectors of each researcher, we run the random walk with restart model (RWR) on each domain, which has been proved to be competent for calculating the rank score of nodes in social networks. After that, the MPCs recommendation is provided by computing the similarities of researchers'
45 feature vectors.

In summary, we make the following contributions in this paper. 1) To compute the most potential collaborators recommendation, we develop a model CCRec, which combines the content-based and social network-based methods. By adopting this procedure, our approach is more favourable in terms of
50 achieving remarkable personalized collaborators recommendation. 2) To reveal researchers' academic features in different domains, we present the feature vectors by utilizing a topic clustering model and a random walk model. 3) Finally, conduct extensive experiments on a subset of DBLP data set to evaluate the performance of CCRec in various scenarios. Moreover, we measured our previous
55 ACRec model and the normal common neighbors-based model (CNRec) for comparison. Promising results are presented and analyzed.

The remainder of the paper is structured as follows. Section 2 briefly presents the related work. We discuss the details of our recommendation model in section 3, which highlights the structure of our recommendation model. In section 4,
60 we conduct a series of experiments and analyze the results. Finally, section 5 concludes the paper.

2. RELATED WORK

Collaboration plays an important role in academic research. A large aspect of work relating to academia focuses on two key issues, reinforcing and discovering
65 collaborators, which are respectively defined as MVCs recommendation and MPCs recommendation in this paper. Lopes et al. [2] worked on identifying

new partners to execute joint research and enhancing the cooperation of current partners for researchers. Chen et al. [11] proposed that the purpose of friends recommendation is "Make new friends, but keep the old". Research on enterprise
70 social networking [12] shows that users in a corporate context are interested in discovering valuable contacts not yet known to them, or connecting to weak ties, in addition to staying in touch with their close colleagues. Our previous work [5] focuses on recommending MVCs for researchers and enhancing the cooperation with colleagues in their academic social networks. In this work, CCRec has
75 an aptitude for discovering new collaborators with high similarity (i.e. MPCs recommendation).

In general, collaborators recommender systems are studied in three different perspectives according to the following methodologies used to perform recommendation: *content-based*, *social network-based* and *hybrid approach*. The
80 related work presented below correlate with these types of models.

content-based Content-based methods recommend items classified according to user profiles and early choices considering semantic issues. Das G. et al. [3] proposed models for computing the similarity between researchers based on expertise profiles extracted from their publications and academic homepages.
85 Lopes et al. [2] considered researchers' publications area and the vector space model to make collaboration recommendation. Kim et al. [4] proposed a collaborative filtering method to provide an enhanced recommendation quality derived from user-created tags. However, researchers often behave differently across multiple domains of interests, which might introduce topic drift problems
90 in general recommendation systems [13].

social network-based methods recommend items considering the structure of social networks or some social factors. Ma et al. [14] analyzed how social network information can benefit recommender systems and proposed a method of improving the performance of recommender systems by incorporating social
95 network information. T. Huynh et al. [15] proposed a method based on a combination of probability theory and graph theory for modeling and analysing co-author networks. They explored similar vertices of potential candidates for

collaboration recommendation. Their main contribution involves taking the trend information into considering when computing the similarity of vertices.

100 Many other approaches have been presented to formalize academic collaboration recommendation as a link prediction problem [16] [17] in social networks. Some of these approaches have been applied to large social networks and results show good performance. Lichtenwalter et al. [18] examined some important factors for link prediction and proposed a general framework, in addition to our previous

105 work [5].

hybrid methods combine content-based and social network-based method to integrate their benefits. Lee et al. [6] exploited how well content-based, social network-based and hybrid recommendation algorithms predict coauthor relationship, and results show that a hybrid algorithm combining content and

110 social networks information performs better. Chen et al. [7] discussed Collab-Seer, an open system to recommend potential research collaborators for scholars and scientists, which discovers collaborators based on the structure of coauthor networks and the user’s topic of research interests. Cohen et al. [8] also worked on solving the collaborators recommendation problem, by combining traditional

115 techniques for structural link prediction in social networks with textual relevancy and global importance metrics.

In summary, hybrid methods have evident superiorities in representing researchers features and making collaborators recommendation. Moreover, the topic drift problems should be well solved when recommend collaborators. In

120 this paper, We proposed CCRec model, which combined content-based and social network-based method, to discovery the MPCs in academic social networks.

3. DESIGN OF CCRec

Our proposed recommendation scheme for CCRec is inspired by the reality and truth that a researcher usually desires to know other researchers who

125 have similar research interests and strong influence in academia. As mentioned above, researchers often behave differently across multiple domains of interests.

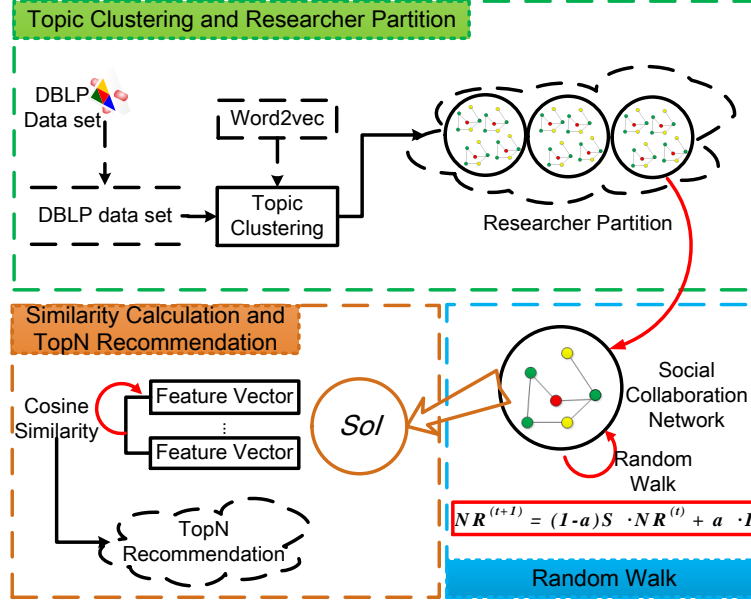


Figure 1: The architecture diagram of CCRec model

Such behaviors usually reveal the academic features of researchers in different domains. Besides, as a social-based model, the RWR model has been proved to be competent for calculating the rank score of nodes in social networks derived from co-authorship [5]. Researchers' strength of influence in specific domains can be well reflected by RWR. In this work, we first adopt a content-based method to acquire multiple domains of interests. With utilizing a content-based method, we then employ the social network-based method of RWR to measure the researchers' strength of influence in different domains. In the final step of our design, we use the feature vector to evaluate the similarity of researchers and then obtain the recommendation list. The detailed process is described below and the corresponding pseudo-code is illustrated in Algorithm 1. Fig. 1 depicts the three main components of CCRec.

Algorithm 1 CCRec(D)

```
1:  $SoI \leftarrow Init()$ 
2: for  $d$  in  $D$  do // Traverse domains set  $D$ .
3:    $\mathbf{S} \leftarrow ComputeTransferMatrix(d)$ 
4:    $SoI_{d,0}, R, Q \leftarrow InitVec()$ 
5:   for  $k \leftarrow 0$  to  $MaxIteration - 1$  do
6:      $diff \leftarrow 0$ 
7:     for  $i \leftarrow 0$  to  $len(Q) - 1$  do
8:        $SoI_{d,k_i} = \alpha \sum_{j=0}^{len(Q)} S_{i,j} SoI_{d,j} + (1 - \alpha) Q_i$ 
9:        $diff \leftarrow diff + (SoI_{d,k} - SoI_{d,k-1})$ 
10:    end for
11:    if  $diff < MinDelta$  then
12:      break
13:    end if
14:  end for
15: end for
16: for  $p_1$  in  $P$  do
17:   for  $p_2$  in  $P$  do
18:      $Similarity_{p_1,p_2} \leftarrow CosSim(SOI_{p_1,p_2})$ 
19:   end for
20: end for
21: RecommendTopN()
```

3.1. Topic Clustering and Researcher Partition

140 It is a content-based method for topic clustering and researcher partition,
which generates various domains and maps all researchers into these domains.
In this work, we use a famous tool of Natural Language Processing (NLP) called
word2vec, which provides an efficient implementation of the continuous of *bag-*
of-words and *skip-gram* architectures for computing vector representations of
145 words. It takes a text corpus as the input and produces the word vectors as the
output. The final word vector file can be used as features in many NLP and

machine learning applications. The word vectors can be also used for deriving word classes from huge data sets. This is achieved by performing K-means clustering on top of the word vectors. The output is a vocabulary file with words and their corresponding domain IDs. In the case of our CCRec model, the input data is a set of titles from all the papers created by each researcher. The titles are split in many sequential words. In addition, it is necessary to filter out some irrelevant words, e.g. "of", "the", "and", etc. When extracting words from titles, the set of preprocessed words can be used outline the core contents of papers, which are signified as valuable and reliable corpus to denote a variety of academic topics. With this English corpus, word2vec obtains various domains and clusters the words into specific domains.

In addition, CCRec partitions researchers to specific domains through the following methods (i) Extract subject terms from a researcher's publications and (ii) Traverse all the terms and check the word vector. The model tags the researcher for particular domains that contain these subject terms. It should be emphasized that one researcher always belongs to several domains and there are also many researchers in one domain. Fig. 2 illustrates an example. Assuming that CCRec extracts 12 subject terms from the publications titles of researcher *S1*. After topic clustering, we can see that, three of these subject terms are assigned to domain *A*, seven in *B*, and two in *C*. Thus, researcher *S1* is tagged for domains *A*, *B* and *C*. Through this method, each domain contains numerous researchers.

3.2. Feature Vector Calculation

As mentioned in section 2, in general, researchers devote themselves to several adjacent domains. But in the case of attention and strength of influence in various domains, there are often some biases. To measure the distribution of researchers' interests, we define the Strength of Influence (*SoI*) to denote the academic values (Rank Score) of researchers in different domains, which can be regarded as the feature vector elements of researchers. Considering each of the domains, there are numerous researchers with similar research interests. Their

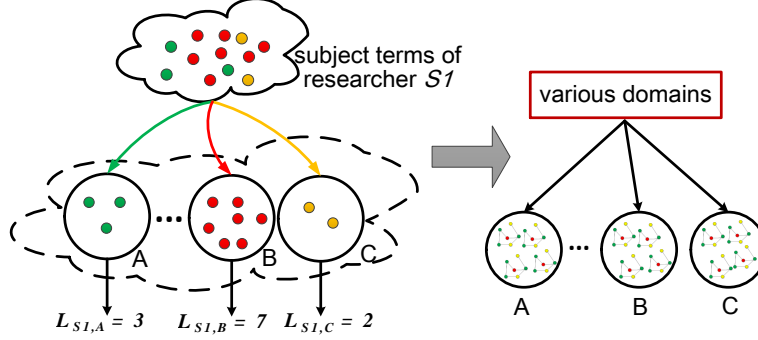


Figure 2: Researcher Partition

co-author relationships can be modeled by a social network. Thus, there are many co-author networks corresponding to different domains. The *SoI* is measured by RWR model based on the co-author networks. The core equation of the RWR model is shown in equation (1) below:

$$R_d^{(t+1)} = \alpha \mathbf{S} R_d^{(t)} + (1 - \alpha) q \quad (1)$$

where R_d represents the rank score vector of all researchers in domain d , q is the initial vector R^0 , and α denotes the damping coefficient. RWR is an iterative process. After limited iterations, the vector R will be convergent. In this scenario, $SoI_s = R_{d,s}$. That is, the final value of the vector item $R_{d,s}$ is the *SoI* of researcher s .

In addition, with the help of RWR, the *SoI* in various domains is quantified for each researcher. To measure researchers' academic feature, we define the vector F with *SoI*.

3.3. Collaboration Recommendation by Feature Vector Similarity

CCRec recommends collaborators for researchers based on their similarities. To measure the academic feature similarities of researchers, we borrow a standard method, *cosine similarity* (CS). CS is employed to define the similarity

between two users s_1 and s_2 based on their feature vectors F_{s_1} and F_{s_2} .

$$Sim(s_1, s_2) = \frac{\sum_{i=1}^n (F_{s_1,i} * F_{s_2,i})}{\sqrt{\sum_{i=1}^n F_{s_1,i}^2} * \sqrt{\sum_{i=1}^n F_{s_2,i}^2}} \quad (2)$$

Finally, we consider that researchers with high similarities have common interests. Therefore, they should be recommended to each other as potential academic collaborators. Hence, CCRec provides a *TopN* recommendation list for each researcher.

4. Evaluation and Analysis

We conduct various experiments using data from DBLP [19], a computer science bibliography website hosted at University of Trier, Germany. We extracted the subsets of the entire data using the required information, which are all in the field of data mining involving 34 journals and 49 conferences. The data was modeled by an academic social network, which contains 59659 nodes (authors) and 90282 edges (coauthor relations). Moreover, as described in Table 1, the average degree is 1.531, and the number of the keywords is 104587. We divided the data set into two parts: the data before year 2011 as a training set, and others as a testing set.

We embarked on benchmarking experiments involving CCRec. To evaluate the performance of CCRec model in a better way, we employ three metrics which are widely used in the recommender systems, *Precision*, *Recall* and *F1* [20]. We compared CCRec with the two following approaches. ACRec: a random walk recommendation model based on collaboration networks [5]. CNRec: a common neighbors based recommendation model [2]. Four groups of experiments were conducted. These include: 1) Find the most valuable collaborators, who may have known each other before, or be active in adjacent circles, 2) Recommend most potential collaborators, who have never cooperated with the target researcher before, 3) Evaluate how domains clustering impact the performance of CCRec. For each experiment, there are 500 domains were clustered which matched to all researchers. we randomly chose 100 constant researchers who are

Table 1: Statistics of Data Set from DBLP

Statistics	Nodes	Edges	Average Degree	words
Number	59659	90282	1.513	104587

at least somewhat active in academic activities, that is they have co-authored more than 30 person-time with others. We generated collaborators recommendation for these 100 researchers, and then computed the average of precision, recall and $F1$.

All experiments were performed using a 64-bit Linux-based operation system, Ubuntu 12.04 with a 4-duo and 32GHz Intel CPU, 4-G Bytes memory. All the programs were implemented with Python.

4.1. Most Valuable Collaborators Recommendation

In our previous work [5], We proposed an ACRec model which generates the most valuable collaborators recommendation for researchers. In this section, we analyze the performance of CCRec and ACRec in terms of generating the most valuable collaborators recommendation. The comparative results are shown in Fig. 3.

As shown in Fig. 3, The number of recommended collaborators has an obvious influence on the metrics with a clear trend. In the case of CCRec, as shown in Fig. 3(a), the precision drops when the number of recommended collaborators is increasing. At the same time, the recall in Fig. 3(b) rises with the increase of recommendation list, which finally approximates to 20%. In the case of ACRec, it has the same trend with CCRec in terms of precision and recall. Thus it can be verified that precision and recall are a pair of contradictory metrics. In order to weigh the two metrics to maximize profit, G. Shani et al. [20] adopted the metric $F1$. Fig. 3(c) describes the performance of CCRec and ACRec on $F1$. In case of CCRec model, $F1$ generally increases until the number of recommended collaborators is over 15, and then decreases gradually. Since point 15 is exactly the peak of $F1$. We can see that, CCRec performs best when

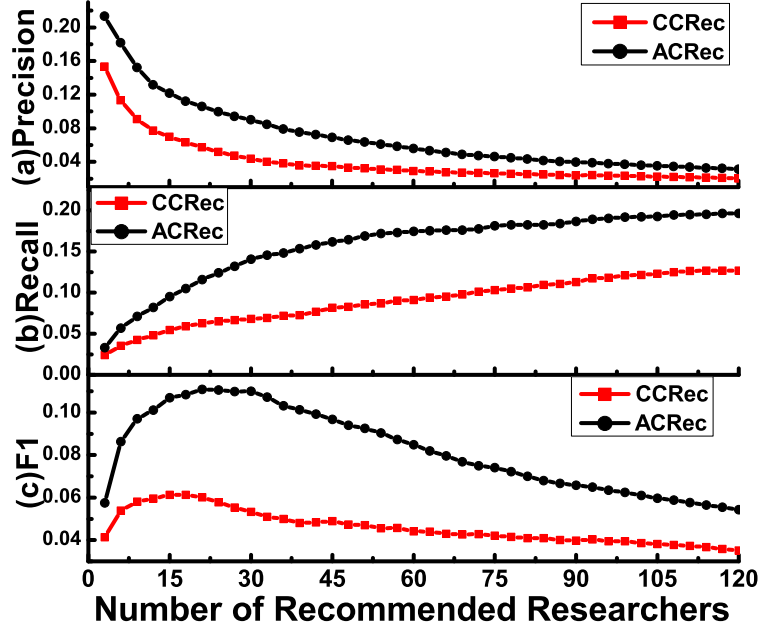


Figure 3: Performance of CCRec and ACRec on most valuable collaborators recommendation

recommending 15 collaborators to each researcher, and the $F1$ can reach 6.13%. However, in this scenario, ACRec gets its' highest $F1$ score 11.01% at point 30.

A reflection of Fig. 3 substantiates that ACRec outperforms CCRec in terms of generating the most valuable collaborators recommendation. This is because, ACRec is based on the link-importance guiding random walk, which considers the walk distance and rank score and seeks the most valuable collaborators who may have known each other before, or are active in adjacent circles. Thus, compared with ACRec, there is no obvious superiority for CCRec to find the most valuable collaborators in adjacent circles.

4.2. Most Potential Collaborators Recommendation

We define the Most Potential Collaborators as collaborators who are worthy of being recommended and have never cooperated with the target researcher. Generating recommendations pertaining to the most potential collaborators is of

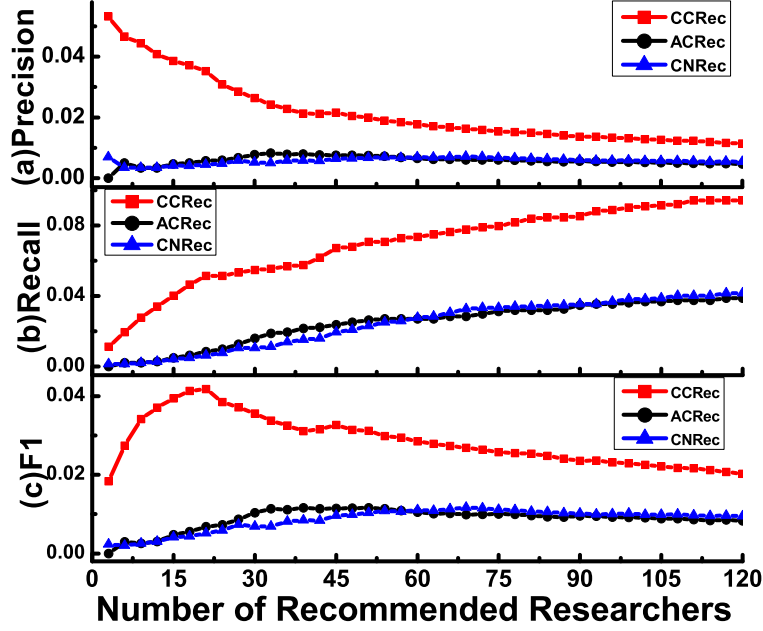


Figure 4: Performance of CCRec, ACRec and CNRec on most potential collaborators recommendation

great significance as the new collaborators are more meaningful and practical in the reality of academia. In this section, we explored the performance of CCRec, ACRec and CNRec on making most valuable collaborators recommendation.

Figure 4 shows the performance of CCRec, ACRec and CNRec in terms of precision, recall and $F1$ with the number of recommended collaborators increasing. It can be observed that CCRec significantly outperforms ACRec and CNRec all the time on these three metrics. CCRec shows a downwards trend for precision and an upwards trend for recall rate. In the case of $F1$, it reaches a peak of 4.18% when recommending 21 researchers. From Fig. 4, it is also evident that in relation to the generation of the most potential collaboration recommendations, ACRec outperforms CCRec in terms of the evaluation metrics we utilized.

In a nutshell, CCRec outperforms ACRec and CNRec with higher precision,

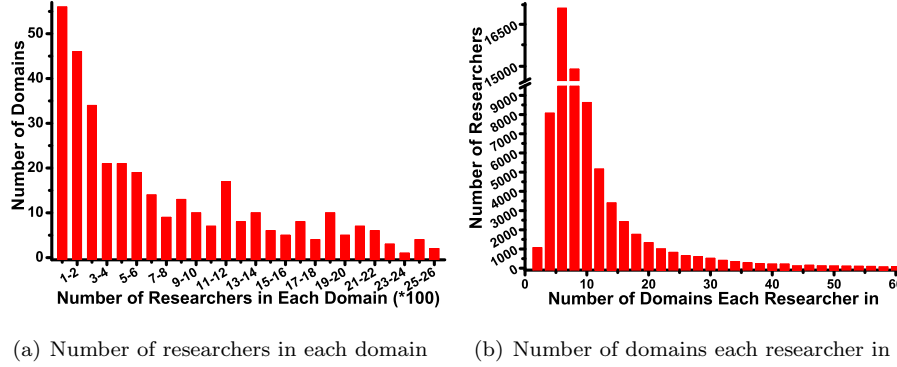


Figure 5: Statistics of data after topic clustering and researcher partition

recall and $F1$ on making the most potential collaborators. Each researcher is represented by the feature vector, as well as CCRec model which combines publications contents and collaboration networks to define the vector. Such a procedure has distinct advantages (e.g. rich information, more accurately to represent researchers' feature) in recommending new collaborators.

4.3. Impact of clustered Domains number

In this work, we clustered 500 topics based on DBLP data set and matched researchers to different domains. Here we analyzed the statistics of these domains. As described in Fig. 5, in terms of the number of researches in each domain, there are about 56 domains that contain up to 100 researchers, and two domains contain more than 2500 researchers. We can come to the conclusion that, various domains show large differences in scales, most of the domains keep scale no more than 1000 researchers. What's more, as shown in Fig. 5(b), most researchers are active in 2 to 20 domains. However, there is no clear standard to make the domains division. The statistics shows changeful with different clustering granularity. In this section, we exploit the impact of clustered domains number on the performance of CCRec.

We adopted the following experiment settings: (1) Evaluate how the precision, recall and $F1$ score change with the number of collaborators recommended,

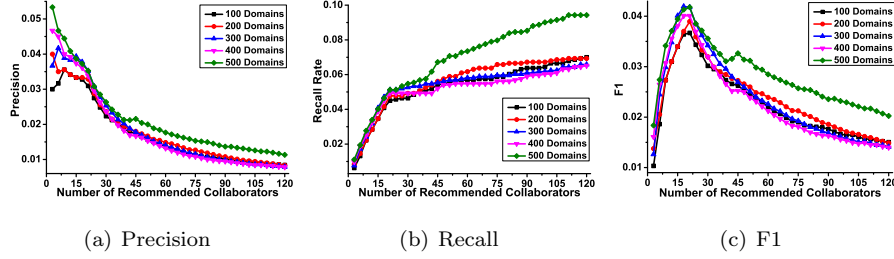


Figure 6: The impact of clustered domains number on CCRec

290 (2) Generate the most potential collaborators recommendation for those 100 researchers selected above and (3) Recommend 21 potential collaborators for each researcher. Fig. 6 shows the experimental results.

According to Fig. 6, the number of clustered domains does have certain effects on the performance of CCRec. If the number of clustered domains is appropriate, the $F1$ score achieves some enhancement. In this situation, when
 295 clustering the data mining academia into 500 domains, CCRec performs best over precision, recall and $F1$ score.

In summary, our proposed model, which combines content-based and social network-based methods is really effective. Furthermore, in terms of precision,
 300 recall and $F1$, CCRec outperforms ACRec and CNRec generating the most potential collaborators (MPCs) recommendations for academic researchers.

5. Conclusions

In this paper, we focused on how to find researchers' MPCs based on big scholarly data which is necessary in current academia. To this end, we proposed
 305 a novel recommendation model called CCRec, by combining the features of publications content and collaboration networks. A topic clustering model and a random walk model were adopted to obtain scholars features, and make MPCs recommendation for researchers. We conducted extensive experiments on a subset of DBLP data set to evaluate the performance of CCRec in comparison to
 310 other state-of-the-art methods, namely: ACRec and CNRec. Our experimental

results show that, CCRec outperforms ACRec and CNRec in terms of precision, recall and $F1$ score. Due the the utilization of a topic clustering model, the problem of topic drift in academic research has been solved to some extent.

Our research on CCRec reveals that the combination of content-based and
 315 network-based methods can improve the generation of effective academic collaborations. Nonetheless, there is still room for future study in this direction. We extracted the titles of publications as the corpus of the topic clustering model, which are not more comprehensive than the abstract and main body of publications. Additionally, specific evaluation metrics should be utilized to evaluate the
 320 topic drift problem. As the future work, more experiments and studies should be conducted.

References

- [1] S. Lee, B. Bozeman, The impact of research collaboration on scientific productivity, *Social studies of science* 35 (5) (2005) 673–702.
- 325 [2] G. R. Lopes, M. M. Moro, L. K. Wives, J. P. M. De Oliveira, Collaboration recommendation on academic social networks, in: *Advances in Conceptual Modeling–Applications and Challenges*, Springer, 2010, pp. 190–199.
- [3] S. D. Gollapalli, P. Mitra, C. L. Giles, Similar researcher search in academic environments, in: *Proc. ACM/IEEE JCDL*, 2012, pp. 167–170.
- 330 [4] H.-N. Kim, A.-T. Ji, I. Ha, G.-S. Jo, Collaborative filtering based on collaborative tagging for enhancing the quality of recommendation, *Electronic Commerce Research and Applications* 9 (1) (2010) 73–83.
- [5] J. Li, F. Xia, W. Wang, Z. Chen, N. Y. Asabere, H. Jiang, Acrec: a co-authorship based random walk model for academic collaboration recom-
 335 mendation, in: *Proc. WWW*, 2014, pp. 1209–1214.
- [6] D. H. Lee, P. Brusilovsky, T. Schleyer, Recommending collaborators using social features and mesh terms, *Proceedings of the American Society for Information Science and Technology* 48 (1) (2011) 1–10.

- [7] H.-H. Chen, L. Gou, X. Zhang, C. L. Giles, Collabseer: a search engine for
340 collaboration discovery, in: Proc. ACM/IEEE JCDL, 2011, pp. 231–240.
- [8] S. Cohen, L. Ebel, Recommending collaborators using keywords, in: Proc.
WWW, 2013, pp. 959–962.
- [9] C. Pan, W. Li, Research paper recommendation with topic analysis, in:
ICCDA, Vol. 4, 2010, pp. V4–264.
- [10] M. C. Pham, Y. Cao, R. Klamka, M. Jarke, A clustering approach for
345 collaborative filtering recommendation using social network analysis., J.
UCS 17 (4) (2011) 583–604.
- [11] J. Chen, W. Geyer, C. Dugan, M. Muller, I. Guy, Make new friends, but
keep the old: recommending people on social networking sites, in: Proc.
350 SIGCHI, 2009, pp. 201–210.
- [12] J. DiMicco, D. R. Millen, W. Geyer, C. Dugan, B. Brownholtz, M. Muller,
Motivations for social networking at work, in: Proce. ACM CSCW, 2008,
pp. 711–720.
- [13] J. Tang, S. Wu, J. Sun, H. Su, Cross-domain collaboration recommenda-
355 tion, in: Proc. SIGKDD, 2012, pp. 1285–1293.
- [14] H. Ma, D. Zhou, C. Liu, M. R. Lyu, I. King, Recommender systems with
social regularization, in: Proc.ACM WSDM, 2011, pp. 287–296.
- [15] T. Huynh, K. Hoang, D. Lam, Trend based vertex similarity for academic
collaboration recommendation, in: Computational Collective Intelligence.
360 Technologies and Applications, Springer, 2013, pp. 11–20.
- [16] H.-H. Chen, L. Gou, X. L. Zhang, C. L. Giles, Discovering missing links in
networks using vertex similarity measures, in: Proc. ACM SAC, 2012, pp.
138–143.

- [17] Y. Sun, R. Barber, M. Gupta, C. C. Aggarwal, J. Han, Co-author relationship prediction in heterogeneous bibliographic networks, in: ASONAM, IEEE, 2011, pp. 121–128.
- [18] R. N. Lichtenwalter, J. T. Lussier, N. V. Chawla, New perspectives and methods in link prediction, in: Proc. SIGKDD, 2010, pp. 243–252.
- [19] M. Ley, Dblp: some lessons learned, Proceedings of the VLDB Endowment 2 (2) (2009) 1493–1500.
- [20] G. Shani, A. Gunawardana, Evaluating recommendation systems, in: Recommender systems handbook, Springer, 2011, pp. 257–297.