

Exploiting Publication Contents and Collaboration Networks for Collaborator Recommendation

--Manuscript Draft--

Manuscript Number:	PONE-D-15-06764
Article Type:	Research Article
Full Title:	Exploiting Publication Contents and Collaboration Networks for Collaborator Recommendation
Short Title:	Exploiting Contents and Networks for Collaborator Recommendation
Corresponding Author:	Feng Xia Dalian University of Technology Dalian, CHINA
Keywords:	collaboration recommendation; academic social networks; most valuable collaborators; most potential collaborators; recommender systems
Abstract:	Thanks to the proliferation of online social networks, it has become conventional for researchers to communicate and collaborate with each other. Meanwhile, one critical challenge arises, that is, how to find the most relevant and potential collaborators for each researcher? In this work, we propose a novel collaborator recommendation model called CCRec, which combines the information on researchers' publications and collaboration network to generate better recommendation. In order to effectively identify the most potential collaborators for researchers, we adopt a topic clustering model to identify the academic domains, as well as a random walk model to compute researchers' feature vectors. Using DBLP datasets, we conduct benchmarking experiments to examine the performance of CCRec. The experimental results show that CCRec outperforms other state-of-the-art methods in terms of precision, recall and F1 score.
Order of Authors:	Xiangjie Kong Huizhen Jiang Haifeng Liu Zhen Chen Zhenzhen Xu Feng Xia Amr Tolba
Opposed Reviewers:	
Additional Information:	
Question	Response
Financial Disclosure Please describe all sources of funding that have supported your work. A complete funding statement should do the following: Include grant numbers and the URLs of any funder's website. Use the full name, not acronyms, of funding institutions, and use initials to identify authors who received the funding. Describe the role of any sponsors or	This work was partially supported by National Natural Science Foundation of China under Grants No. 61203165 (XK) and 51209036 (ZX). URL: http://www.nsfc.gov.cn/ The funders had no role in study design, data collection and analysis, decision to publish, or preparation of the manuscript.

<p>fund-ers in the study design, data collection and analysis, decision to publish, or preparation of the manuscript. If they had no role in any of the above, include this sentence at the end of your statement: "<i>The funders had no role in study design, data collection and analysis, decision to publish, or preparation of the manuscript.</i>"</p> <p>If the study was unfunded, provide a statement that clearly indicates this, for example: "<i>The author(s) received no specific funding for this work.</i>"</p> <p>* typeset</p>	
<p>Competing Interests</p> <p>You are responsible for recognizing and disclosing on behalf of all authors any competing interest that could be perceived to bias their work, acknowledging all financial support and any other relevant financial or non-financial competing interests.</p> <p>Do any authors of this manuscript have competing interests (as described in the PLOS Policy on Declaration and Evaluation of Competing Interests)?</p> <p>If yes, please provide details about any and all competing interests in the box below. Your response should begin with this statement: <i>I have read the journal's policy and the authors of this manuscript have the following competing interests:</i></p> <p>If no authors have any competing interests to declare, please enter this statement in the box: "<i>The authors have declared that no competing interests exist.</i>"</p> <p>* typeset</p>	<p>The authors have declared that no competing interests exist.</p>
<p>Ethics Statement</p> <p>You must provide an ethics statement if your study involved human participants, specimens or tissue samples, or</p>	<p>N/A</p>

vertebrate animals, embryos or tissues. All information entered here should **also be included in the Methods section** of your manuscript. Please write "N/A" if your study does not require an ethics statement.

Human Subject Research (involved human participants and/or tissue)

All research involving human participants must have been approved by the authors' Institutional Review Board (IRB) or an equivalent committee, and all clinical investigation must have been conducted according to the principles expressed in the [Declaration of Helsinki](#). Informed consent, written or oral, should also have been obtained from the participants. If no consent was given, the reason must be explained (e.g. the data were analyzed anonymously) and reported. The form of consent (written/oral), or reason for lack of consent, should be indicated in the Methods section of your manuscript.

Please enter the name of the IRB or Ethics Committee that approved this study in the space below. Include the approval number and/or a statement indicating approval of this research.

Animal Research (involved vertebrate animals, embryos or tissues)

All animal work must have been conducted according to relevant national and international guidelines. If your study involved non-human primates, you must provide details regarding animal welfare and steps taken to ameliorate suffering; this is in accordance with the recommendations of the Weatherall report, "[The use of non-human primates in research](#)." The relevant guidelines followed and the committee that approved the study should be identified in the ethics statement.

If anesthesia, euthanasia or any kind of animal sacrifice is part of the study, please include briefly in your statement which substances and/or methods were applied.

<p>Please enter the name of your Institutional Animal Care and Use Committee (IACUC) or other relevant ethics board, and indicate whether they approved this research or granted a formal waiver of ethical approval. Also include an approval number if one was obtained.</p> <p>Field Permit</p> <p>Please indicate the name of the institution or the relevant body that granted permission.</p>	
<p>Data Availability</p> <p>PLOS journals require authors to make all data underlying the findings described in their manuscript fully available, without restriction and from the time of publication, with only rare exceptions to address legal and ethical concerns (see the PLOS Data Policy and FAQ for further details). When submitting a manuscript, authors must provide a Data Availability Statement that describes where the data underlying their manuscript can be found.</p> <p>Your answers to the following constitute your statement about data availability and will be included with the article in the event of publication. Please note that simply stating 'data available on request from the author' is not acceptable. If, however, your data are only available upon request from the author(s), you must answer "No" to the first question below, and explain your exceptional situation in the text box provided.</p> <p>Do the authors confirm that all data underlying the findings described in their manuscript are fully available without restriction?</p>	<p>Yes - all data are fully available without restriction</p>
<p>Please describe where your data may be found, writing in full sentences. Your answers should be entered into the box below and will be published in the form you provide them, if your manuscript is accepted. If you are copying our sample text below, please ensure you replace any instances of XXX with the appropriate details.</p> <p>If your data are all contained within the paper and/or Supporting Information files, please state this in your answer below.</p>	<p>All relevant data are within the paper and its Supporting Information files.</p>

For example, “All relevant data are within the paper and its Supporting Information files.”

If your data are held or will be held in a public repository, include URLs, accession numbers or DOIs. For example, “All XXX files are available from the XXX database (accession number(s) XXX, XXX).” If this information will only be available after acceptance, please indicate this by ticking the box below. If neither of these applies but you are able to provide details of access elsewhere, with or without limitations, please do so in the box below. For example:

“Data are available from the XXX Institutional Data Access / Ethics Committee for researchers who meet the criteria for access to confidential data.”

“Data are from the XXX study whose authors may be contacted at XXX.”

* typeset

Additional data availability information:

Cover Letter

Dear Editor,

We would like to submit our **Research Article** entitled “Exploiting Publication Contents and Collaboration Networks for Collaborator Recommendation”, which we wish to be considered for publication in PLOS ONE. No conflict of interest exists in the submission of this manuscript. I would like to declare on behalf of my co-authors that the work described was original research that has not been published previously, and not under consideration for publication elsewhere, in whole or in part. All the authors listed have approved the manuscript that is enclosed.

In academia, researchers with the same or similar research directions usually collaborate to discuss scheme, design experiments, write papers, etc. Recently, due to the proliferation of online social networks, it has become conventional for researchers to communicate and collaborate with each other. However, how to find the most relevant and potential collaborators for a researcher? To address this issue, in this work we propose a novel recommendation model called CCRec, which combines the information on researchers' publications and collaboration networks to generate better collaborator recommendation. In order to effectively identify the most potential collaborators for researchers, we adopt a topic clustering model to identify the academic domains, as well as a random walk model to compute researchers' feature vectors. Using DBLP data sets, we conduct benchmarking experiments to examine the performance of CCRec. The experimental results show that CCRec outperforms other state-of-the-art methods in terms of precision, recall and F1 score.

This is the first time we submit this manuscript to PLOS ONE. There are no prior interactions with PLOS ONE regarding this manuscript.

There are several related works for academic collaboration recommendation. We have reviewed related works in the literature in the manuscript. Two of the most recent publications closely related to this work are list below, which use conceptually different algorithms.

Li J, Xia F, Wang W, Chen Z, Asabere NY, et al. (2014) ACRec: a co-authorship based random walk model for academic collaboration recommendation. In: Proc. WWW. pp. 1209–1214.

Xia F, Chen Z, Wang W, Li J, Yang LT (2014) MVCWalker: Random walk based most valuable collaborators recommendation exploiting academic factors. IEEE Trans Emerg Top Comput 2:285 364-375.

We hope that the manuscript meets the high standards of your journal. We are looking forward to receiving a favorable response from you regarding the acceptance of this manuscript. If you have any further concerns, please don't hesitate to contact me.

Sincerely yours,

Feng Xia

f.xia@ieee.org

Exploiting Publication Contents and Collaboration Networks for Collaborator Recommendation

Xiangjie Kong¹, Huizhen Jiang¹, Haifeng Liu¹, Zhen Chen¹, Zhenzhen Xu^{1*}, Feng Xia¹, Amr Tolba^{2,3}

1 School of Software, Dalian University of Technology, China

2 Riyadh Community College, King Saud University, Saudi Arabia

3 Mathematics and Computer Science Department, Faculty of Science, Menoufia University, Egypt

*** Corresponding author; E-mail: xzz@dlut.edu.cn (ZX)**

Abstract

Thanks to the proliferation of online social networks, it has become conventional for researchers to communicate and collaborate with each other. Meanwhile, one critical challenge arises, that is, how to find the most relevant and potential collaborators for each researcher? In this work, we propose a novel collaborator recommendation model called CCRec, which combines the information on researchers' publications and collaboration network to generate better recommendation. In order to effectively identify the most potential collaborators for researchers, we adopt a topic clustering model to identify the academic domains, as well as a random walk model to compute researchers' feature vectors. Using DBLP datasets, we conduct benchmarking experiments to examine the performance of CCRec. The experimental results show that CCRec outperforms other state-of-the-art methods in terms of precision, recall and F1 score.

Introduction

The current scale of the Internet has risen beyond the imagination of people due to its rapid development. Consequently, how to obtain useful and effective information has become a complex task as a result of information overload. Recommender systems and techniques reduce the problems and immensely help people by providing easier access to the relevant resources they really need.

Collaboration among researchers often occurs and it has been shown that research collaboration has impact on scientific productivity [1]. Therefore, collaboration recommendation becomes very necessary and has been attracting more and more researchers in recent years. Generally, collaboration recommendation can be grouped into two classes: 1) to recommend the most potential collaborators (MPCs) who have never collaborated with the target (i.e. to build new collaborations); 2) to recommend the most valuable collaborators (MVCs) who have ever collaborated with the target before (i.e. to reinforce old collaborations). Lopes et al. [2] worked on identifying new partners to execute joint research and enhancing the collaboration of current partners for researchers. Chen et al. [3] proposed that the purpose of friends recommendation is to make new friends and keep the old. Research on enterprise social networking [4] shows that users in a corporate context are interested in discovering valuable contacts not yet known to them, or connecting to weak ties, in addition to staying in touch

with their close colleagues. Our previous work [5,6] focuses on recommending MVCs for researchers and enhancing the collaboration with colleagues in their academic social networks. In this work, in contrast, CCRec has an aptitude for discovering new collaborators with high similarity (i.e. MPCs recommendation).

Considering the inherent requirements, a variety of methods related to collaborators recommendation have been proposed, which involve three main aspects: content-based, social network-based and hybrid recommendation. Some traditional content-based methods extract researchers' academic features through tags of interests, user profiles, publications, etc. Gollapalli et al. [7] proposed models for computing the similarity between researchers based on expertise profiles extracted from their publications and academic home pages. Lopes et al. [2] considered researchers' publications area and the vector space model to make collaboration recommendation. Kim et al. [8] proposed a collaborative filtering method to provide an enhanced recommendation quality derived from user-created tags. However, researchers often behave differently across multiple domains of interests, which might introduce topic drift problems in general recommendation systems [9]. Furthermore, a researcher often shows bias on various academic domains. Such behaviors usually reveal academic features of researchers in different domains. Thus, it is imperative to consider academic domains when recommending collaborators.

Ma et al. [10] analyzed how social network information can benefit recommender systems and proposed a method of improving the performance of recommender systems by incorporating social network information. Huynh et al. [11] proposed a method based on a combination of probability theory and graph theory for modeling and analysing co-author networks. They explored similar vertices of potential candidates for collaboration recommendation. Their main contribution involves taking the trend information into considering when computing the similarity of vertices. Many other approaches [12,13] have been presented to formalize academic collaboration recommendation as a link prediction problem in social networks. Some of these approaches have been applied to large social networks and the relevant results show good performance. Lichtenwalter et al. [14] examined some important factors for link prediction and proposed a general framework, in addition to our previous work [5,6]. Besides, in our previous work we proposed two social network-based models respectively called ACRec [5] and MVCWalker [6], both of which solved the problem of recommending MVCs. ACRec enables the collaborated researchers to collaborate with each other again. However, many scientists also initiate collaborations outside of their social networks. It is burdensome and fraught with risk of initiating collaboration with socially unconnected researchers. Therefore, unconnected researchers (MPCs) might be valuable to be recommended.

Some hybrid collaboration recommendation models have been introduced in recent years. Lee et al. [15] exploited how well content-based, social network-based and hybrid recommendation algorithms predict coauthor relationship. The given results show that a hybrid algorithm combining content and social networks information performs better. Some other brilliant hybrid algorithms can be found in e.g. [16], [17] and [18]. Recently, Chaiwanarom et al. [19] proposed a new hybrid algorithm for recommending appropriate collaborators in interdisciplinary computer science using degrees of collaborative forces, temporal evolution of research interest, and comparative seniority status. The result shows that it is effective and innovative. However, there are also some issues concerning the recommendation in other research fields besides computer science. Chen et al. [20] discussed CollabSeer, an open system to recommend potential research collaborators for researchers and scientists. They discovered collaborators based on the structure of coauthor networks and the user's topic of research interests. This previous work, along with e.g. [21], stimulated our

inspiration to introduce a topic model in CCRec.

Here we propose a novel hybrid model by exploiting publication contents and collaboration networks for collaborators recommendation (CCRec). In summary, we make the following contributions in this paper: 1) To compute the most potential collaborators recommendation, we develop a model CCRec, which combines the content-based and social network-based methods. By adopting this procedure, our approach is more favourable in terms of achieving remarkable personalized collaborators recommendation. 2) To reveal researchers' academic features in different domains, we present the feature vectors by utilizing a topic clustering model and a random walk model. 3) We conduct extensive experiments on a subset of DBLP data set to evaluate the performance of CCRec in various scenarios. Moreover, we measured our previous ACRec model and the normal common neighbors-based model (CNRec) for comparison. Promising results are presented and analyzed.

Methods

Our proposed recommendation scheme for CCRec is inspired by the reality and truth that a researcher usually desires to know other researchers who have similar research interests and strong influence in academia. As mentioned above, researchers often behave differently across multiple domains of interests. Such behaviors usually reveal the academic features of researchers in different domains. Besides, as a social-based model, the RWR model has been proved to be competent for calculating the rank score of nodes in social networks derived from co-authorship [5]. Researchers' strength of influence in specific domains can be well reflected by RWR. In this work, we first adopt a content-based method to acquire multiple domains of interests. Secondly, we employ the social network-based method of RWR to measure the researchers' strength of influence in different domains. In the final step of our design, we use the feature vector to evaluate the similarity of researchers and then obtain the recommendation list. The detailed process is described below and the corresponding pseudo-code is illustrated in Pseudo-code of the proposed scheme. Figure 1 depicts the three main components of CCRec.

Figure 1. The architecture of CCRec. Depicts the three main components of CCRec: topic clustering and researcher partition, random walk, similarity calculation and top-N recommendation.

Topic Clustering and Researcher Partition

It is a content-based method for topic clustering and researcher partition, which generates various domains and maps all researchers into these domains. In this work, we use a famous tool of Natural Language Processing (NLP) called word2vec, which provides an efficient implementation of the continuous of *bag-of-words* and *skip-gram* architectures for computing vector representations of words. It takes a text corpus as the input and produces the word vectors as the output. The final word vector file can be used as features in many NLP and machine learning applications. The word vectors can be also used for deriving word classes from huge data sets. This is achieved by performing K-means clustering on top of the word vectors. The output is a vocabulary file with words and their corresponding domain IDs. In the case of our CCRec model, the input data is a set of titles from all the papers created by each researcher. The titles are split in many sequential words. In addition, it is necessary to filter out some irrelevant words, e.g. "of", "the", "and", etc. When extracting words from titles, the

Algorithm 1 Pseudo-code of the proposed scheme

```

1:  $SoI \leftarrow Init()$ 
2: for  $d$  in  $D$  do // Traverse domains set  $D$ .
3:    $S \leftarrow ComputeTransferMatrix(d)$ 
4:    $SoI_{d,0}, R, Q \leftarrow InitVec()$ 
5:   for  $k \leftarrow 0$  to  $MaxIteration - 1$  do
6:      $diff \leftarrow 0$ 
7:     for  $i \leftarrow 0$  to  $len(Q) - 1$  do
8:        $SoI_{d,k,i} = \alpha \sum_{j=0}^{len(Q)} S_{i,j} SoI_{d,j} + (1 - \alpha) Q_i$ 
9:        $diff \leftarrow diff + (SoI_{d,k} - SoI_{d,k-1})$ 
10:    end for
11:    if  $diff < MinDelta$  then
12:      break
13:    end if
14:  end for
15: end for
16: for  $p_1$  in  $P$  do
17:   for  $p_2$  in  $P$  do
18:      $Similarity_{p_1,p_2} \leftarrow CosSim(SOI_{p_1,p_2})$ 
19:   end for
20: end for
21: RecommendTopN()

```

set of preprocessed words can be used outline the core contents of papers, which are signified as valuable and reliable corpus to denote a variety of academic topics. With this English corpus, word2vec obtains various domains and clusters the words into specific domains.

In addition, CCRec partitions researchers to specific domains through the following methods: 1) Extract subject terms from a researcher's publications. 2) Traverse all the terms and check the word vector. The model tags the researcher for particular domains that contain these subject terms. It should be emphasized that one researcher always belongs to several domains and there are also many researchers in one domain. Figure 2 illustrates an example. Assuming that CCRec extracts 12 subject terms from the publications titles of researcher $S1$. After topic clustering, we can see that, three of these subject terms are assigned to domain A , seven in B , and two in C . Thus, researcher $S1$ is tagged for domains A , B and C . Through this method, each domain contains numerous researchers.

Figure 2. Researcher Partition. Illustrates an example of partition researchers to several domains.

Feature Vector Calculation

As mentioned in section 2, in general, researchers devote themselves to several adjacent domains. But in the case of attention and strength of influence in various domains, there are often some biases. To measure the distribution of researchers' interests, we define the Strength of Influence (SoI) to denote the academic values (Rank Score) of researchers in different domains, which can be regarded as the feature vector elements of researchers. Considering each of the domains, there are numerous researchers with similar research interests. Their co-author relationships can be

modeled by a social network. Thus, there are many co-author networks corresponding to different domains. The *SoI* is measured by RWR model based on the co-author networks. The core equation of the RWR model is shown in Eq. (1) below:

$$R_d^{(t+1)} = \alpha S R_d^{(t)} + (1 - \alpha)q \quad (1)$$

where R_d represents the rank score vector of all researchers in domain d , q is the initial vector R^0 , and α denotes the damping coefficient. RWR is an iterative process. After limited iterations, the vector R will be convergent. In this scenario, $SoI_s = R_{d,s}$. That is, the final value of the vector item $R_{d,s}$ is the *SoI* of researcher s .

In addition, with the help of RWR, the *SoI* in various domains is quantified for each researcher. To measure researchers' academic feature, we define the vector F with *SoI*.

Collaboration Recommendation Based on Feature Vector Similarity

CCRec recommends collaborators for researchers based on their similarities. To measure the academic feature similarities of researchers, we borrow a standard method, *cosine similarity* (CS), as shown in Eq. (2). CS is employed to define the similarity between two users s_1 and s_2 based on their feature vectors F_{s_1} and F_{s_2} .

$$Sim(s_1, s_2) = \frac{\sum_{i=1}^n (F_{s_1,i} * F_{s_2,i})}{\sqrt{\sum_{i=1}^n F_{s_1,i}^2} * \sqrt{\sum_{i=1}^n F_{s_2,i}^2}} \quad (2)$$

Finally, we consider that researchers with high similarities have common interests. Therefore, they should be recommended to each other as potential academic collaborators. Hence, CCRec provides a *Top-N* recommendation list for each researcher.

Results

We conduct various experiments using data from DBLP [22], a computer science bibliography website hosted at University of Trier, Germany. We extracted the subsets of the entire data using the required information, which are all in the field of data mining involving 34 journals and 49 conferences. The data was modeled by an academic social network, which contains 59659 nodes (authors) and 90282 edges (coauthor relations). Moreover, as described in Table 1, the average degree is 1.531, and the number of the keywords is 104587. We divided the data set into two parts: the data before year 2011 as a training set, and the data after 2011 as a testing set.

Table 1. Statistics of Data Set from DBLP

Nodes	Edges	Average Degree	words
59659	90282	1.513	104587

We embarked on benchmarking experiments involving CCRec. To evaluate the performance of CCRec model in a better way, we employ three metrics that are widely used in the recommender systems: *Precision*, *Recall* and *F1* [23]. We compared CCRec with the following two approaches. ACRec: a random walk recommendation model based on collaboration networks [5]. CNRec: a common neighbors based recommendation model [2]. Four groups of experiments were conducted. These include: 1) Find the most valuable collaborators, who may have known each other

before, or be active in adjacent circles, 2) Recommend most potential collaborators, who have never cooperated with the target researcher before, 3) Evaluate how domains clustering impact the performance of CCRec. For each experiment, there are 500 domains clustered. we randomly chose 100 constant researchers who are at least somewhat active in academic activities, that is they have co-authored more than 30 time with others. We generated collaborators recommendation for these 100 researchers, and then computed the average of precision, recall and $F1$.

All experiments were performed using a 64-bit Linux-based operation system, Ubuntu 12.04 with a 4-duo and 32GHz Intel CPU, 4-G Bytes memory. All the programs were implemented with Python.

Most Valuable Collaborators Recommendation

In our previous work [5], We proposed an ACRec model which generates the most valuable collaborators recommendation for researchers. In this section, we analyze the performance of CCRec and ACRec in terms of generating the most valuable collaborators recommendation. The comparative results are shown in Figure 3.

Figure 3. Performance of CCRec and ACRec on most valuable collaborators recommendation. The abscissas denote the length of recommendation list. The ordinates respectively represent the values of precision, recall and $F1$.

As shown in Figure 3, The number of recommended collaborators has an obvious influence on the metrics with a clear trend. In the case of CCRec, as shown in Figure 3(A), the precision drops when the number of recommended collaborators is increasing. At the same time, the recall in Figure 3(B) rises with the increase of recommendation list, which finally approximates to 20%. In the case of ACRec, it has the same trend with CCRec in terms of precision and recall. Thus it can be verified that precision and recall are a pair of contradictory metrics. In order to weigh the two metrics to maximize profit, G. Shani et al. [23] adopted the metric $F1$. Figure 3(C) describes the performance of CCRec and ACRec on $F1$. In case of CCRec model, $F1$ generally increases until the number of recommended collaborators is over 15, and then decreases gradually. Since point 15 is exactly the peak of $F1$. We can see that, CCRec performs best when recommending 15 collaborators to each researcher, and the $F1$ can reach 6.13%. However, in this scenario, ACRec gets its' highest $F1$ score 11.01% at point 30.

A reflection of Figure 3 substantiates that ACRec outperforms CCRec in terms of generating the most valuable collaborators recommendation. This is because, ACRec is based on the link-importance guiding random walk, which considers the walk distance and rank score and seeks the most valuable collaborators who may have known each other before, or are active in adjacent circles. Thus, compared with ACRec, there is no obvious superiority for CCRec to find the most valuable collaborators in adjacent circles.

Most Potential Collaborators Recommendation

We define the Most Potential Collaborators as collaborators who are worthy of being recommended and have never cooperated with the target researcher. Generating recommendations pertaining to the most potential collaborators is of great significance as the new collaborators are more meaningful and practical in the reality of academia. In this section, we explored the performance of CCRec, ACRec and CCRec on making most valuable collaborators recommendation.

Figure 4 shows the performance of CCRec, ACRec and CNRec in terms of precision, recall and $F1$ with the number of recommended collaborators increasing. It can be observed that CCRec significantly outperforms ACRec and CNRec all the time on these three metrics. CCRec shows a downwards trend for precision and an upwards trend for recall rate. In the case of $F1$, it reaches a peak of 4.18% when recommending 21 researchers. From Figure 4, it is also evident that in relation to the generation of the most potential collaboration recommendations, ACRec outperforms CCRec in terms of the evaluation metrics we utilized.

Figure 4. Performance of CCRec, ACRec and CNRec on most potential collaborators recommendation. The abscissas denote the length of recommendation list. The ordinates respectively represent the values of precision, recall and $F1$.

Simply, CCRec outperforms ACRec and CNRec with higher precision, recall and $F1$ on making the most potential collaborators. Each researcher is represented by the feature vector, as well as CCRec model which combines publications contents and collaboration networks to define the vector. Such a procedure has distinct advantages (e.g. rich information, more accurately to represent researchers' feature) in recommending new collaborators.

Impact of Clustered Domains Number

In this work, we clustered 500 topics based on DBLP data set and matched researchers to different domains. Here we analyzed the statistics of these domains. As described in Figure 5, in terms of the number of researches in each domain, there are about 56 domains that contain up to 100 researchers, and two domains contain more than 2500 researchers. We can come to conclusion that, various domains show large different in scales. What's more, as shown in Figure 5(B), most researchers are active in 2 to 20 domains. However, there is no clear standard to make the domains division. The statistics shows inconsistency with different clustering granularity. In this section, we exploit the impact of clustered domains number on the performance of CCRec.

Figure 5. Statistics of data after topic clustering and researcher partition

We adopted the following experiment settings: (1) Evaluate how the precision, recall and $F1$ score change with the number of collaborators recommended, (2) Generate the most potential collaborators recommendation for those 100 researchers selected above and (3) Recommend 21 potential collaborators for each researcher. Figure 6 shows the experimental results.

Figure 6. The impact of clustered domains number on CCRec. The abscissas denote the length of recommendation list. The ordinates respectively represent the values of precision, recall and $F1$.

According to Figure 6, the number of clustered domains do have certain effects on the performance of CCRec. If the number of clustered domains is appropriate, the $F1$ score achieves some enhancement. In this situation, when clustering the data mining academia into 500 domains, CCRec performs best over precision, recall and $F1$ score.

In summary, our proposed model, which combines content-based and social network-based methods shows improvement. Furthermore, in terms of precision, recall and $F1$, CCRec outperforms ACRec and CNRec generating the most potential collaborators (MPCs) recommendations for academic researchers.

Conclusions

In this paper, we focused on how to find researchers' MPCs based on big scholarly data which is necessary in current academia. To this end, we proposed a novel recommendation model called CCRec, by combining the features of publications content and collaboration networks. A topic clustering model and a random walk model were adopted to obtain researchers features, and make MPCs recommendation for researchers. We conducted extensive experiments on a subset of DBLP data set to evaluate the performance of CCRec in comparison to other state-of-the-art methods: ACRec and CNRec. Our experimental results show that, CCRec outperforms ACRec and CNRec in terms of precision, recall and *F1* score. Due the the utilization of a topic clustering model, the problem of topic drift in academic research has been solved to some extent.

Our research on CCRec reveals that the combination of content-based and network-based methods can improve the generation of effective academic collaborations. Nonetheless, there is still room for future study in this direction. We extracted the titles of publications as the corpus of the topic clustering model, which are not more comprehensive than the abstract and main body of publications. Additionally, specific metrics should be utilized to evaluate the impact of topic drift. As future work, more experiments and studies will be conducted.

References

1. Lee S, Bozeman B (2005) The impact of research collaboration on scientific productivity. *Soc Stud Sci* 35: 673–702.
2. Lopes GR, Moro MM, Wives LK, De Oliveira JPM (2010) Collaboration recommendation on academic social networks. In: *Advances in Conceptual Modeling—Applications and Challenges*, Springer. pp. 190–199.
3. Chen J, Geyer W, Dugan C, Muller M, Guy I (2009) Make new friends, but keep the old: recommending people on social networking sites. In: *Proc. SIGCHI*. pp. 201–210.
4. DiMicco J, Millen DR, Geyer W, Dugan C, Brownholtz B, et al. (2008) Motivations for social networking at work. In: *Proce. ACM CSCW*. pp. 711–720.
5. Li J, Xia F, Wang W, Chen Z, Asabere NY, et al. (2014) Acrec: a co-authorship based random walk model for academic collaboration recommendation. In: *Proc. WWW*. pp. 1209–1214.
6. Xia F, Chen Z, Wang W, Li J, Yang LT (2014) Mvwalker: Random walk based most valuable collaborators recommendation exploiting academic factors. *IEEE Trans Emerg Top Comput* 2: 364–375.
7. Gollapalli SD, Mitra P, Giles CL (2012) Similar researcher search in academic environments. In: *Proc. ACM/IEEE JCDL*. pp. 167–170.
8. Kim HN, Ji AT, Ha I, Jo GS (2010) Collaborative filtering based on collaborative tagging for enhancing the quality of recommendation. *Electron Commer Res Appl* 9: 73–83.
9. Tang J, Wu S, Sun J, Su H (2012) Cross-domain collaboration recommendation. In: *Proc. SIGKDD*. pp. 1285–1293.

10. Ma H, Zhou D, Liu C, Lyu MR, King I (2011) Recommender systems with social regularization. In: Proc. ACM WSDM. pp. 287–296.
11. Huynh T, Hoang K, Lam D (2013) Trend based vertex similarity for academic collaboration recommendation. In: Computational Collective Intelligence. Technologies and Applications, Springer. pp. 11–20.
12. Chen HH, Gou L, Zhang XL, Giles CL (2012) Discovering missing links in networks using vertex similarity measures. In: Proc. ACM SAC. pp. 138–143.
13. Sun Y, Barber R, Gupta M, Aggarwal CC, Han J (2011) Co-author relationship prediction in heterogeneous bibliographic networks. In: Proc. IEEE ASONAM, pp. 121–128.
14. Lichtenwalter RN, Lussier JT, Chawla NV (2010) New perspectives and methods in link prediction. In: Proc. SIGKDD. pp. 243–252.
15. Lee DH, Brusilovsky P, Schleyer T (2011) Recommending collaborators using social features and mesh terms. Proceedings of the American Society for Information Science and Technology 48: 1–10.
16. Cohen S, Ebel L (2013) Recommending collaborators using keywords. In: Proc. WWW. pp. 959–962.
17. Petertonkoker J, Reinhardt W, Surve J, Sureka P (2014) Scientific recommendations to enhance scholarly awareness and foster collaboration. In: Recommender Systems for Technology Enhanced Learning, Springer. pp. 283–306.
18. Xia F, Asabere NY, Liu H, Chen Z, Wang W (2014) Socially aware conference participant recommendation with personality traits. IEEE Systems Journal, in press; DOI: 10.1109/JSYST.2014.2342375.
19. Chaiwanarom P, Lursinsap C (2015) Collaborator recommendation in interdisciplinary computer science using degrees of collaborative forces, temporal evolution of research interest, and comparative seniority status. Knowledge-Based Systems 75: 161–172
20. Chen HH, Gou L, Zhang X, Giles CL (2011) Collabseer: a search engine for collaboration discovery. In: Proc. ACM/IEEE JCDL. pp. 231–240.
21. Li C, Cheung WK, Ye Y, Zhang X, Chu D, Li X (2014) The Author-Topic-Community model for author interest profiling and community discovery. Knowledge and Information Systems, in press; DOI: 10.1007/s10115-014-0764-9.
22. Ley M (2009) Dblp: some lessons learned. Proceedings VLDB Endowment 2: 1493–1500.
23. Shani G, Gunawardana A (2011) Evaluating recommendation systems. In: Recommender systems handbook, Springer. pp. 257–297.

Figure 1
[Click here to download Figure: Fig1.eps](#)

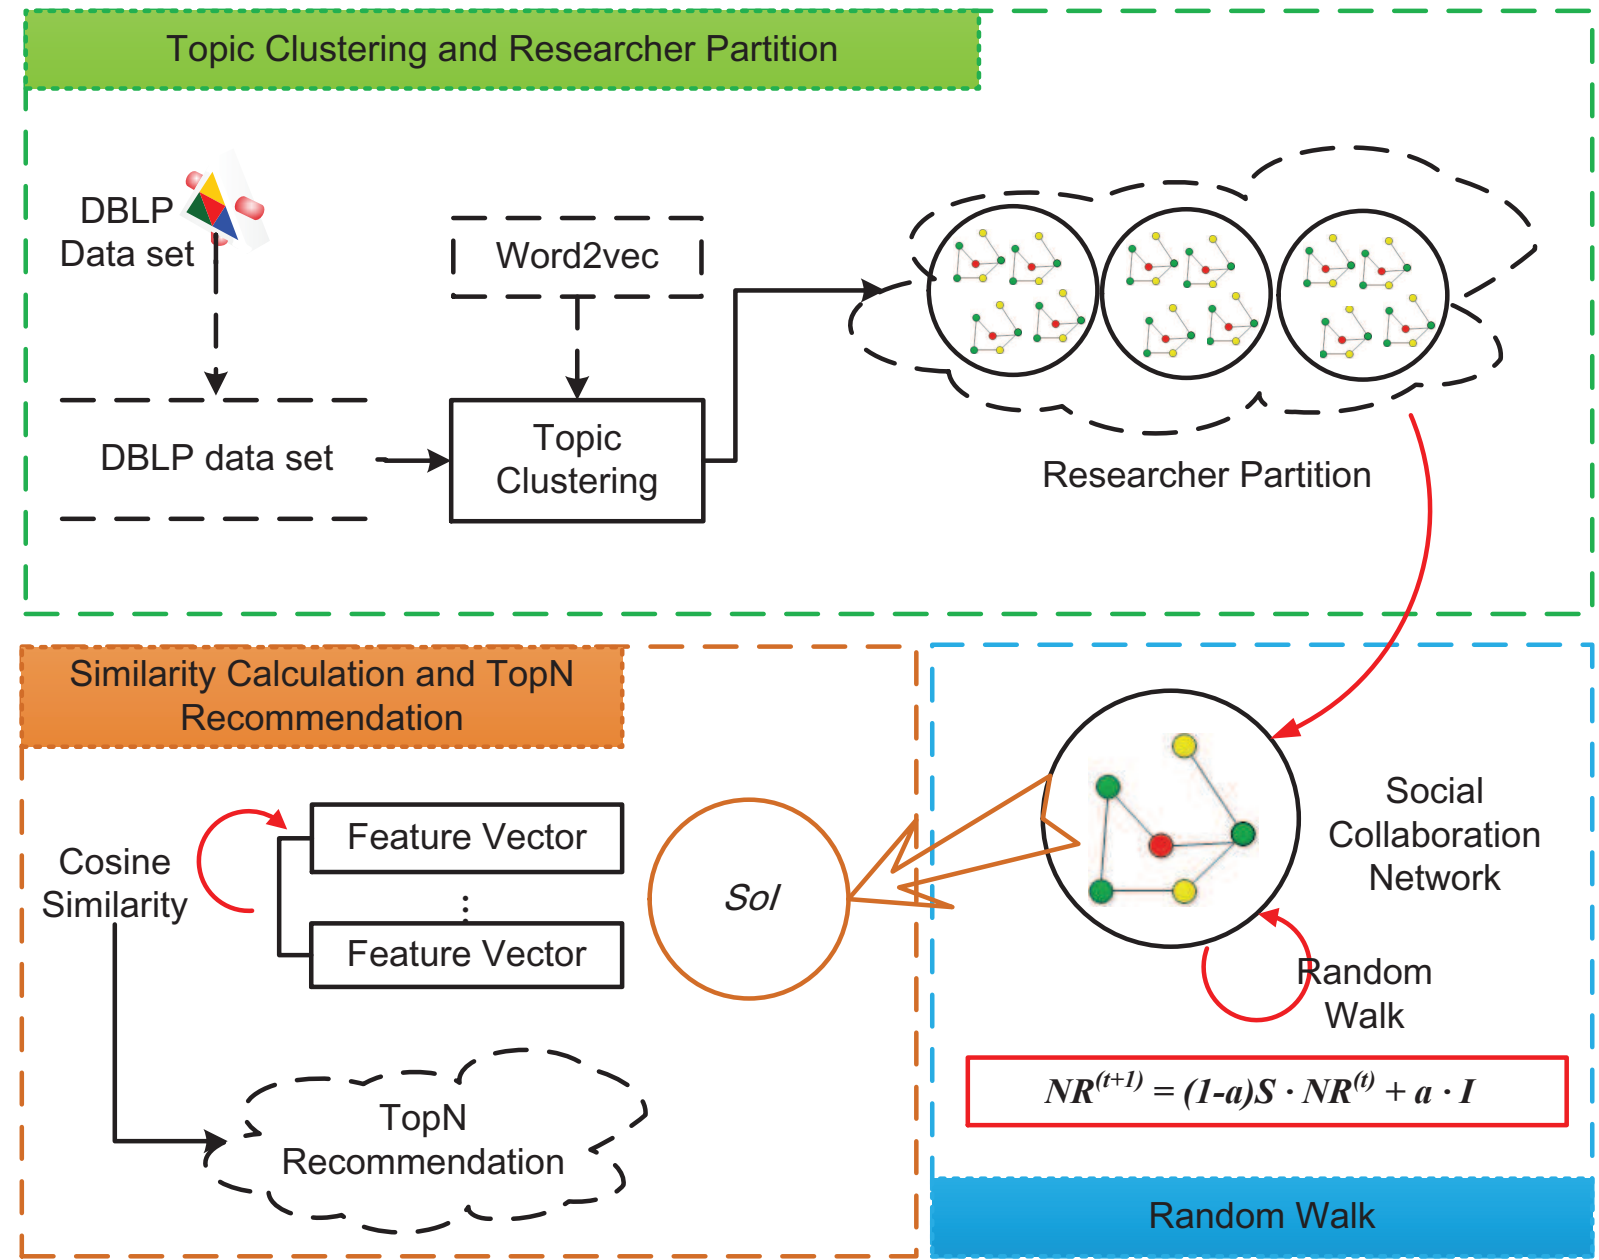


Figure 2
[Click here to download Figure: Fig2.eps](#)

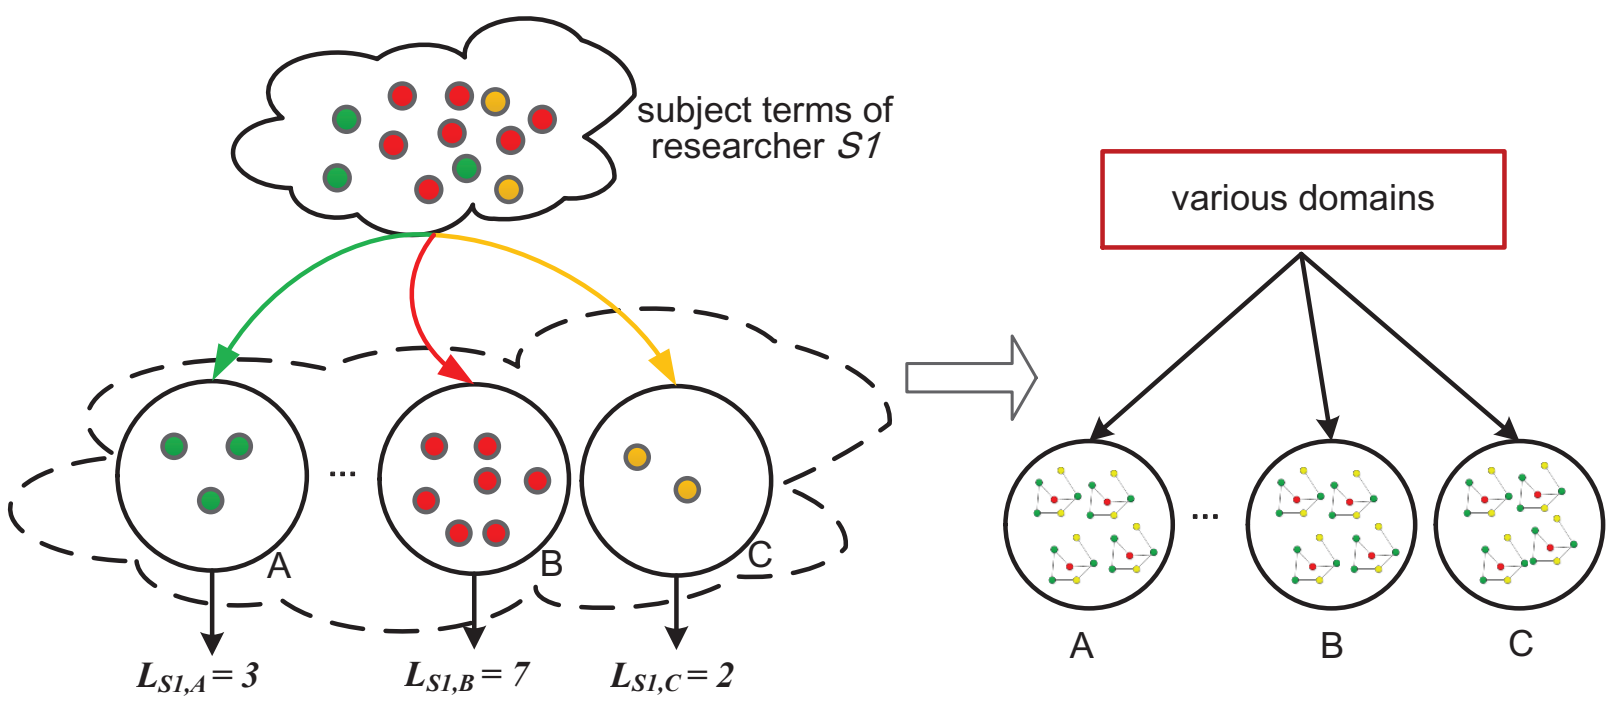


Figure 3
[Click here to download Figure: Fig3.eps](#)

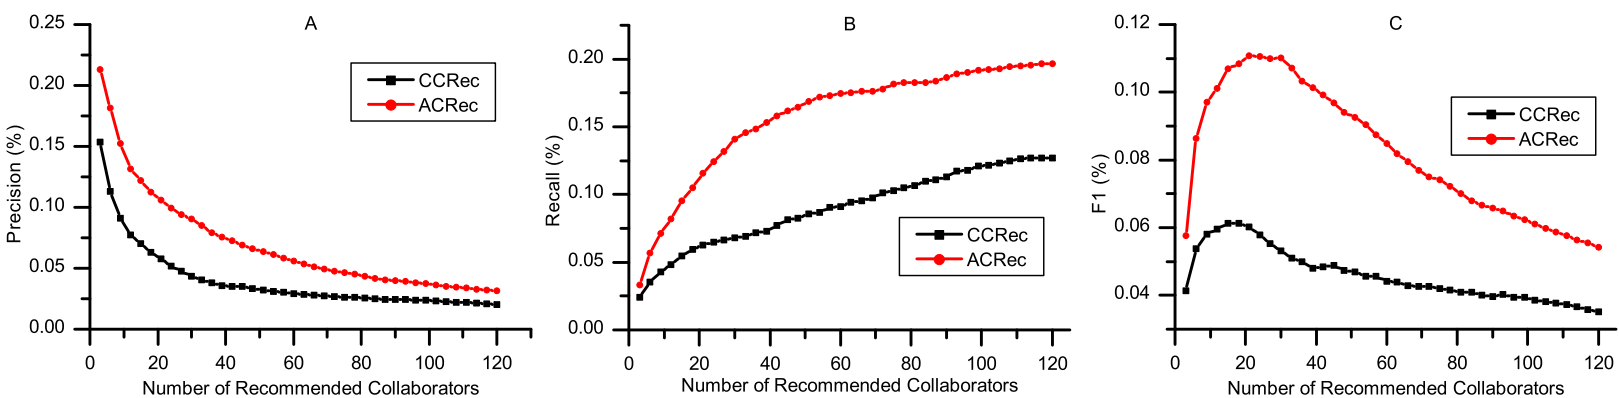


Figure 4
[Click here to download Figure: Fig4.eps](#)

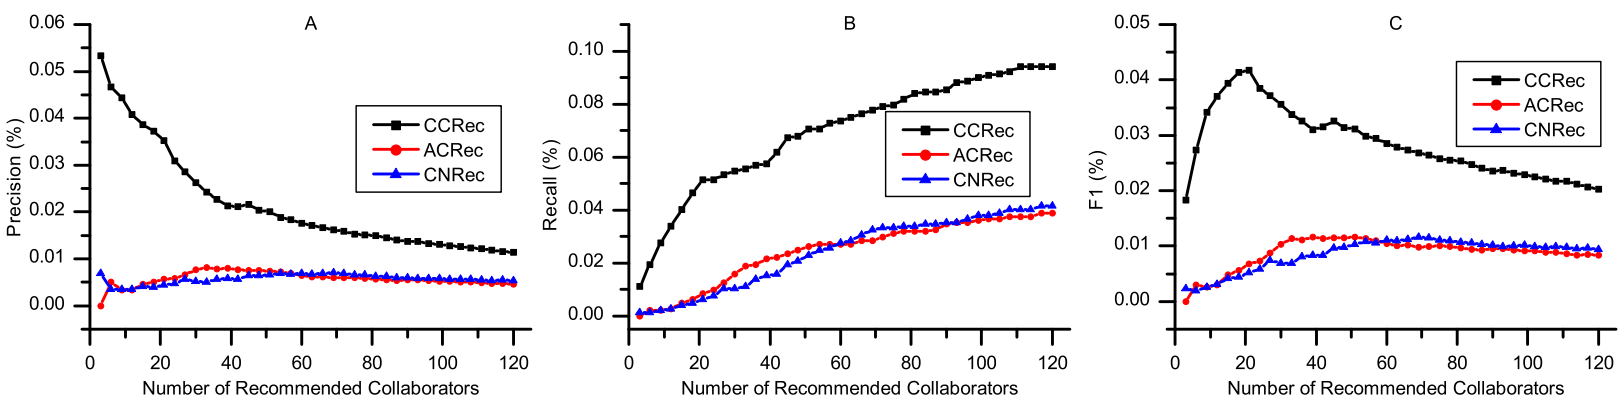


Figure 5
[Click here to download Figure: Fig5.eps](#)

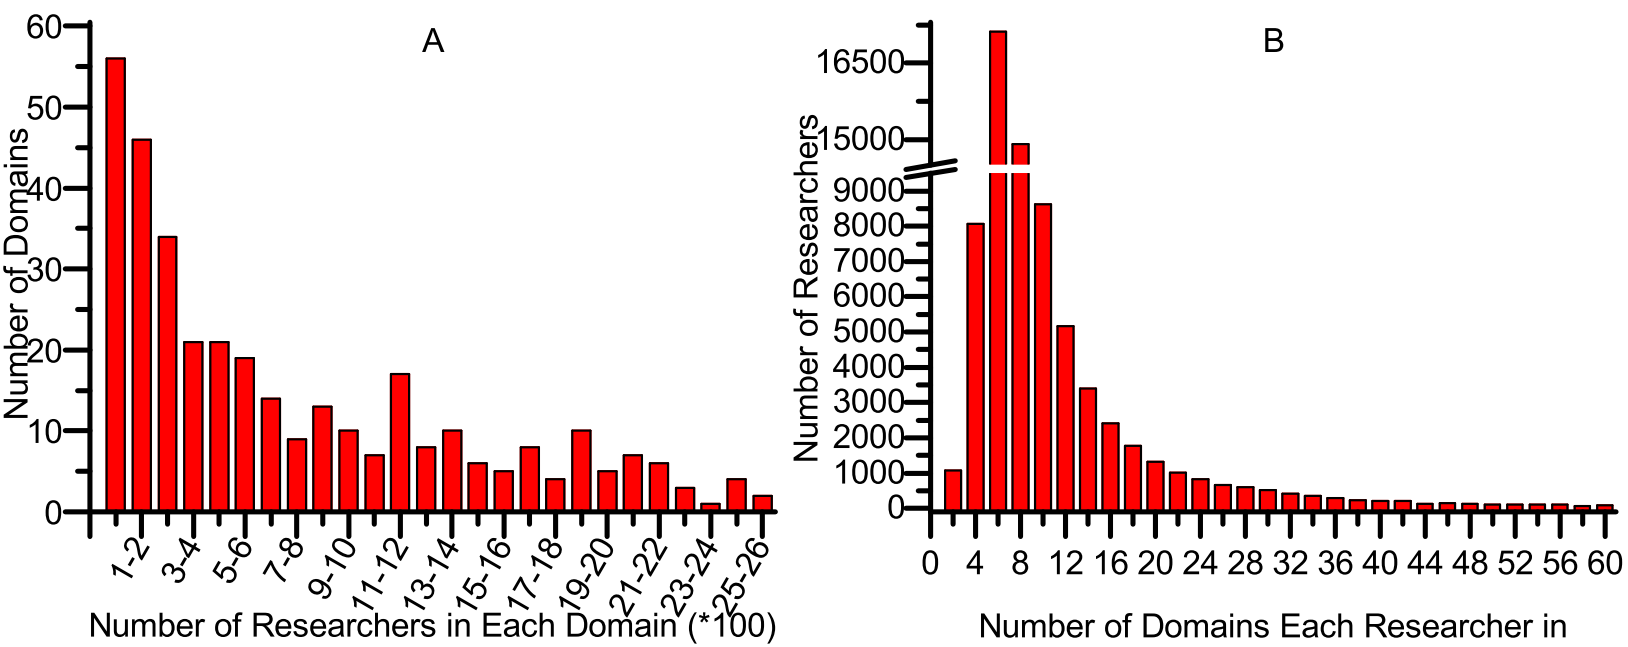


Figure 6
[Click here to download Figure: Fig6.eps](#)

