



MPI pi Monte-Carlo strong scaling (samples = 1e8)

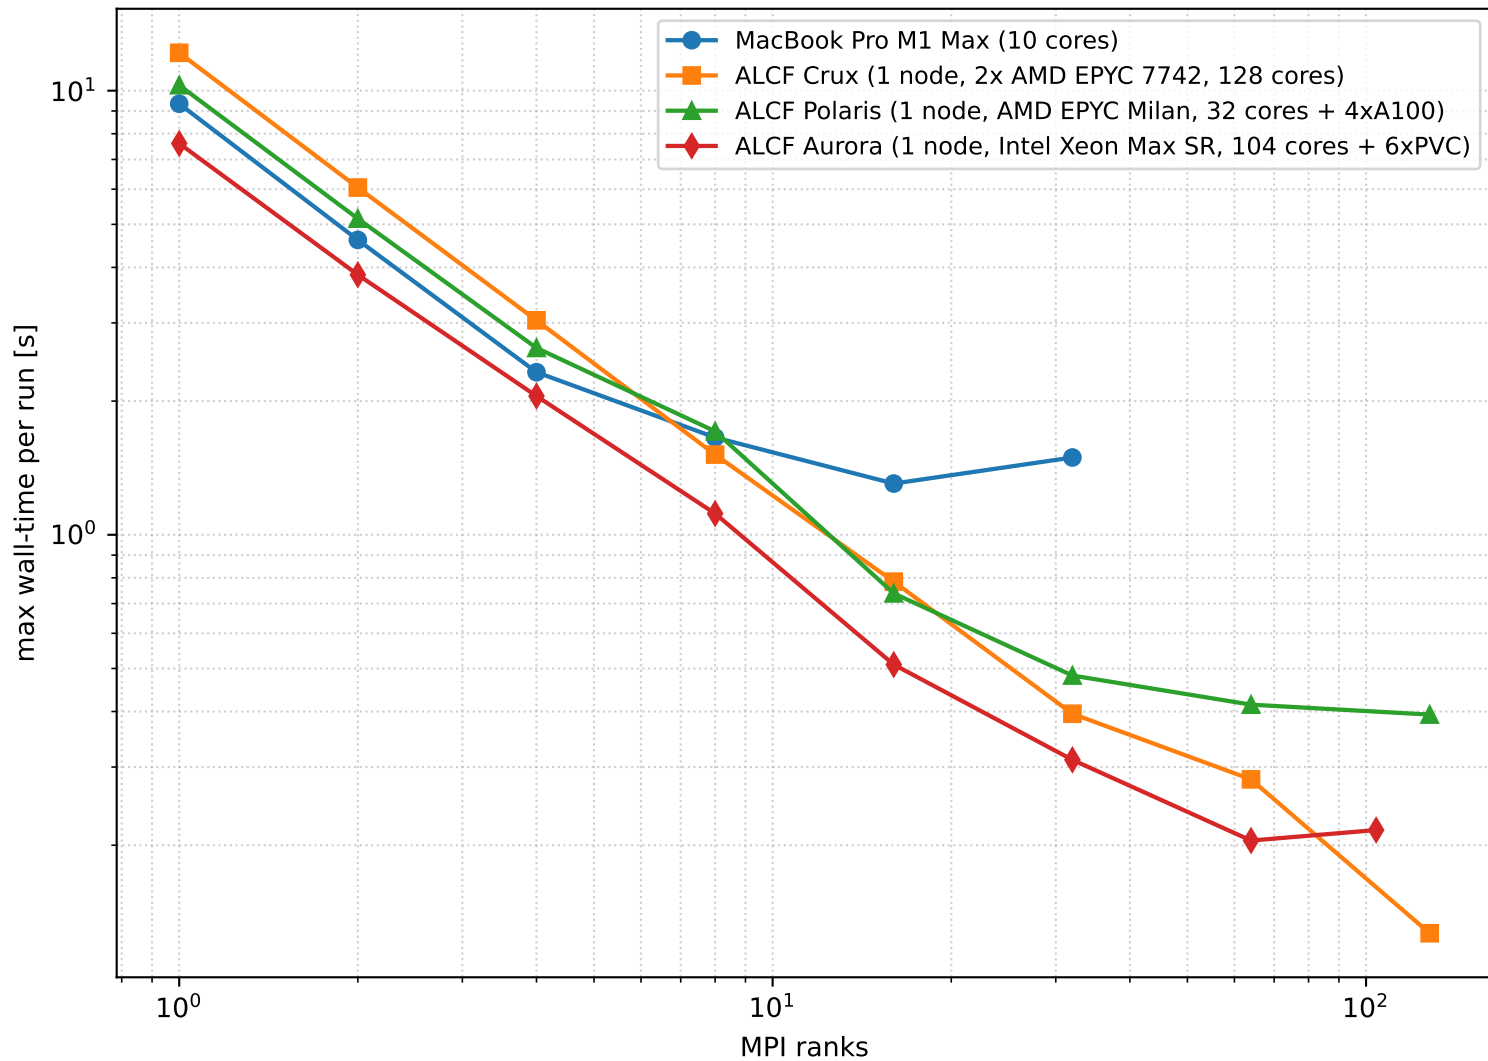

MPI pi Monte-Carlo speedup (samples = 1e8)

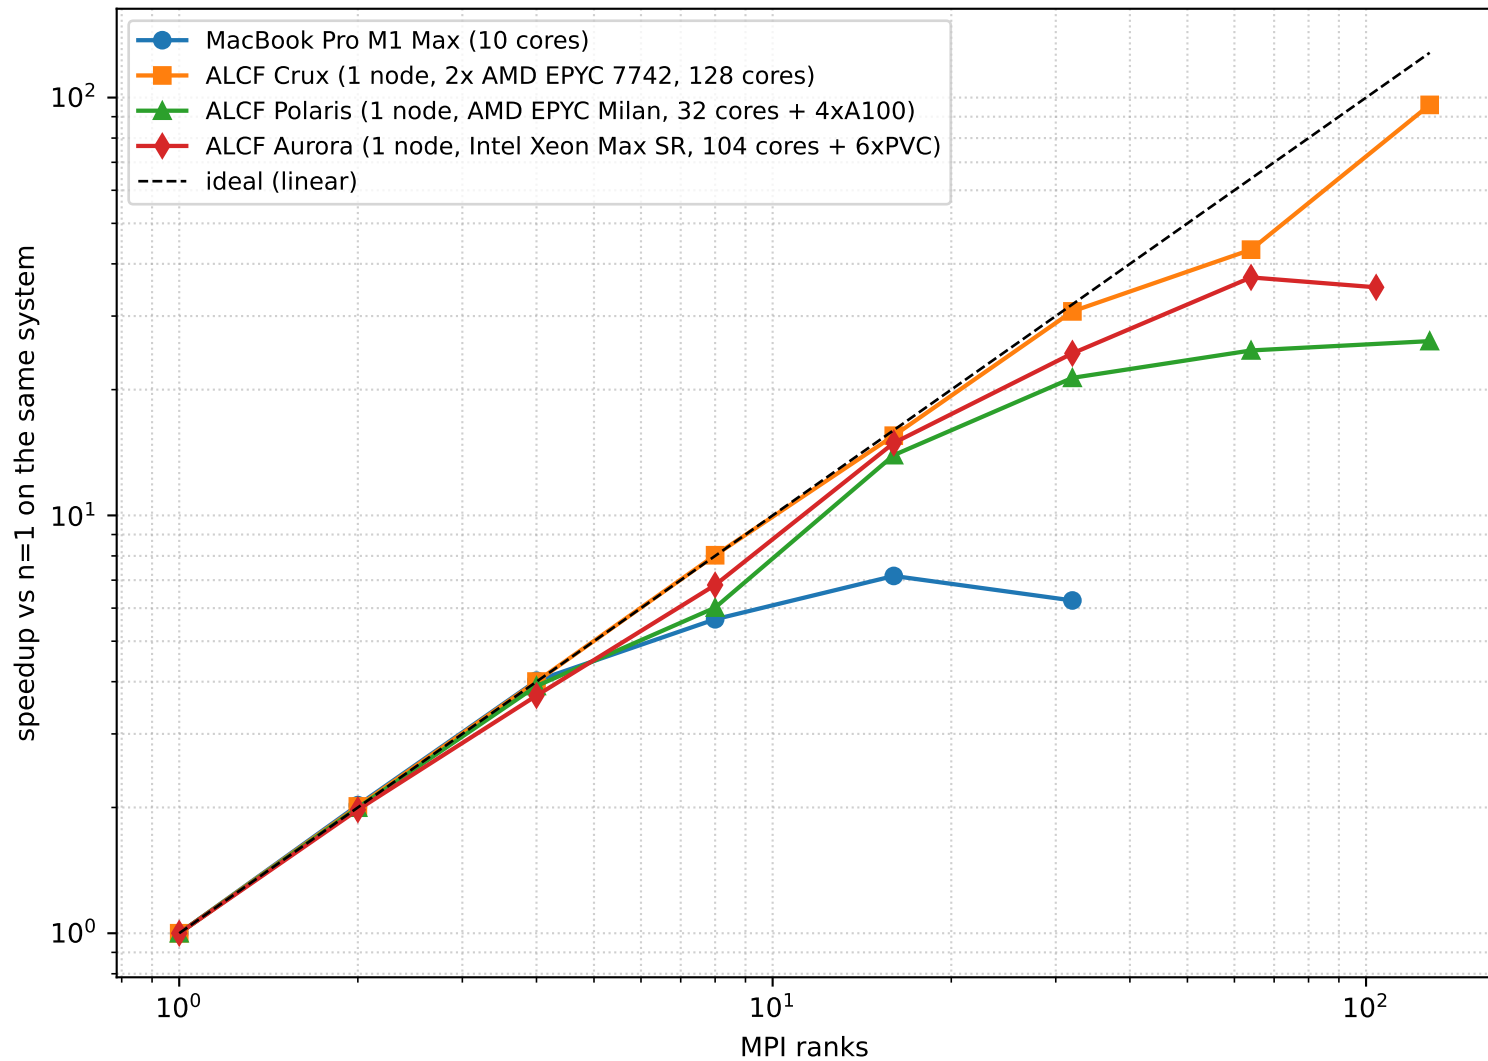

MPI pi (mpi4py) strong-scaling assignment
samples per run = 100,000,000

MacBook Pro M1 Max (10 cores)

procs	time_s	speedup
1	9.3431	1.00
2	4.6124	2.03
4	2.3233	4.02
8	1.6561	5.64
16	1.3042	7.16
32	1.4930	6.26

ALCF Crux (1 node, 2x AMD EPYC 7742, 128 cores)

procs	time_s	speedup
1	12.1703	1.00
2	6.0508	2.01
4	3.0401	4.00
8	1.5157	8.03
16	0.7844	15.52
32	0.3954	30.78
64	0.2814	43.25
128	0.1267	96.05

ALCF Polaris (1 node, AMD EPYC Milan, 32 cores + 4xA100)

procs	time_s	speedup
1	10.2878	1.00
2	5.1501	2.00
4	2.6345	3.91
8	1.7099	6.02
16	0.7380	13.94
32	0.4821	21.34
64	0.4145	24.82
128	0.3937	26.13

ALCF Aurora (1 node, Intel Xeon Max SR, 104 cores + 6xPVC)

procs	time_s	speedup
1	7.6052	1.00
2	3.8503	1.98
4	2.0528	3.70
8	1.1161	6.81
16	0.5102	14.91
32	0.3114	24.42
64	0.2049	37.12
104	0.2164	35.15