


Entropic gateway · N = 2 · T_N = 40960 t.u.

n_steps = 1,638,400,000 · h = 2.5e-05 · B = N n_steps = 3.277e+09 walker-steps · complete seeds: ABF 32/32, ABF+FR 32/32

Instantaneous marginal snapshots (seed-pooled), ABF vs ABF+FR

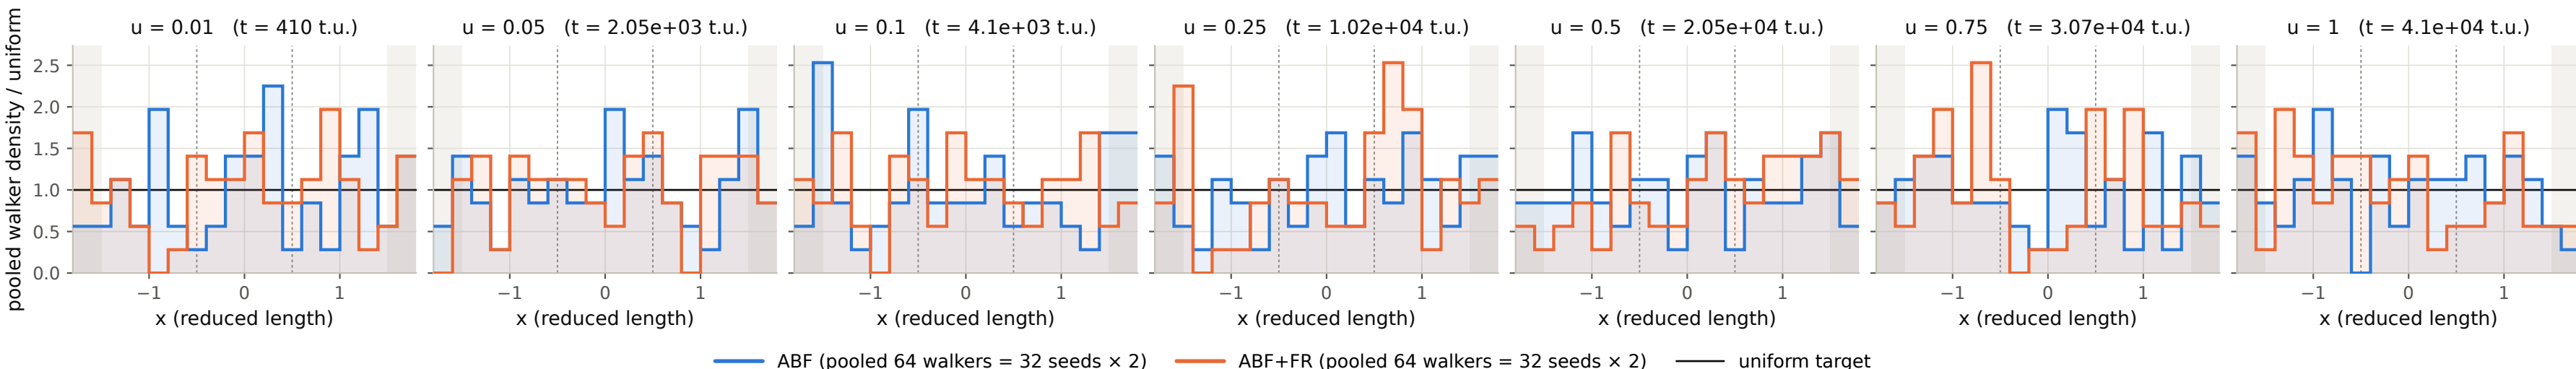

Seed-pooled instantaneous histograms of the walkers at the snapshot u (the saved state), on the 18 coarse bins of the TV metric; density relative to the uniform target (1 = uniform). Not a median: pooled counts.

Small N ($N = 2$, i.e. ≤ 4): each seed contributes only 2 walkers to an instantaneous histogram, so instantaneous marginals are necessarily discrete ($\text{TV}_{\text{inst floor}} E_N[\text{TV}] = 0.892$).

Dashed guides: region boundaries $x = \pm 0.5$ (left well / gate / right well); shaded $|x| > 1.5$: outside the scored eval window.

eqb_plot_config/2 · config_gateway_production.json · 2026-10-10 08:09 UTC