gateway shift_lam1: secondary errors vs N (EM-consistent reference; floor-free companion of e_F′)

Equal total budget per arm per seed: B = N × n_steps = 3.2768e+09 walker-steps at every N (h = 2.5e-05, T_N = B h / N); 32 seeds per (N, method). Secondary read-outs reported by the plan (not the primary endpoints). e_F′,stat = RMS over the eval bins of Gamma − bin-averaged F′_ref, so that e_F′² = e_F′,stat² + floor² exactly: the companion of e_F′ without its deterministic floor (mechanism cell: its own frozen thresholds, the plan's e_F′ tau endpoint, are drawn).

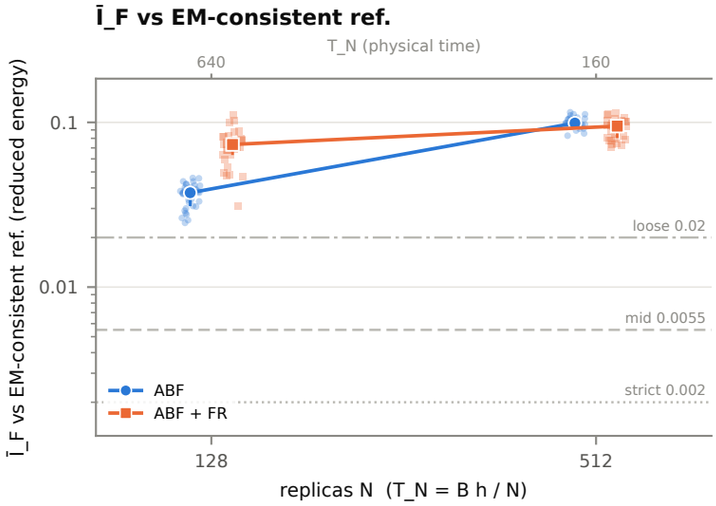

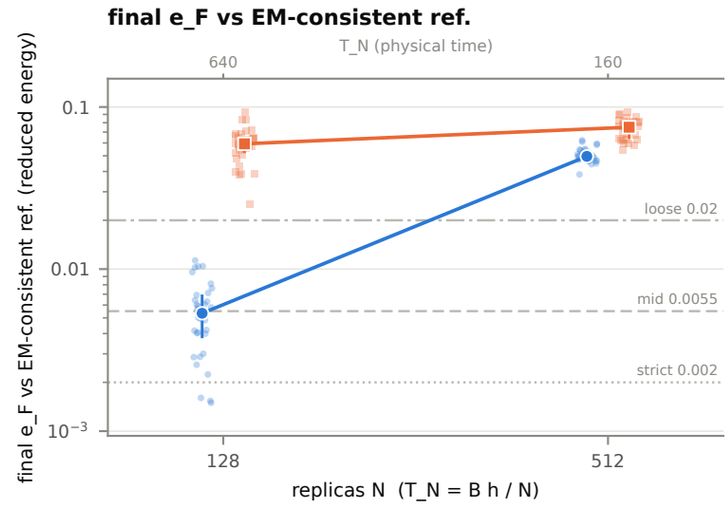

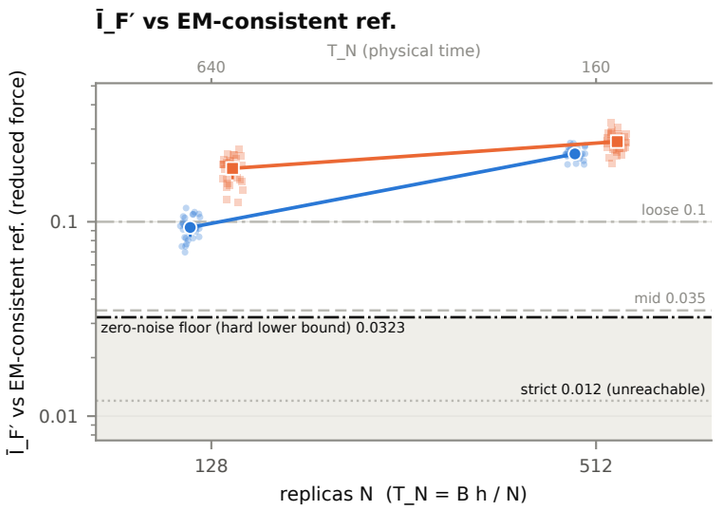

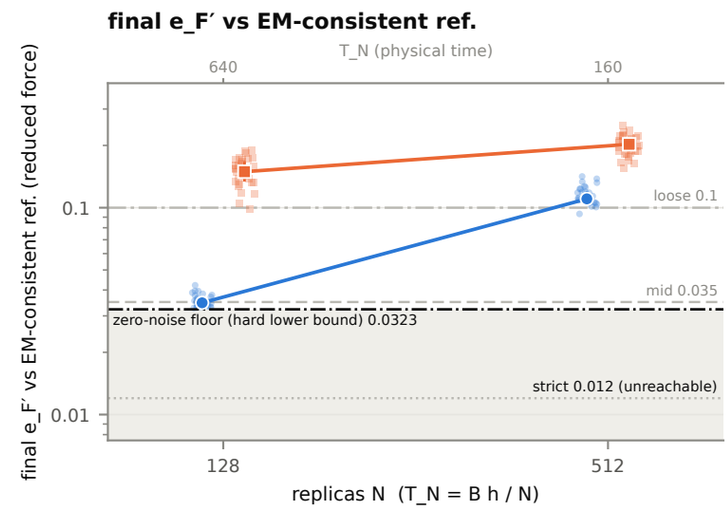

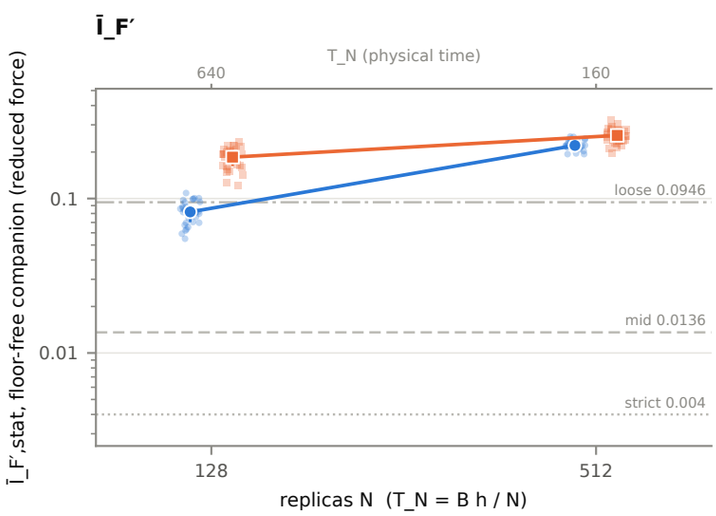

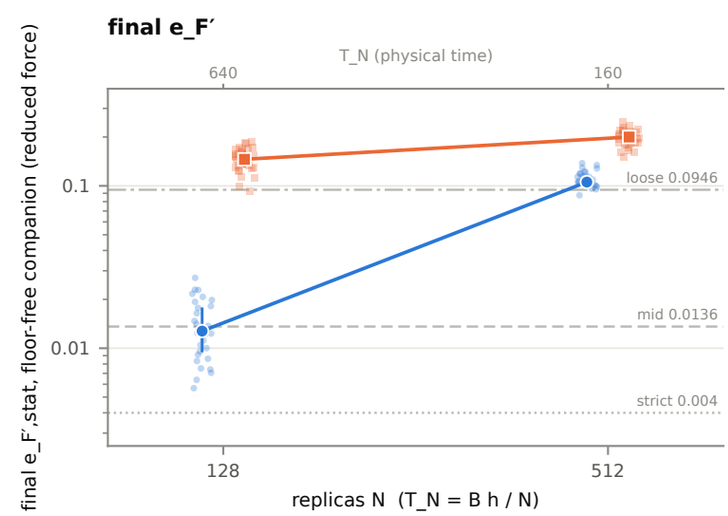

gateway shift_lam1 · S2s_secondary_reference_abs_vs_N · status: all planned (N, seed, method) complete · FR is not defined at N = 1 (ABF only, by design).
Markers: seed median; whiskers: IQR over seeds; faint points: individual seeds. Grey lines: the frozen strict / mid / loose thresholds of e(t) (shown for scale on the integrated errors as well).
Reference floors: Ibar_F_em: EM bias of F vs analytic 1.0e-09 lies below the axis; final_e_F_em: EM bias of F vs analytic 1.0e-09 lies below the axis; Ibar_Fp_em: every estimate lies above the zero-noise floor 0.03227 (e² = stat² + floor²); thresholds below it are unreachable by construction; final_e_Fp_em: every estimate lies above the zero-noise floor 0.03227 (e² = stat² + floor²); thresholds below it are unreachable by construction.
Source results/final_campaign/expA/shift_lam1/analysis/summary.json (generated 2026-10-11T09:25:19Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.