gateway shift_lam1: best allocation at equal budget (primary)

Equal total budget per arm per seed: B = N × n_steps = 3.2768e+09 walker-steps at every N (h = 2.5e-05, T_N = B h / N); 32 seeds per (N, method). Best ABF N (all N) vs best FR N (N ≥ 2) at equal B; the bootstrap re-selects N in every resample.

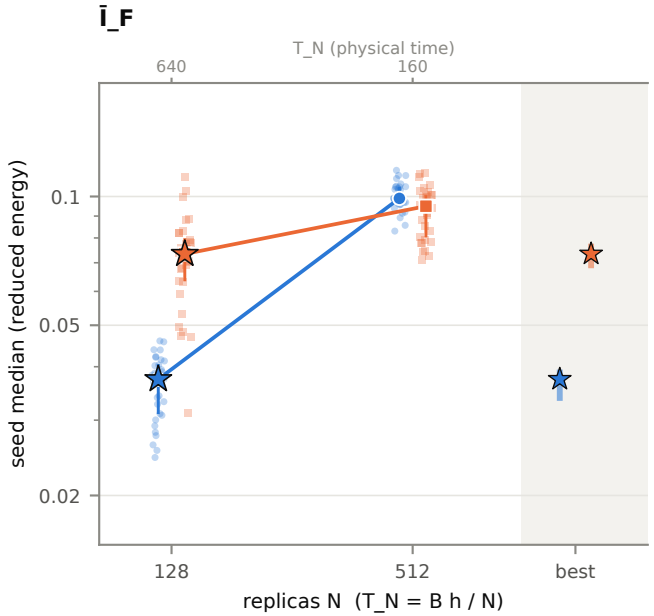


```
ABF best N = 128: 0.0374 [0.0333, 0.0394]
FR  best N = 128: 0.0734 [0.068, 0.0776]
FR - ABF: +0.036 [+0.0303, +0.0426]
relative: +96.3 % [+78.7 %, +126.6 %]
P(best FR < best ABF) = 0
```

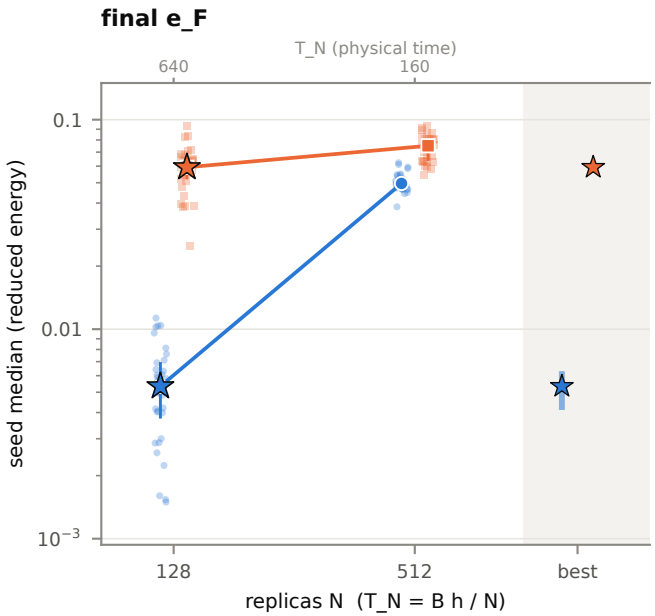


```
ABF best N = 128: 0.00534 [0.00411, 0.0063]
FR  best N = 128: 0.0593 [0.0556, 0.0636]
FR - ABF: +0.0539 [+0.0501, +0.0587]
relative: +1010.4 % [+813.2 %, +1388.2 %]
P(best FR < best ABF) = 0
```

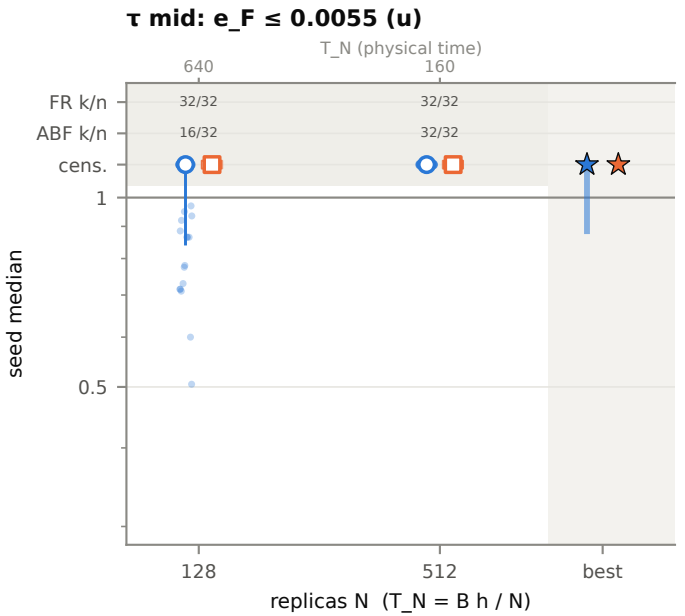


```
ABF best N = all cens.: > 1 [0.875, > 1]
FR  best N = all cens.: > 1 [> 1, > 1]
FR - ABF: -- [+inf, +inf]
relative: -- [+inf, +inf]
P(best FR < best ABF) = 0; undefined 0.58
```

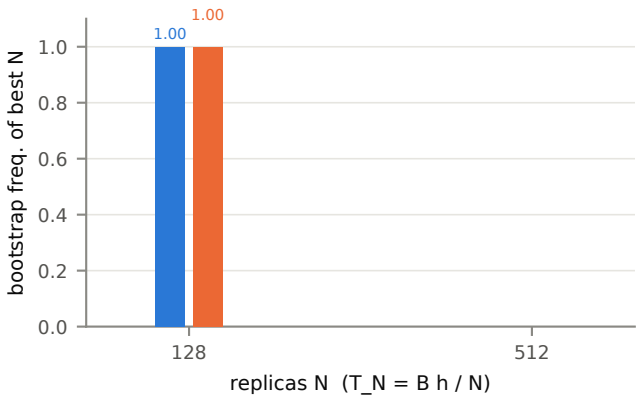

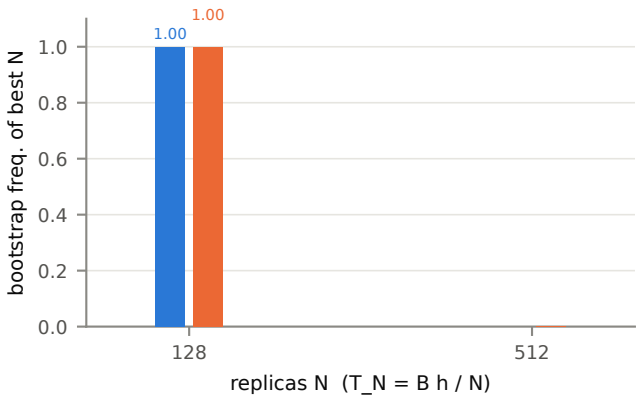

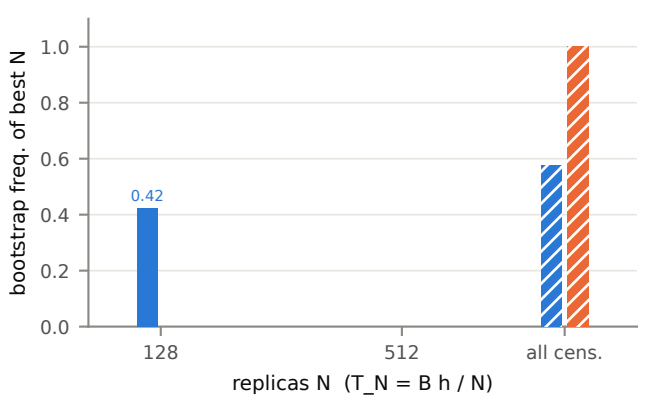

gateway shift_lam1 · S8_best_allocation · status: all planned (N, seed, method) complete · FR is not defined at N = 1 (ABF only, by design).
Bottom: fraction of bootstrap resamples in which each N is best (seeds resampled within each N, one draw shared by both methods; N tied at the minimum share the credit); 'all cens.' = every N censored in that resample (tau only). tau: common budget grid. A 'REDUCED ladder' line names planned N without data: the minimum is then over fewer N. Text: best values with bootstrap 95 % CIs, the CI of best FR - best ABF (absolute and relative) and the fraction of resamples in which the best FR beats the best ABF.
Source results/final_campaign/expA/shift_lam1/analysis/summary.json (generated 2026-10-11T09:25:19Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.