gateway shift_lam1: best allocation at equal budget (secondary)

Equal total budget per arm per seed: B = N × n_steps = 3.2768e+09 walker-steps at every N (h = 2.5e-05, T_N = B h / N); 32 seeds per (N, method). Best ABF N (all N) vs best FR N (N ≥ 2) at equal B; the bootstrap re-selects N in every resample.

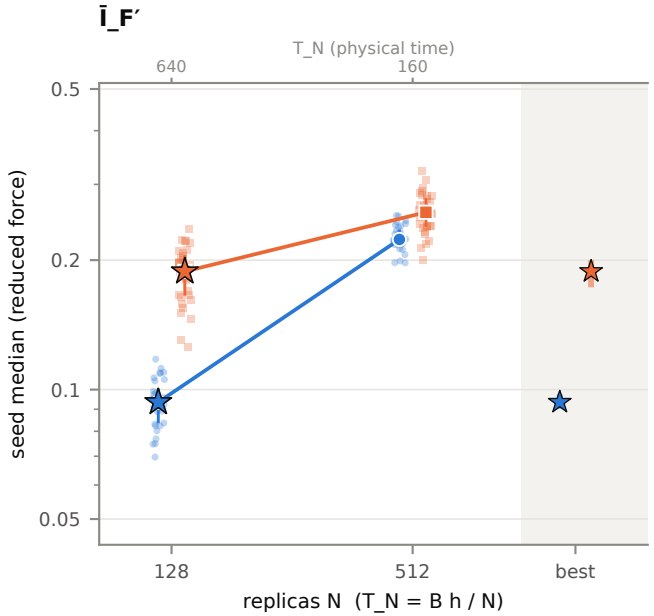

ABF best N = 128: 0.0935 [0.0903, 0.0974]
FR best N = 128: 0.188 [0.173, 0.2]
FR - ABF: +0.0948 [+0.0789, +0.108]
relative: +101.4 % [+82.9 %, +118.2 %]
P(best FR < best ABF) = 0

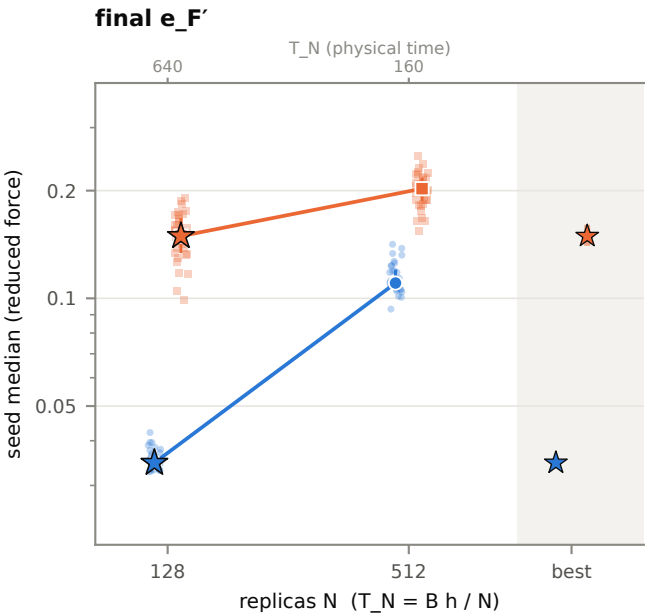

ABF best N = 128: 0.0347 [0.034, 0.0355]
FR best N = 128: 0.149 [0.14, 0.161]
FR - ABF: +0.115 [+0.105, +0.126]
relative: +330.2 % [+299.4 %, +364.8 %]
P(best FR < best ABF) = 0

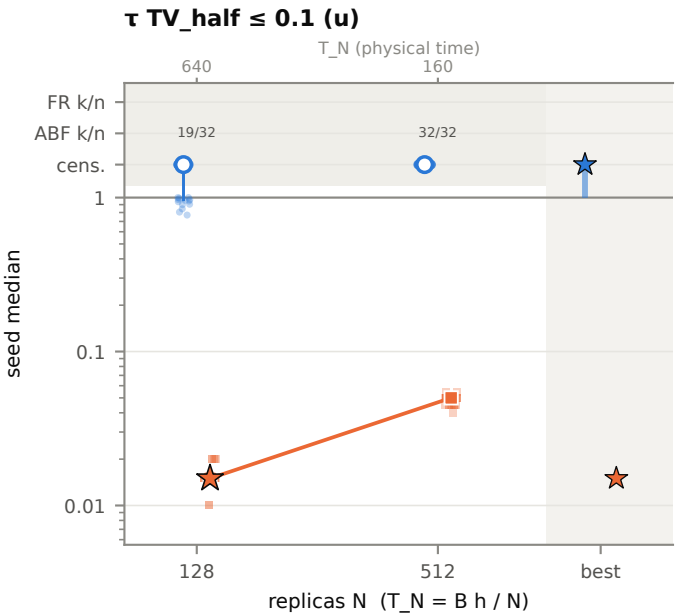

ABF best N = all cens.: > 1 [0.995, > 1]
FR best N = 128: 0.015 [0.015, 0.015]
FR - ABF: -inf [-inf, -0.98]
relative: -- [-98.5 %, -98.5 %]
P(best FR < best ABF) = 1



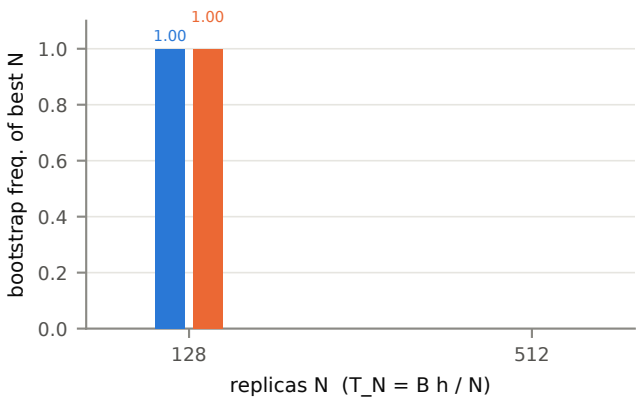

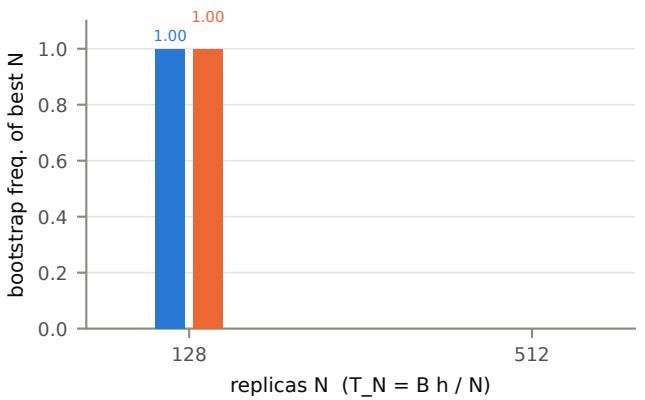

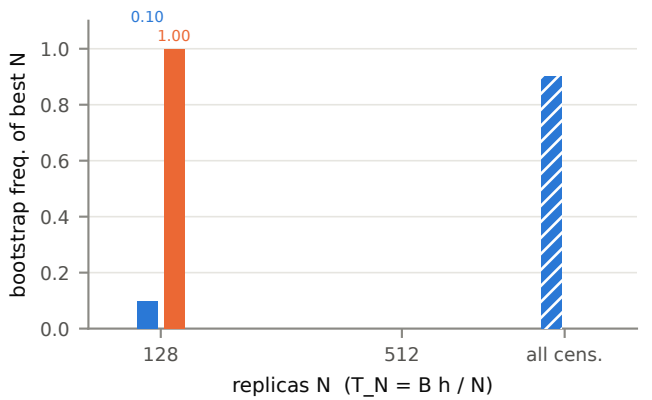

gateway shift_lam1 · S8s_best_allocation_secondary · status: all planned (N, seed, method) complete · FR is not defined at N = 1 (ABF only, by design).
Bottom: fraction of bootstrap resamples in which each N is best (seeds resampled within each N, one draw shared by both methods; N tied at the minimum share the credit); 'all cens.' = every N censored in that resample (tau only). tau: common budget grid. A 'REDUCED ladder' line names planned N without data: the minimum is then over fewer N. Text: best values with bootstrap 95 % CIs, the CI of best FR - best ABF (absolute and relative) and the fraction of resamples in which the best FR beats the best ABF.
Source results/final_campaign/expA/shift_lam1/analysis/summary.json (generated 2026-10-11T09:25:19Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.