gateway shift_lam128: best allocation at equal budget (primary)

Equal total budget per arm per seed: B = N × n_steps = 3.2768e+09 walker-steps at every N (h = 2.5e-05, T_N = B h / N); 32 seeds per (N, method). Best ABF N (all N) vs best FR N (N ≥ 2) at equal B; the bootstrap re-selects N in every resample.

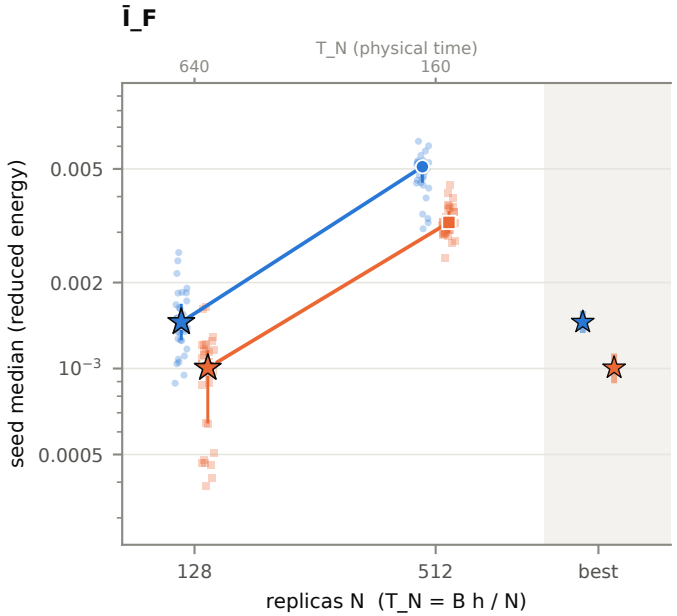


```
ABF best N = 128: 0.00145 [0.00133, 0.00159]
FR  best N = 128: 0.00101 [0.000888, 0.00113]
FR - ABF: -0.000448 [-0.00062, -0.000237]
relative: -30.8 % [-39.6 %, -17.5 %]
P(best FR < best ABF) = 1
```

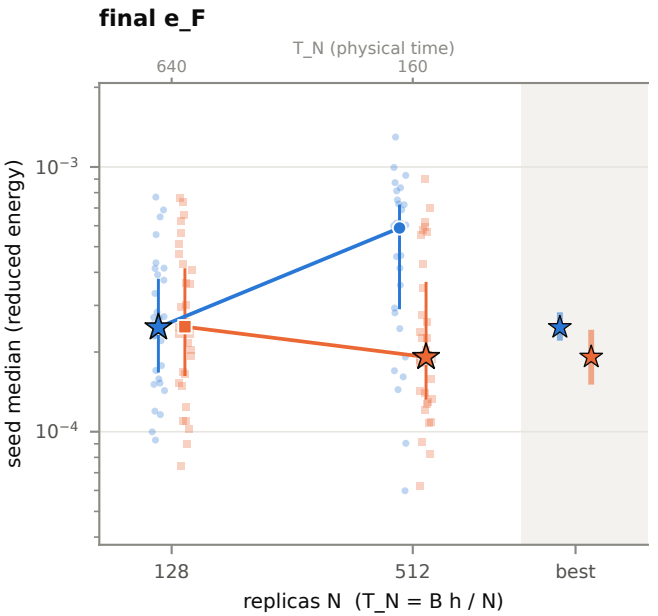


```
ABF best N = 128: 0.000248 [0.000221, 0.000283]
FR  best N = 512: 0.000192 [0.000151, 0.000243]
FR - ABF: -5.63e-05 [-0.000113, +7.56e-06]
relative: -22.7 % [-41.7 %, +3.3 %]
P(best FR < best ABF) = 0.96
```

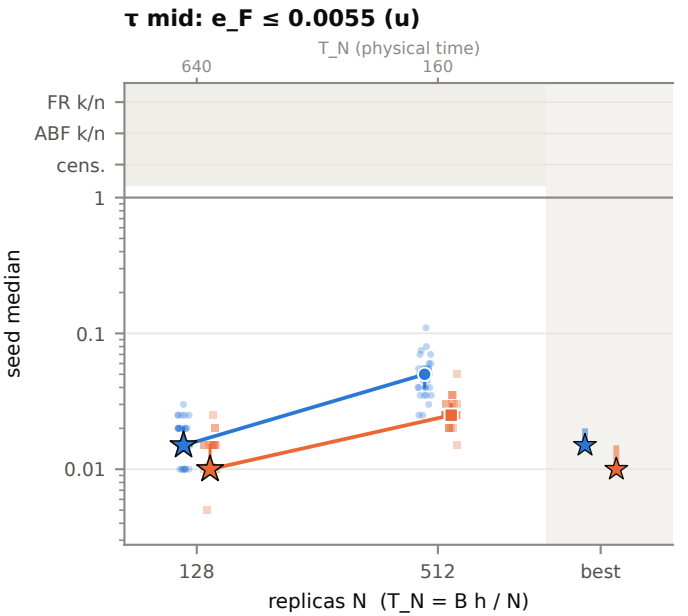


```
ABF best N = 128: 0.015 [0.015, 0.02]
FR  best N = 128: 0.01 [0.01, 0.015]
FR - ABF: -0.005 [-0.01, -0.0025]
relative: -33.3 % [-50.0 %, -14.3 %]
P(best FR < best ABF) = 0.98
```

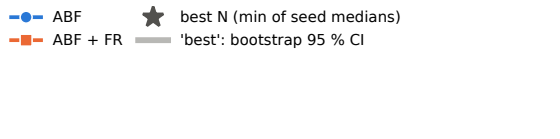

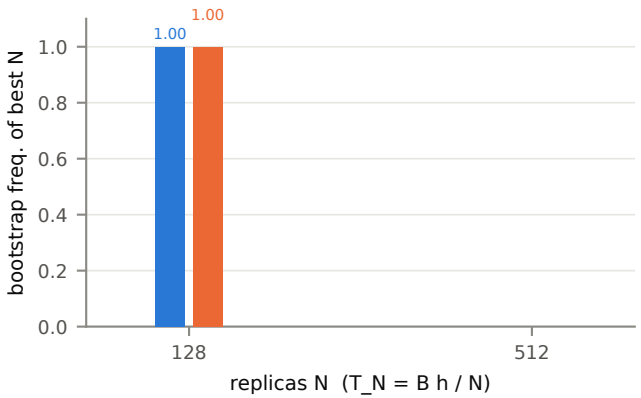

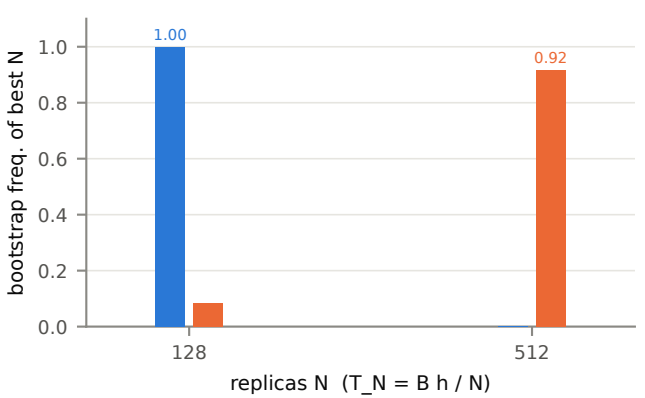

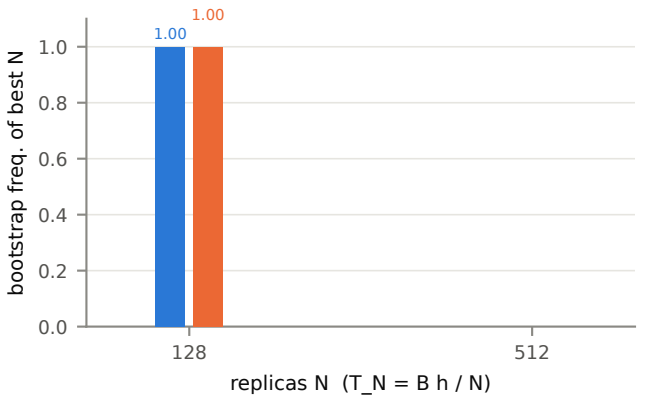

gateway shift_lam128 · S8_best_allocation · status: all planned (N, seed, method) complete · FR is not defined at N = 1 (ABF only, by design).
Bottom: fraction of bootstrap resamples in which each N is best (seeds resampled within each N, one draw shared by both methods; N tied at the minimum share the credit); 'all cens.' = every N censored in that resample (tau only). tau: common budget grid. A 'REDUCED ladder' line names planned N without data: the minimum is then over fewer N. Text: best values with bootstrap 95 % CIs, the CI of best FR - best ABF (absolute and relative) and the fraction of resamples in which the best FR beats the best ABF.
Source results/final_campaign/expA/shift_lam128/analysis/summary.json (generated 2026-10-11T09:25:19Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.