gateway shift_lam128: best allocation at equal budget (secondary)

Equal total budget per arm per seed: B = N × n_steps = 3.2768e+09 walker-steps at every N (h = 2.5e-05, T_N = B h / N); 32 seeds per (N, method). Best ABF N (all N) vs best FR N (N ≥ 2) at equal B; the bootstrap re-selects N in every resample.

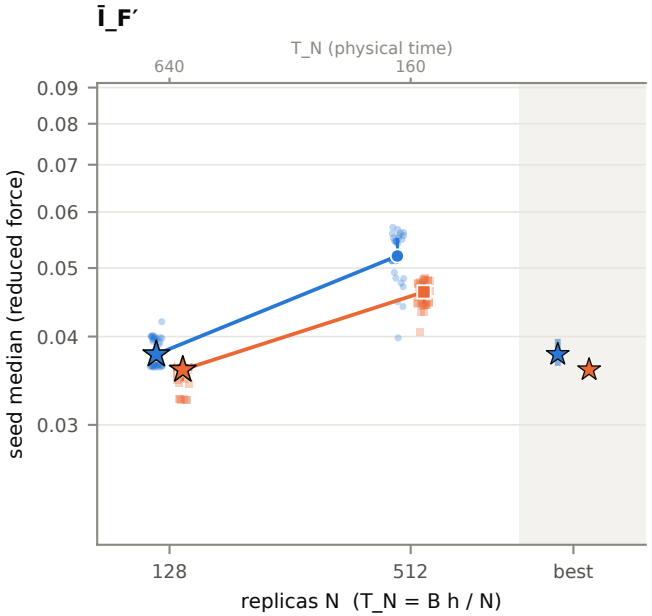


```
ABF best N = 128: 0.0377 [0.0364, 0.0397]
FR  best N = 128: 0.0359 [0.0354, 0.0362]
FR - ABF: -0.00184 [-0.00401, -0.000304]
relative: -4.9 % [-10.1 %, -0.8 %]
P(best FR < best ABF) = 1
```

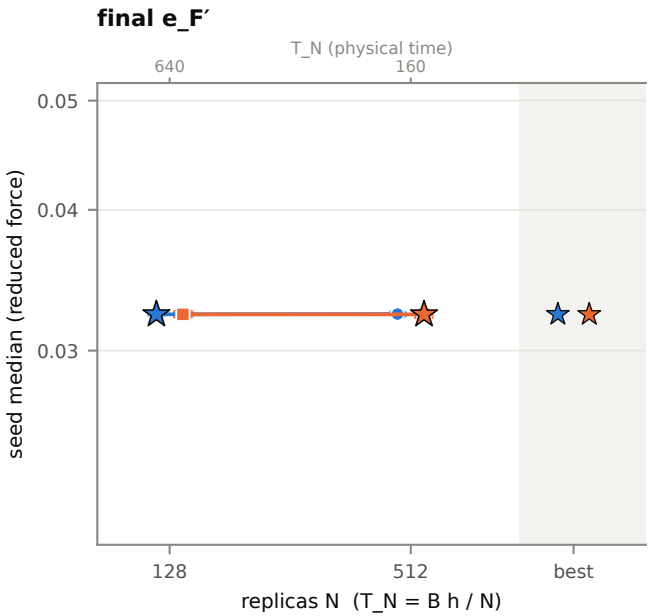


```
ABF best N = 128: 0.0323 [0.0323, 0.0323]
FR  best N = 512: 0.0323 [0.0323, 0.0323]
FR - ABF: -5.06e-06 [-1.68e-05, +5.16e-06]
relative: -0.0 % [-0.1 %, +0.0 %]
P(best FR < best ABF) = 0.832
```

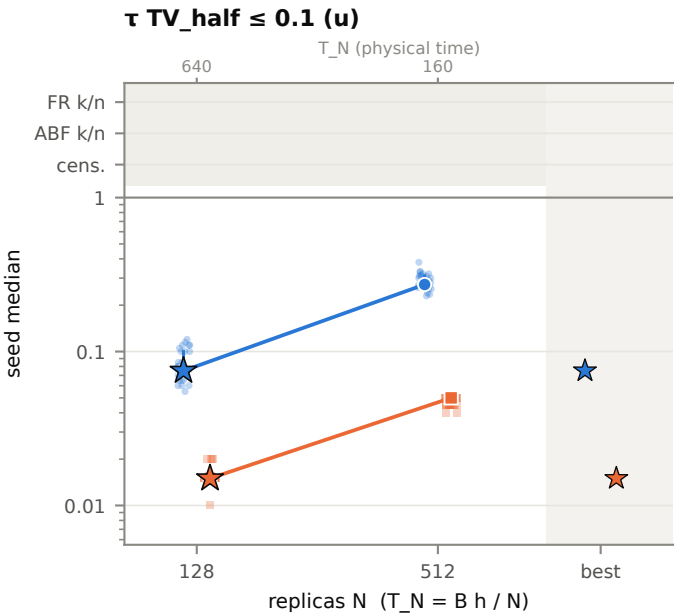


```
ABF best N = 128: 0.075 [0.075, 0.0825]
FR  best N = 128: 0.015 [0.015, 0.015]
FR - ABF: -0.06 [-0.0675, -0.06]
relative: -80.0 % [-81.8 %, -80.0 %]
P(best FR < best ABF) = 1
```

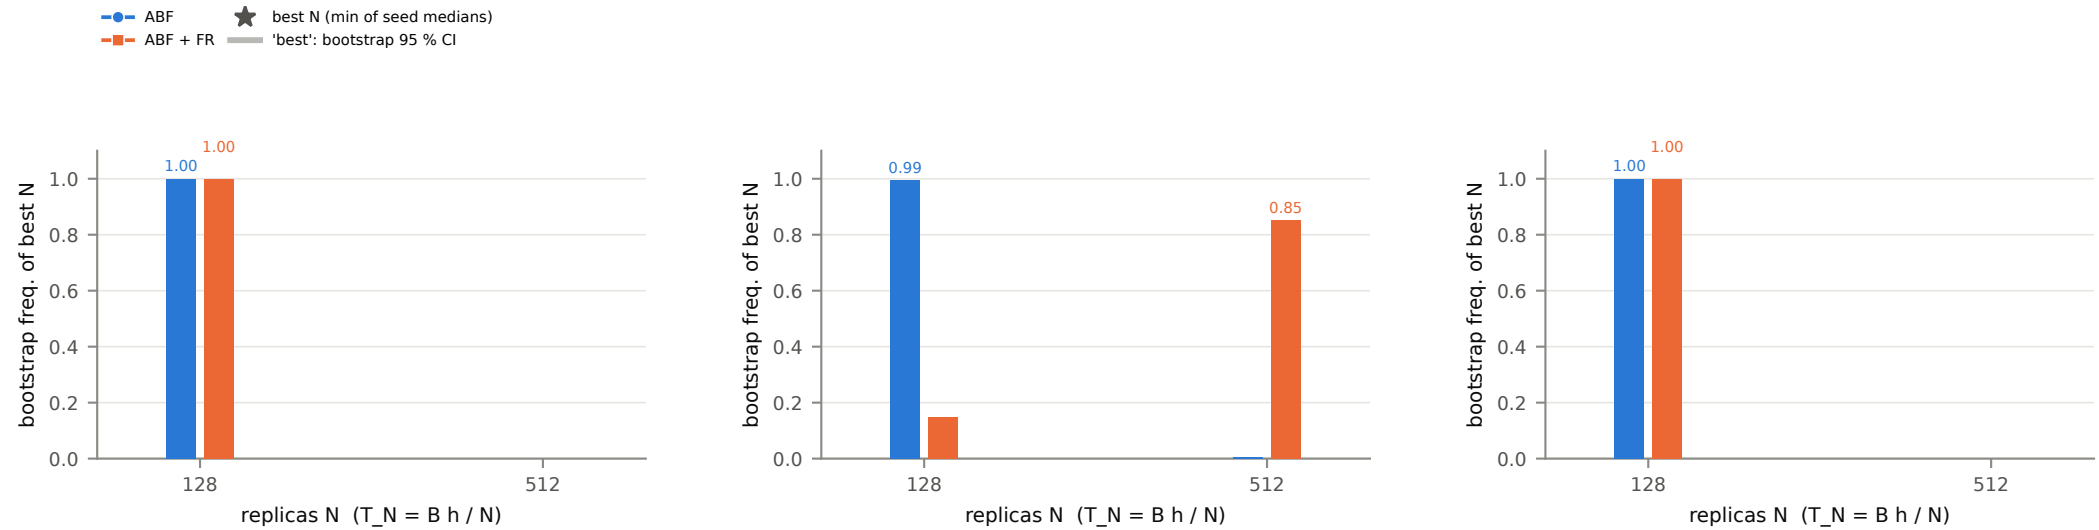

gateway shift_lam128 · S8s_best_allocation_secondary · status: all planned (N, seed, method) complete · FR is not defined at N = 1 (ABF only, by design).
Bottom: fraction of bootstrap resamples in which each N is best (seeds resampled within each N, one draw shared by both methods; N tied at the minimum share the credit); 'all cens.' = every N censored in that resample (tau only). tau: common budget grid. A 'REDUCED ladder' line names planned N without data: the minimum is then over fewer N. Text: best values with bootstrap 95 % CIs, the CI of best FR - best ABF (absolute and relative) and the fraction of resamples in which the best FR beats the best ABF.
Source results/final_campaign/expA/shift_lam128/analysis/summary.json (generated 2026-10-11T09:25:19Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.