## gateway shift_lam16: persistent time to mean-force accuracy, budget fraction

Equal total budget per arm per seed: B = N × n_steps = 3.2768e+09 walker-steps at every N (h = 2.5e-05, T_N = B h / N); 32 seeds per (N, method). τ(ε) = first save after which e_F′,stat ≤ ε at every later save; never met: censored (> T_N, > 1).

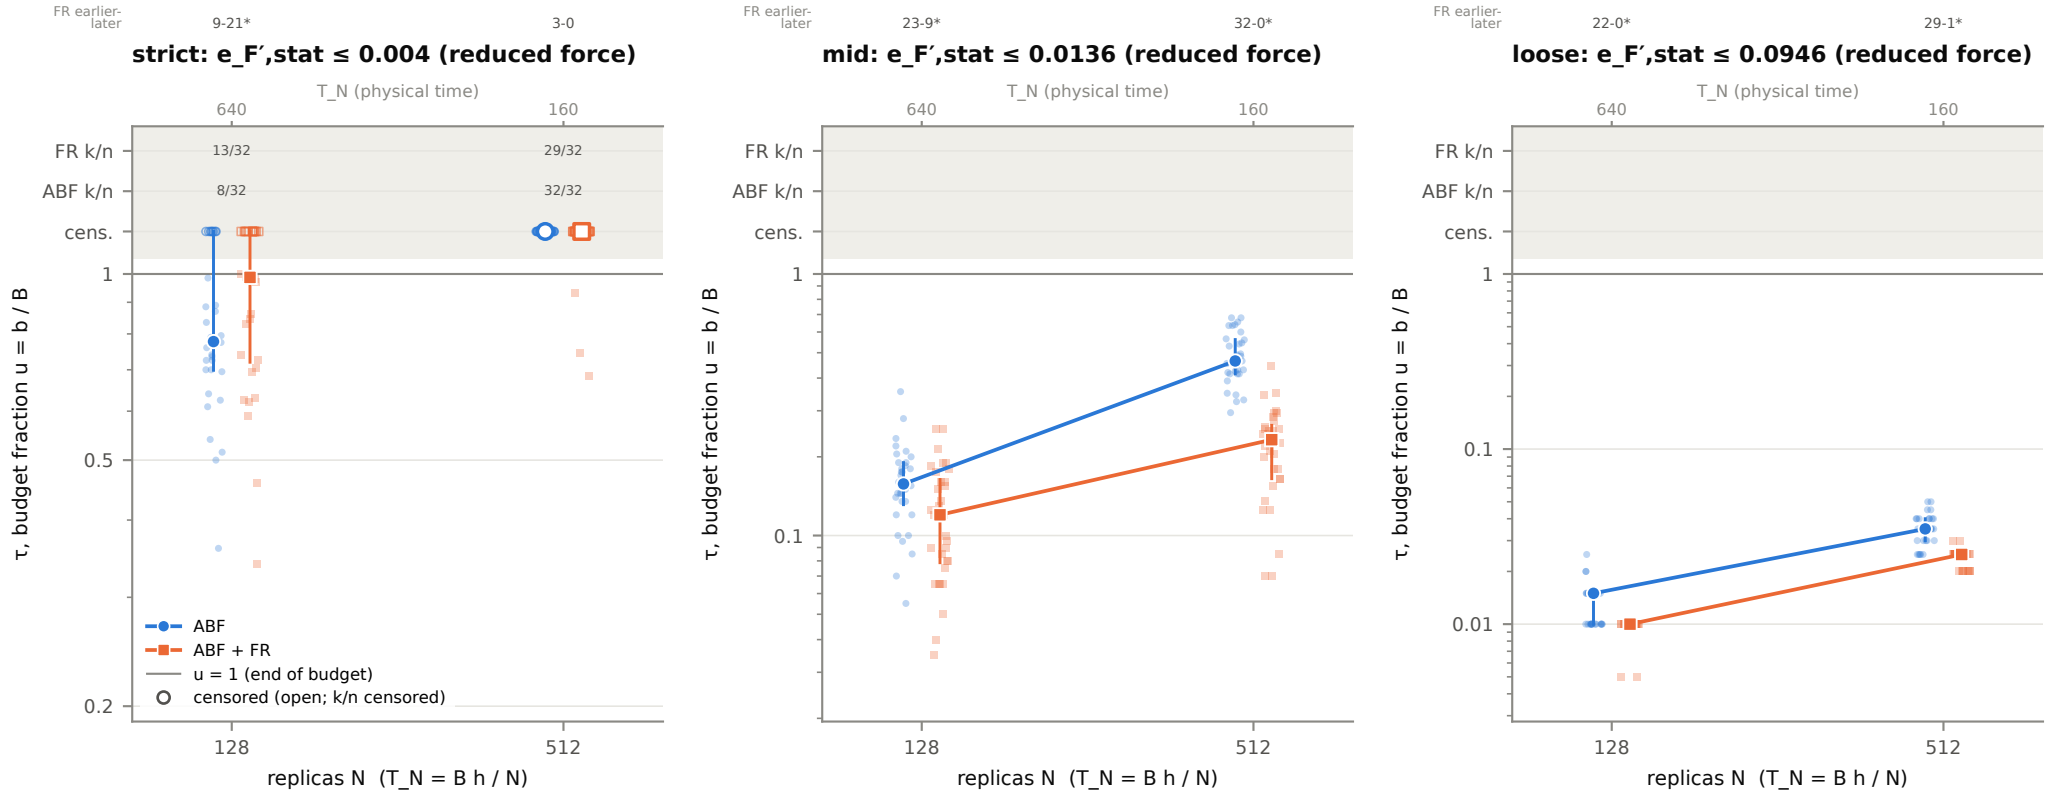


gateway shift_lam16 · S5b_tau_mean_force_budget · status: all planned (N, seed, method) complete · FR is not defined at N = 1 (ABF only, by design).
Markers: seed median (large open marker in the 'cens.' band = median censored); bars: IQR; faint: seeds; censored seeds are open markers in the band, never success at T_N.
Row above each panel: the PAIRED comparison at that N, seeds with FR earlier - FR later than ABF (finite beats censored, both censored = tie; * = exact sign test p < 0.05; medians, G and CIs in summary.json / tables.md). Budget axis: tau on the common budget grid (200 uniform + 24 log-spaced u, identical at every N) so that N are compared at equal resolution.
Source results/final_campaign/expA/shift_lam16/analysis/summary.json (generated 2026-10-11T09:25:19Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.