gateway shift_lam16: best allocation at equal budget (primary)

Equal total budget per arm per seed: B = N × n_steps = 3.2768e+09 walker-steps at every N (h = 2.5e-05, T_N = B h / N); 32 seeds per (N, method). Best ABF N (all N) vs best FR N (N ≥ 2) at equal B; the bootstrap re-selects N in every resample.

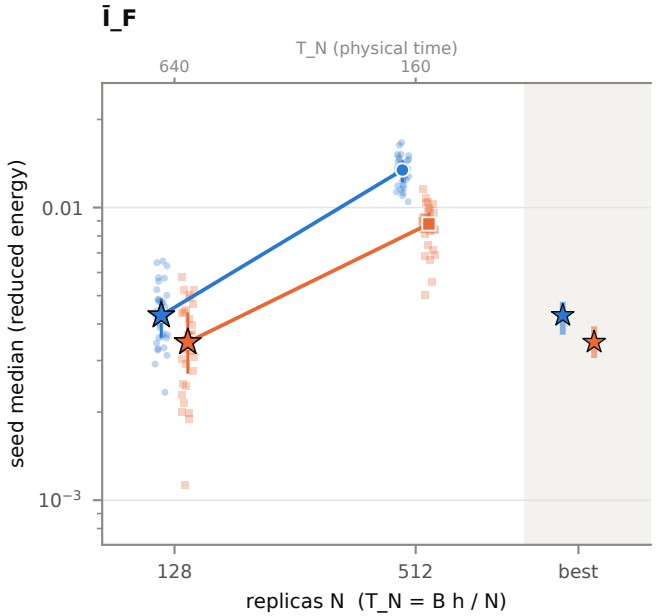


```
ABF best N = 128: 0.00428 [0.00368, 0.00476]
FR  best N = 128: 0.00347 [0.00306, 0.00393]
FR - ABF: -0.000813 [-0.00148, -6.05e-05]
relative: -19.0 % [-31.7 %, -1.6 %]
P(best FR < best ABF) = 0.985
```

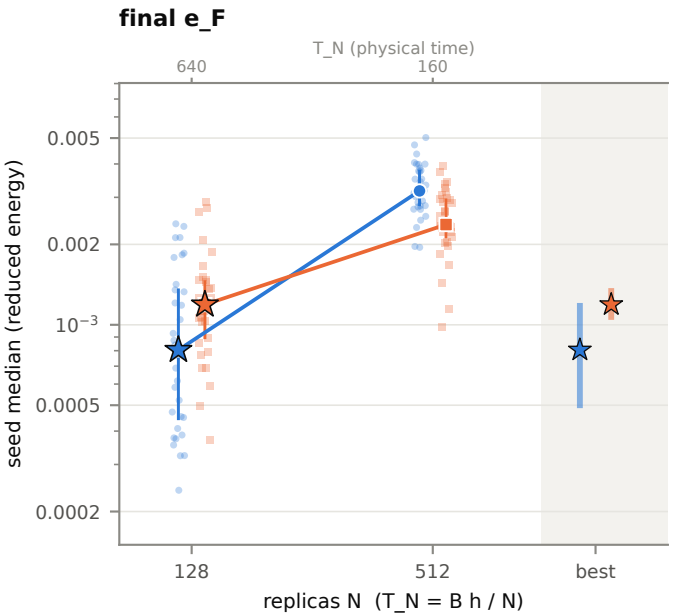


```
ABF best N = 128: 0.000805 [0.000488, 0.00121]
FR  best N = 128: 0.00119 [0.00104, 0.00137]
FR - ABF: +0.000385 [-8.24e-05, +0.000757]
relative: +47.9 % [-6.7 %, +145.2 %]
P(best FR < best ABF) = 0.0501
```

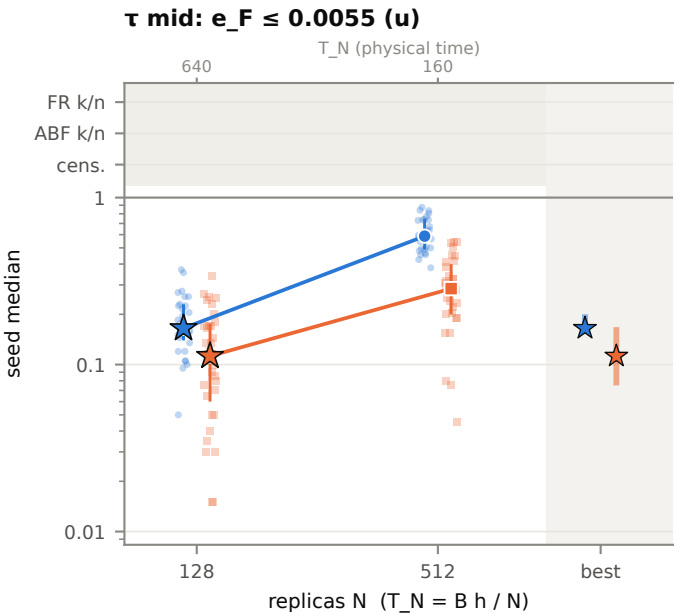


```
ABF best N = 128: 0.165 [0.152, 0.2]
FR  best N = 128: 0.112 [0.075, 0.168]
FR - ABF: -0.0525 [-0.102, +0.0075]
relative: -31.8 % [-56.2 %, +4.7 %]
P(best FR < best ABF) = 0.955
```

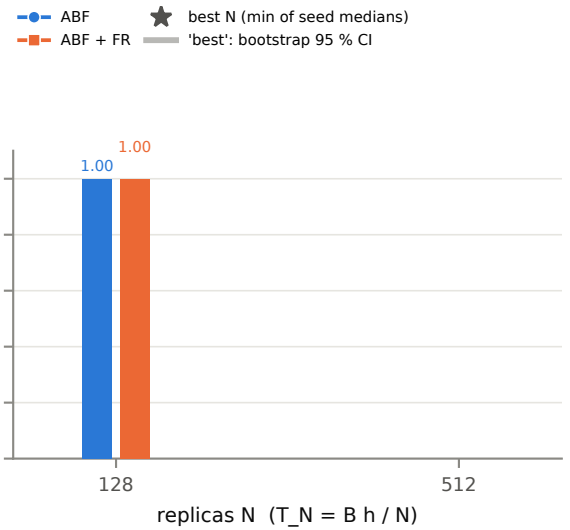

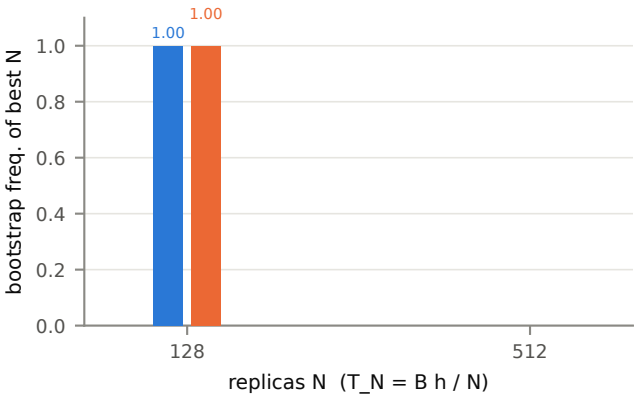

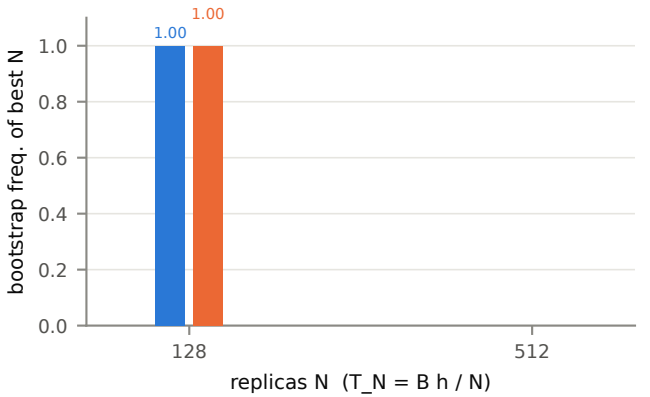

gateway shift_lam16 · S8_best_allocation · status: all planned (N, seed, method) complete · FR is not defined at N = 1 (ABF only, by design).
Bottom: fraction of bootstrap resamples in which each N is best (seeds resampled within each N, one draw shared by both methods; N tied at the minimum share the credit); 'all cens.' = every N censored in that resample (tau only). tau: common budget grid. A 'REDUCED ladder' line names planned N without data: the minimum is then over fewer N. Text: best values with bootstrap 95 % CIs, the CI of best FR - best ABF (absolute and relative) and the fraction of resamples in which the best FR beats the best ABF.
Source results/final_campaign/expA/shift_lam16/analysis/summary.json (generated 2026-10-11T09:25:19Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.