gateway shift_lam16: best allocation at equal budget (secondary)

Equal total budget per arm per seed: B = N × n_steps = 3.2768e+09 walker-steps at every N (h = 2.5e-05, T_N = B h / N); 32 seeds per (N, method). Best ABF N (all N) vs best FR N (N ≥ 2) at equal B; the bootstrap re-selects N in every resample.

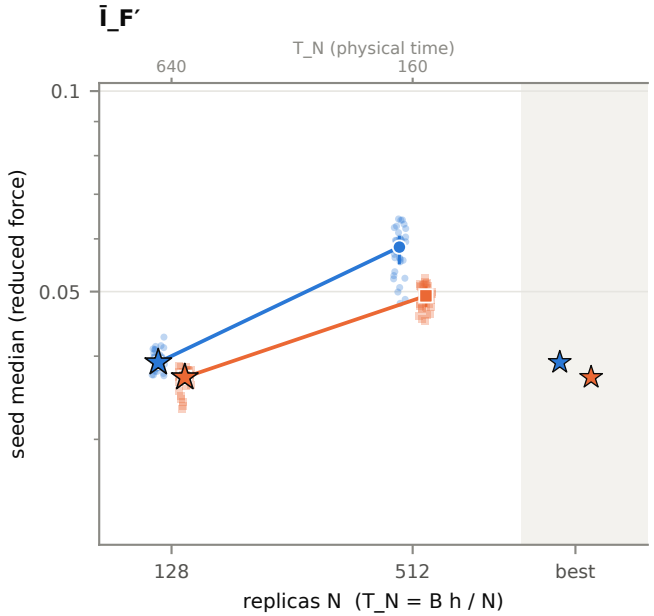


```
ABF best N = 128: 0.0391 [0.0387, 0.0399]
FR  best N = 128: 0.0372 [0.0368, 0.0377]
FR - ABF: -0.00197 [-0.00291, -0.0013]
relative: -5.0 % [-7.3 %, -3.4 %]
P(best FR < best ABF) = 1
```

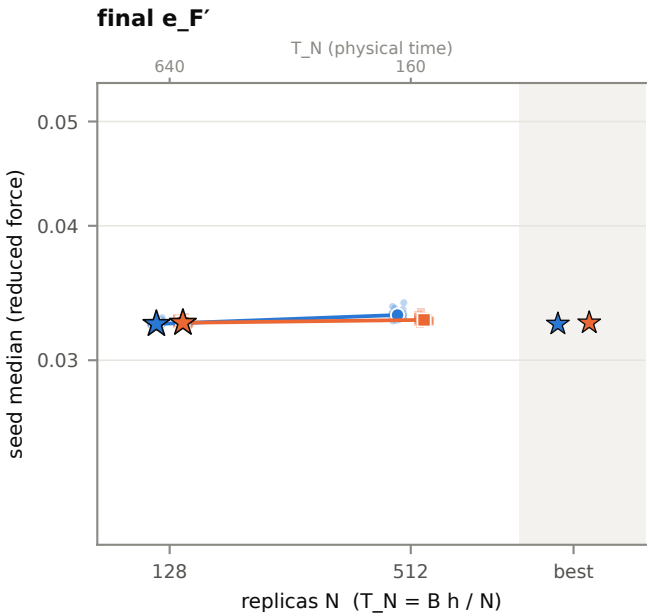


```
ABF best N = 128: 0.0324 [0.0324, 0.0325]
FR  best N = 128: 0.0325 [0.0325, 0.0325]
FR - ABF: +8.24e-05 [+2.59e-05, +0.000125]
relative: +0.3 % [+0.1 %, +0.4 %]
P(best FR < best ABF) = 0.0033
```

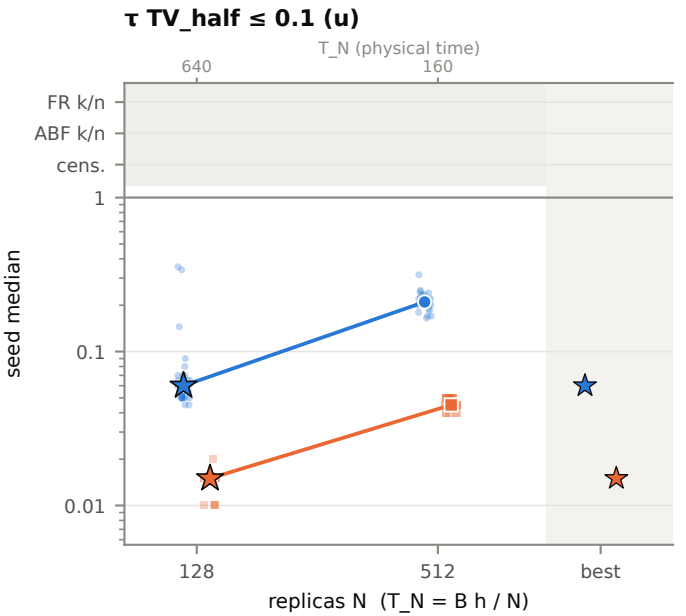


```
ABF best N = 128: 0.06 [0.055, 0.0625]
FR  best N = 128: 0.015 [0.015, 0.015]
FR - ABF: -0.045 [-0.0475, -0.04]
relative: -75.0 % [-76.0 %, -72.7 %]
P(best FR < best ABF) = 1
```

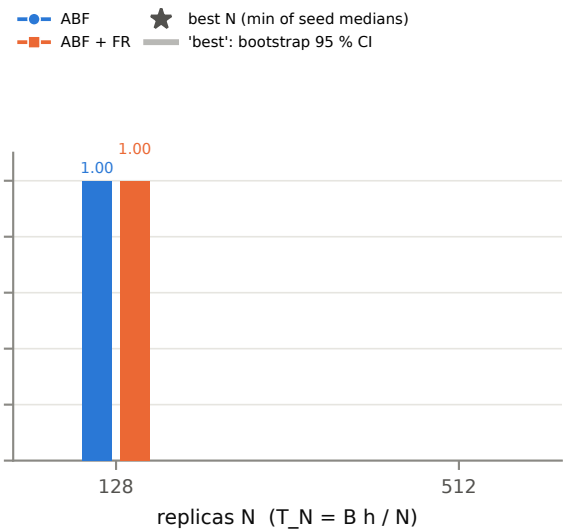

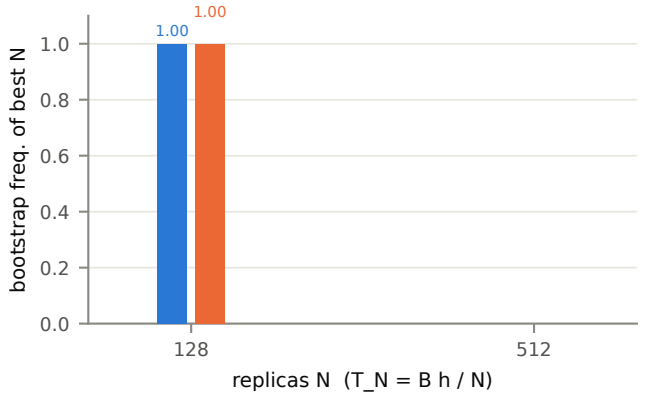

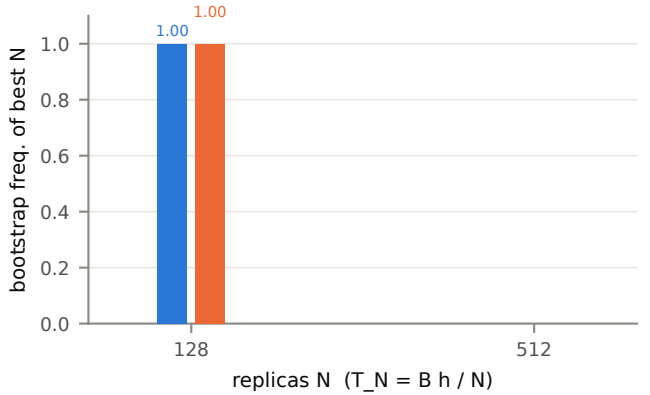

gateway shift_lam16 · S8s_best_allocation_secondary · status: all planned (N, seed, method) complete · FR is not defined at N = 1 (ABF only, by design).
Bottom: fraction of bootstrap resamples in which each N is best (seeds resampled within each N, one draw shared by both methods; N tied at the minimum share the credit); 'all cens.' = every N censored in that resample (tau only). tau: common budget grid. A 'REDUCED ladder' line names planned N without data: the minimum is then over fewer N. Text: best values with bootstrap 95 % CIs, the CI of best FR - best ABF (absolute and relative) and the fraction of resamples in which the best FR beats the best ABF.
Source results/final_campaign/expA/shift_lam16/analysis/summary.json (generated 2026-10-11T09:25:19Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.