



Walker traces with y (D4): ℓ : $\lambda = 0.1$ (transverse mobility / 10), $N = 2048$
 First four traced walker ids; FR lines break where an id is reborn (copy of another walker); samples every 0.1 t.u. to $t = 40$, sparser later.
 EXPLORATORY: this quantity is not preregistered (SCIENTIFIC_PLAN sections 4 and 6)


(a) ABF, seed 8100: $x(t)$

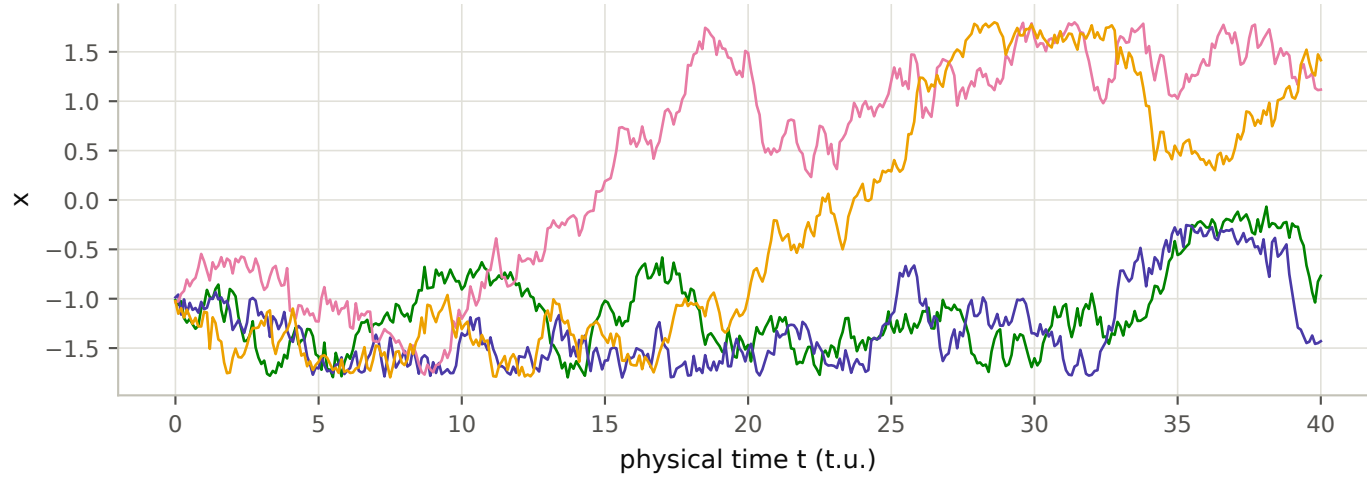


(b) ABF+FR, seed 8100: $x(t)$

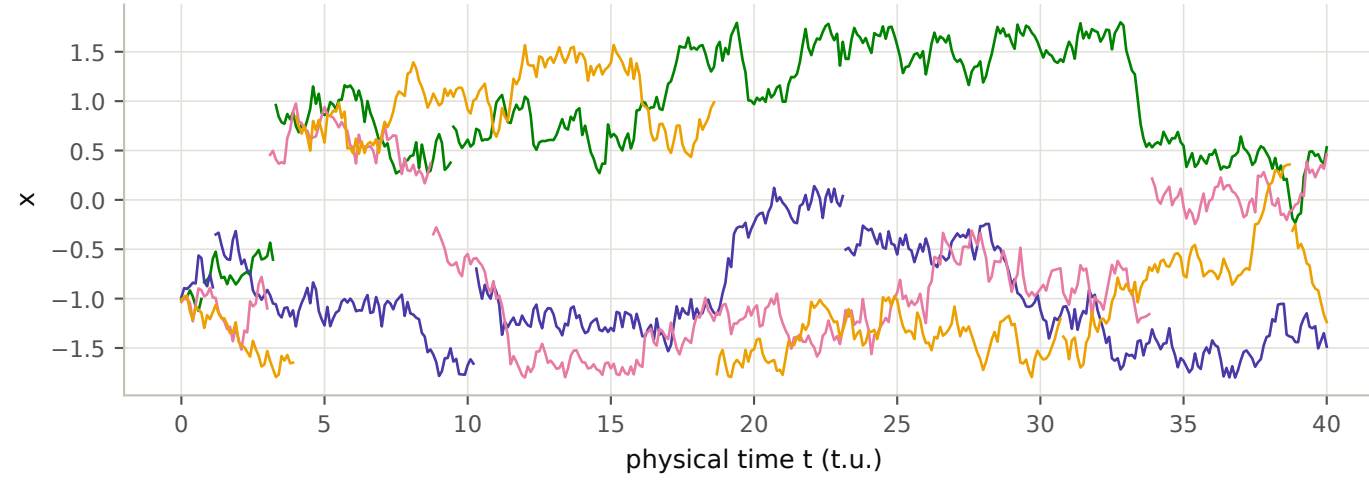


(c) ABF: $y(t)$

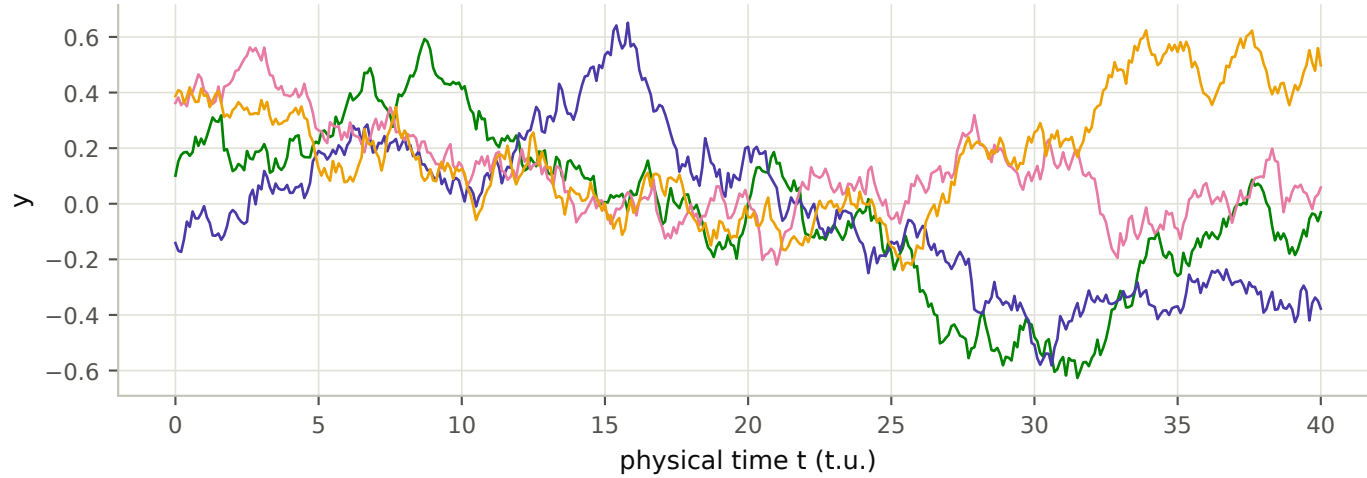


(d) ABF+FR: $y(t)$

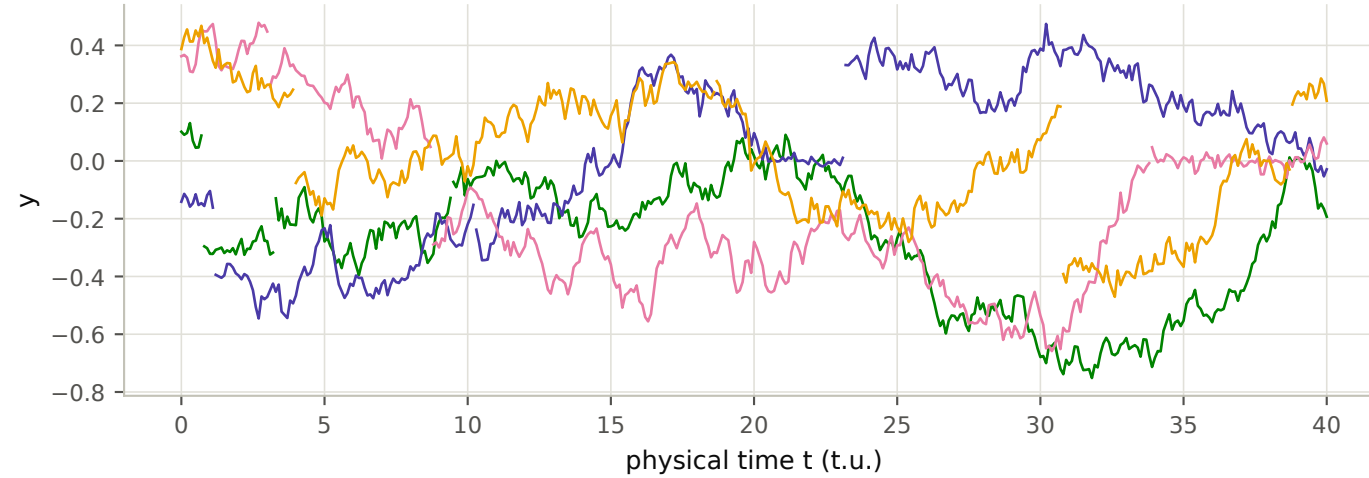

(e) ABF: standardised y (dotted: ± 2)

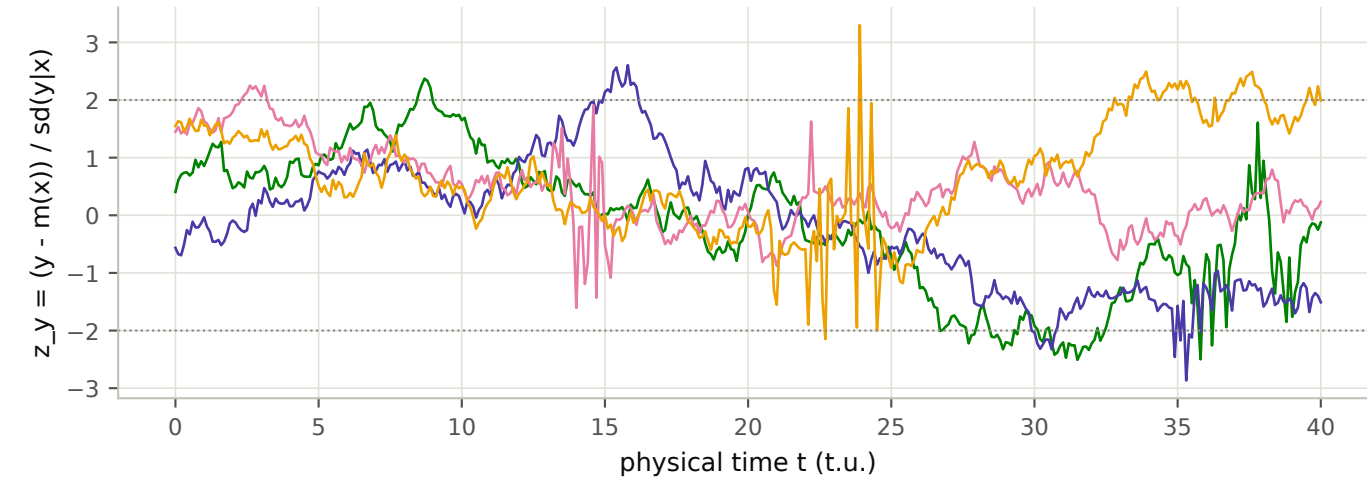

(f) ABF+FR: standardised y (dotted: ± 2)

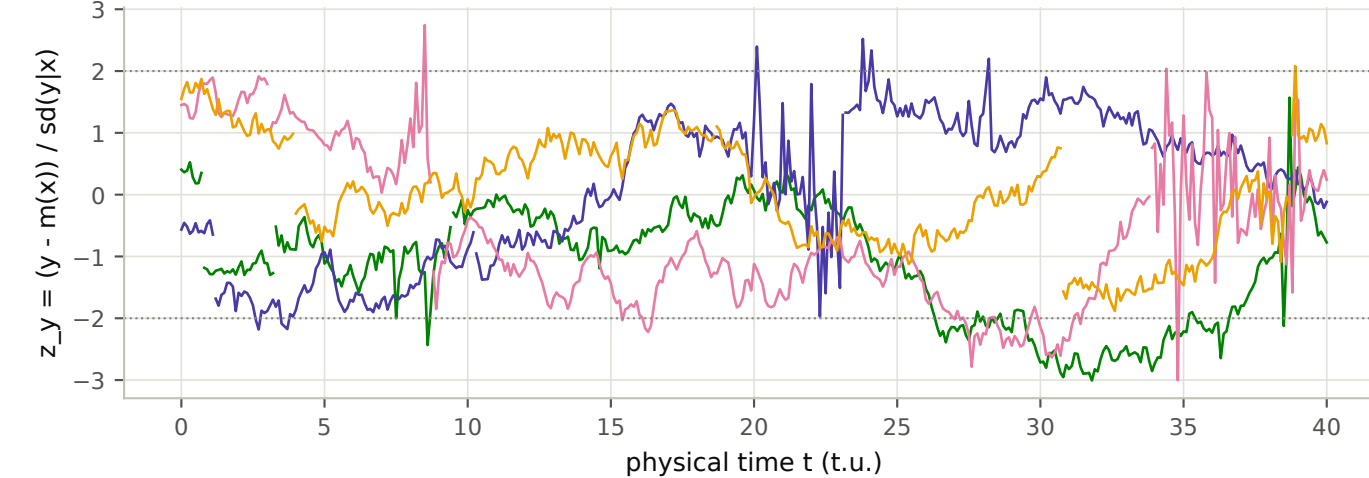

— traced walker id 0 — traced walker id 1 — traced walker id 2 — traced walker id 3