


S5b Experiment II: D2 class-wise mean-force bias vs lambda. Columns 1-2: the plan's readout (sections 4 and 7: B_c and its paired change from lambda = 1); columns 3-4: EXPLORATORY, analysis-defined
 $B_c^2 = \sum_j n_{cj} [(m_{cj} - \langle F^* \rangle_j)^2 - V_{cj}] / \sum_j n_{cj}$ over the eval bins (seed-cluster debiased). Columns 3-4 (not in the plan): B_ABF[c] = ABF's debiased error weighted by the FR class's deposit counts (same bins); column 4 = [B_c(FR) - B_ABF[c]_cell - [same]_lam1.
 Paired over the common seeds; 0 at lam1 by construction. Per-class p values are unadjusted (Holm within each readout family in mech_synthesis.json).
 EXPLORATORY: columns 3-4 (matched-position excess) are analysis-defined, not preregistered (SCIENTIFIC_PLAN sections 4 and 6)

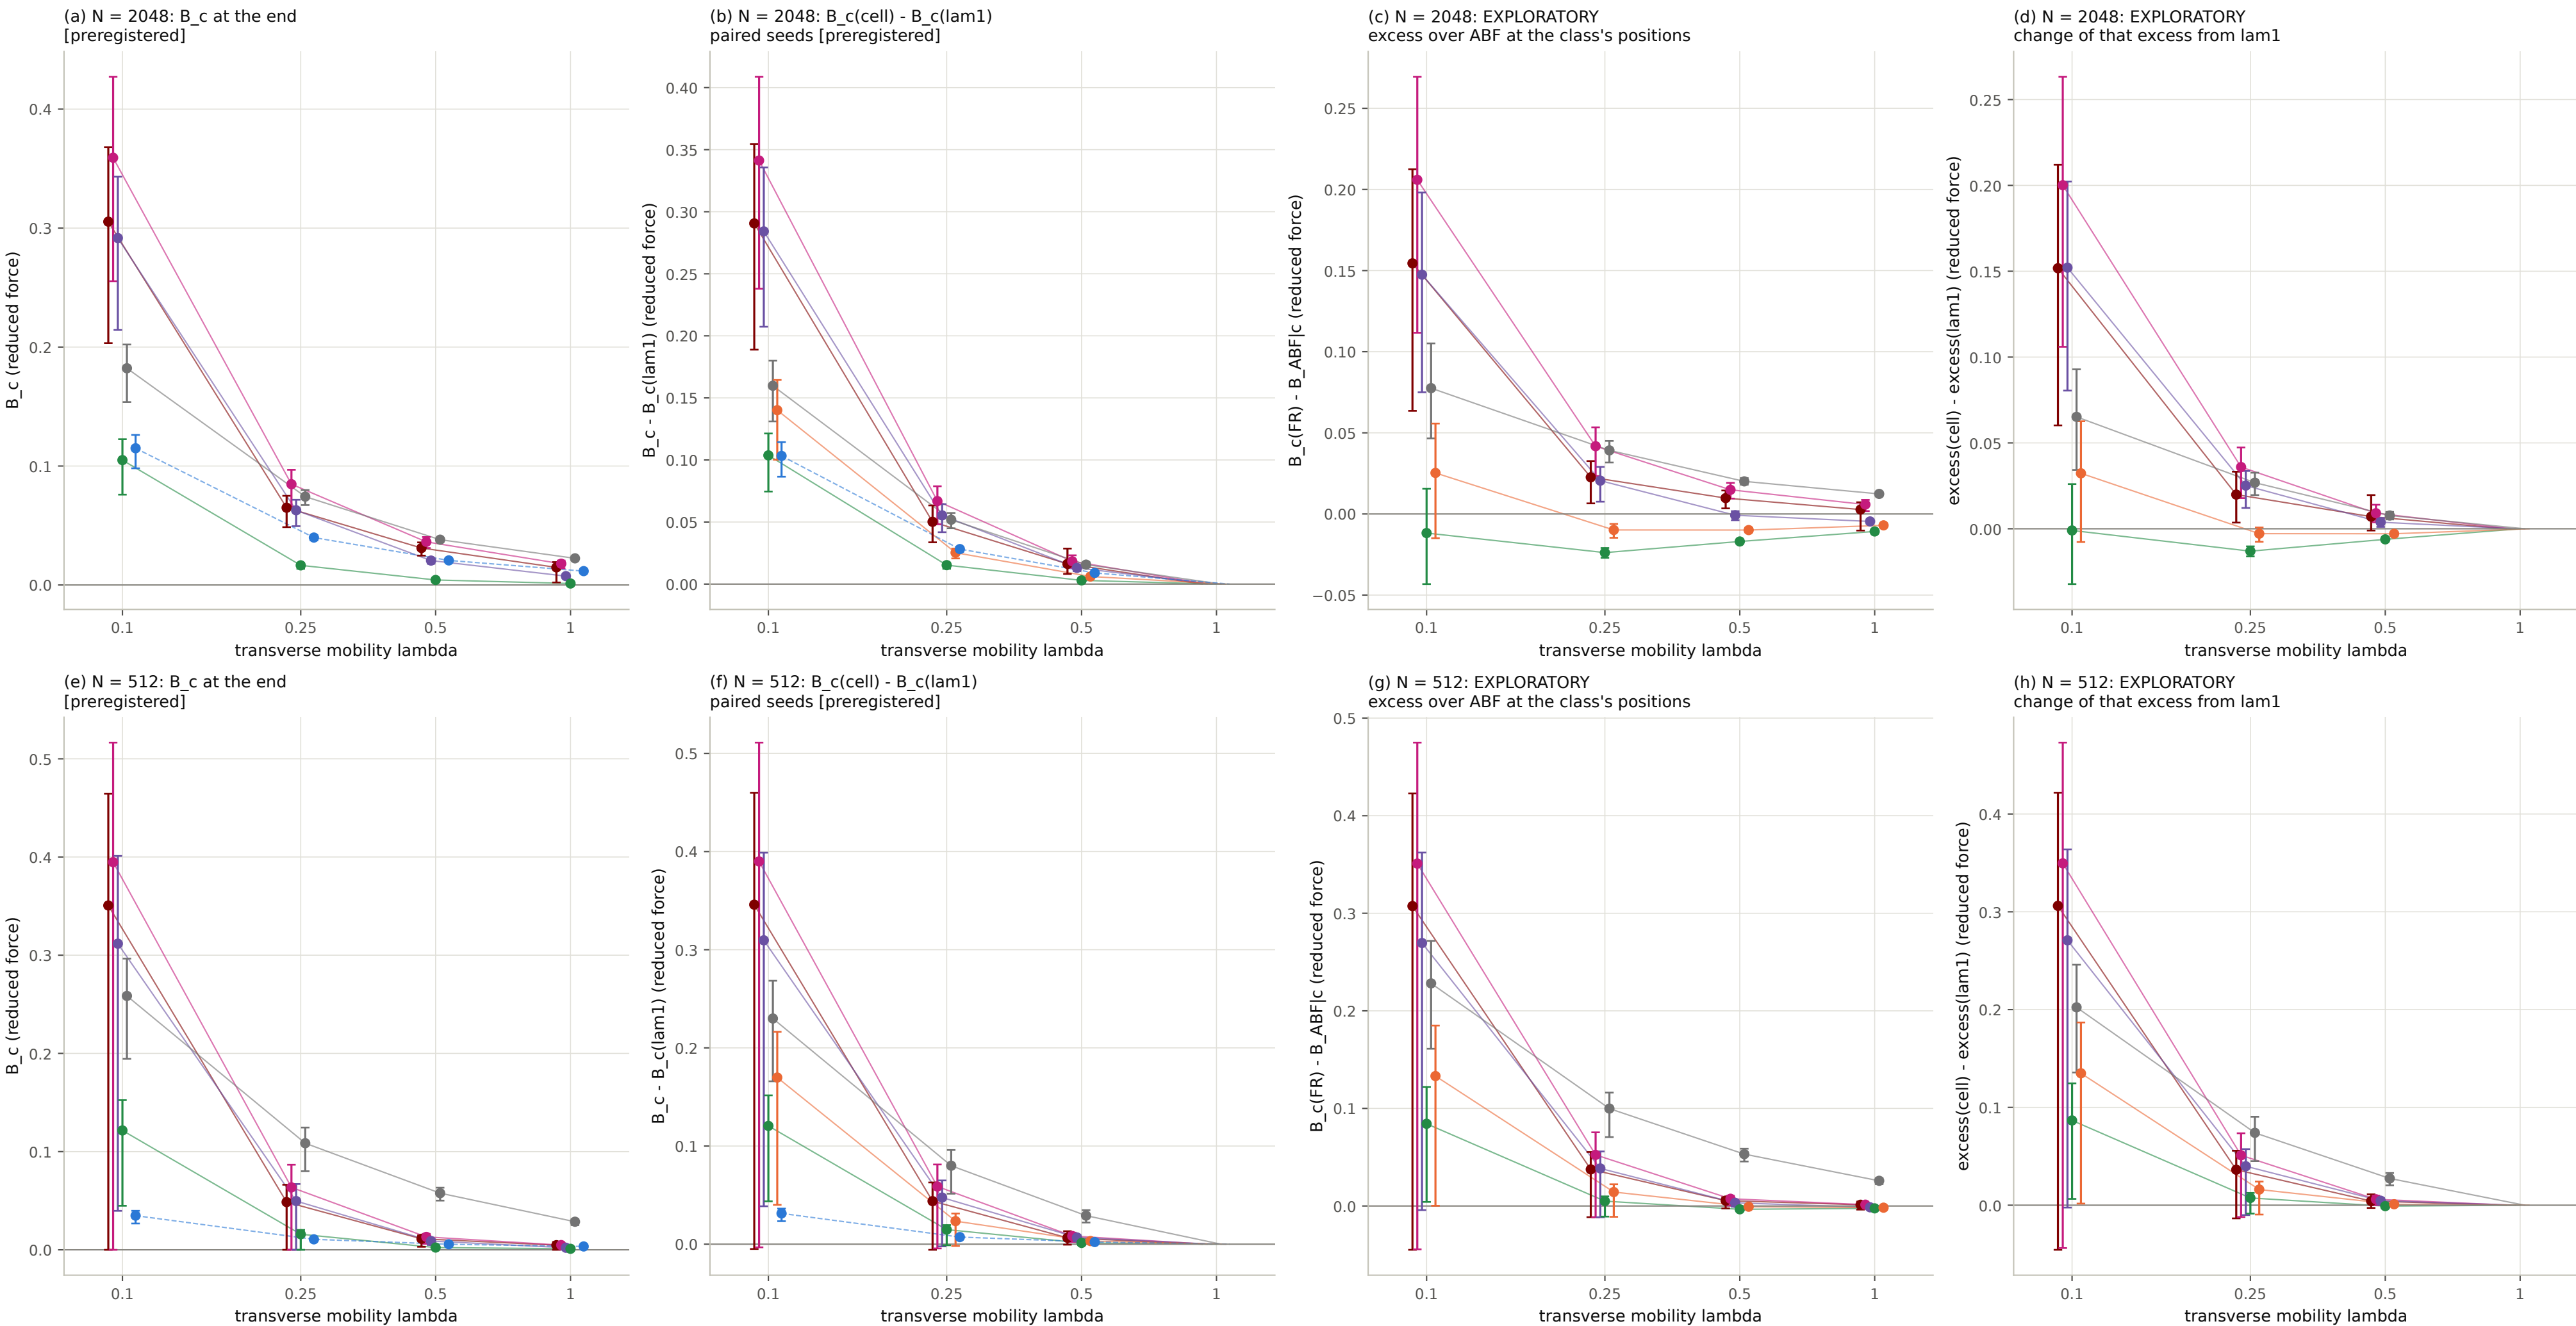

● FR clone age [0,0.01] t.u. ● FR clone age [0.1,1] t.u. ● FR never cloned ● ABF, all deposits (reference level)
● FR clone age [0.01,0.1] t.u. ● FR clone age ≥ 1 t.u. ● FR, all deposits (columns 2-4) — error bars: 95 % seed-bootstrap CI (basic, debiased)