


# Gateway family conditional\_relaxation/lam0.1 · N = 512 · T\_N = 160 t.u.


n\_steps = 6,400,000 · h = 2.5e-05 · B = N n\_steps = 3.277e+09 walker-steps · complete seeds: ABF 32/32, ABF+FR 32/32

Walker traces of slots 0-31, seed 8100


(a) ABF · seed 8100 · slots 0-31 · first 16 t.u.

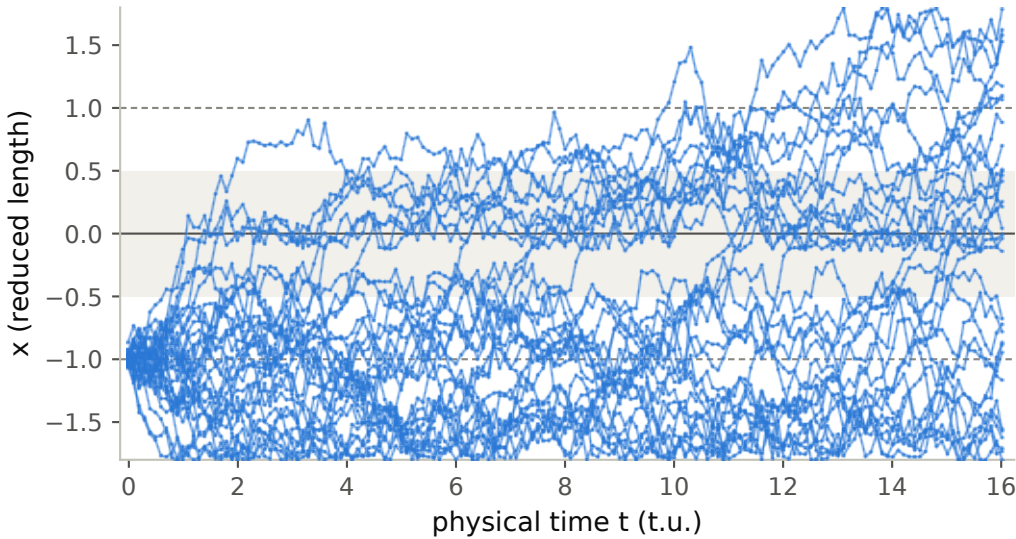


(b) ABF · seed 8100 · slots 0-31 · whole run (T\_N = 160 t.u.)

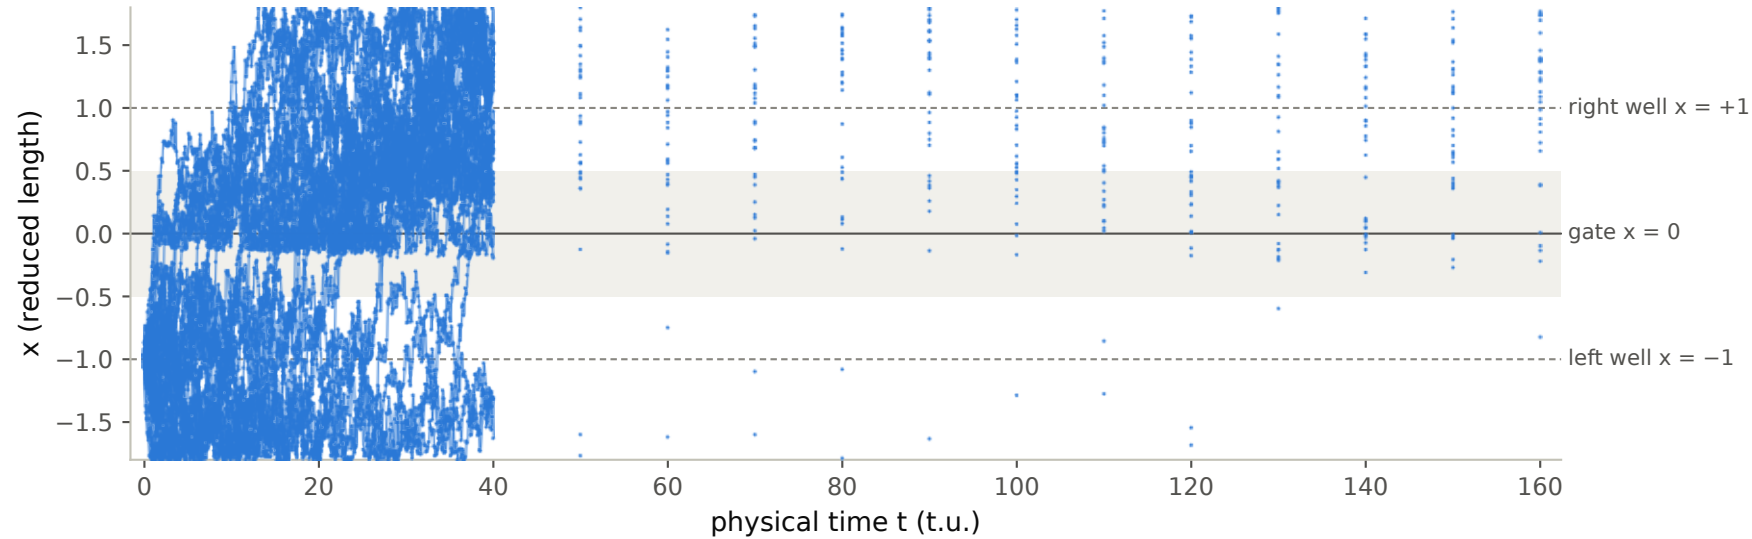

(c) ABF+FR · seed 8100 · slots 0-31 · first 16 t.u.

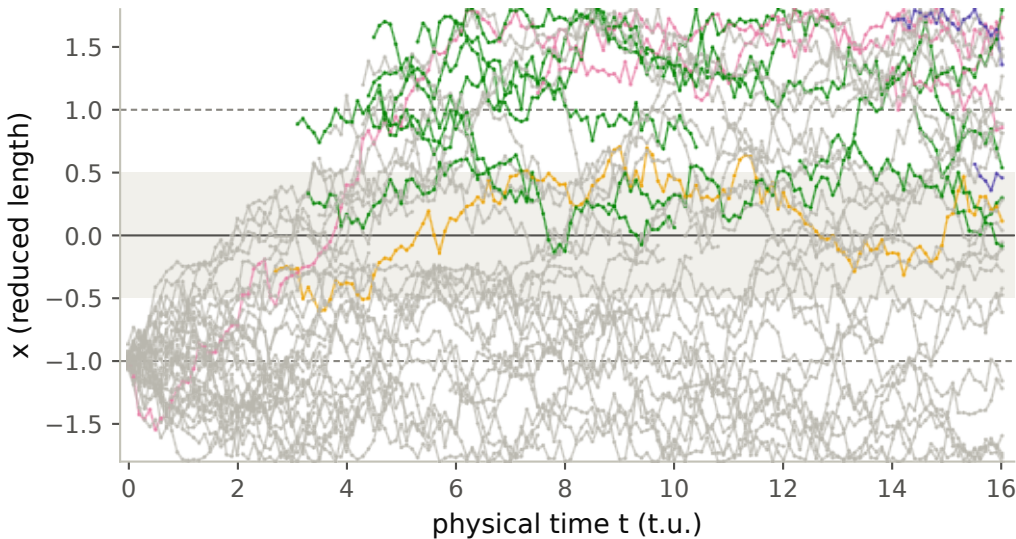

(d) ABF+FR · seed 8100 · slots 0-31 · whole run (T\_N = 160 t.u.)

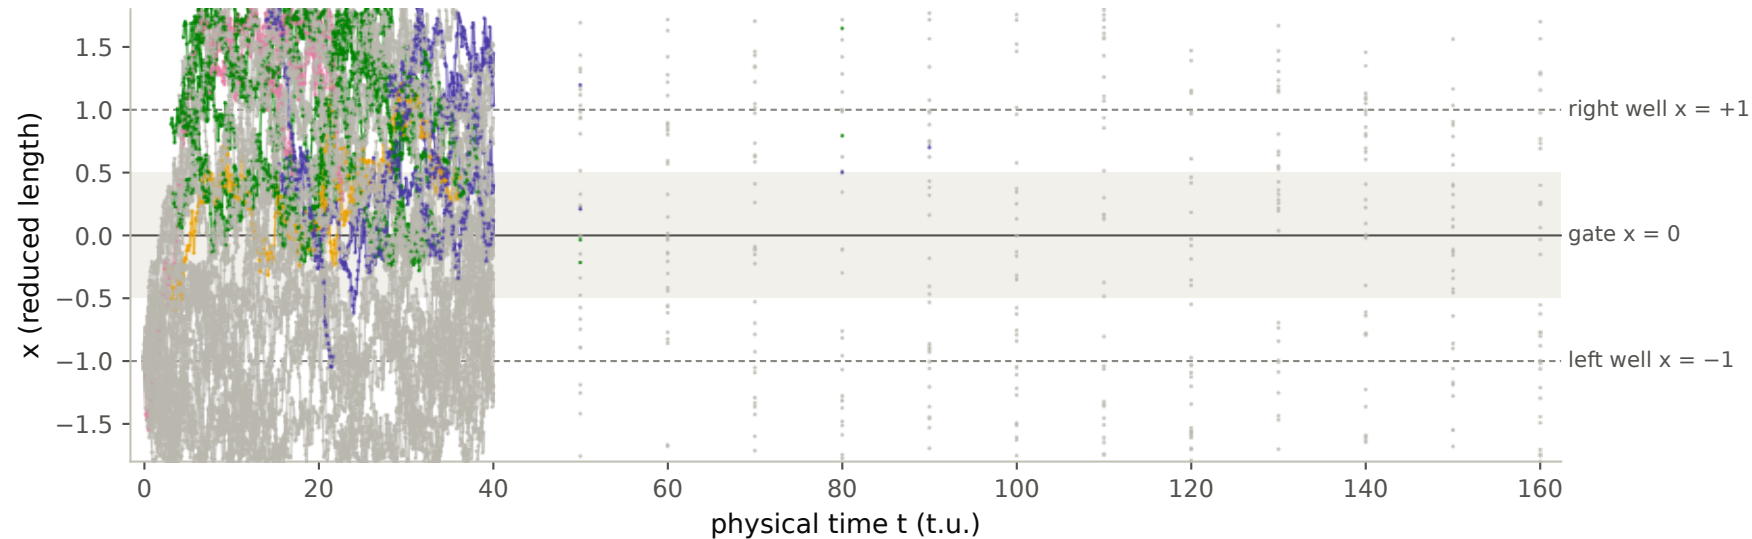

- ABF (every walker its own lineage)
- ABF+FR lineage of ancestor 274 (694 trace points)
- ABF+FR lineage of ancestor 396 (393 trace points)
- ABF+FR lineage of ancestor 444 (1531 trace points)
- ABF+FR lineage of ancestor 2 (409 trace points)
- ABF+FR: all other lineages

Trace seed 8100 = the first seed of the config with every arm complete (reproducible choice). Dots = saved trace points; lines join consecutive points only on the dense trace grid ( $\Delta t = 0.1$  t.u.) and never across a lineage change, a rebirth or a jump  $> 0.6$  (walker reborn as a copy). FR colours: the 4 whole-run ancestor labels with the most trace points among the traced slots; the rest grey.

Shaded band: gate region  $|x| \leq 0.5$ ; dashed: well minima  $x = \pm 1$ .

eqb\_plot\_config/2 · config lam0.1.json · 2026-10-10 14:20 UTC