
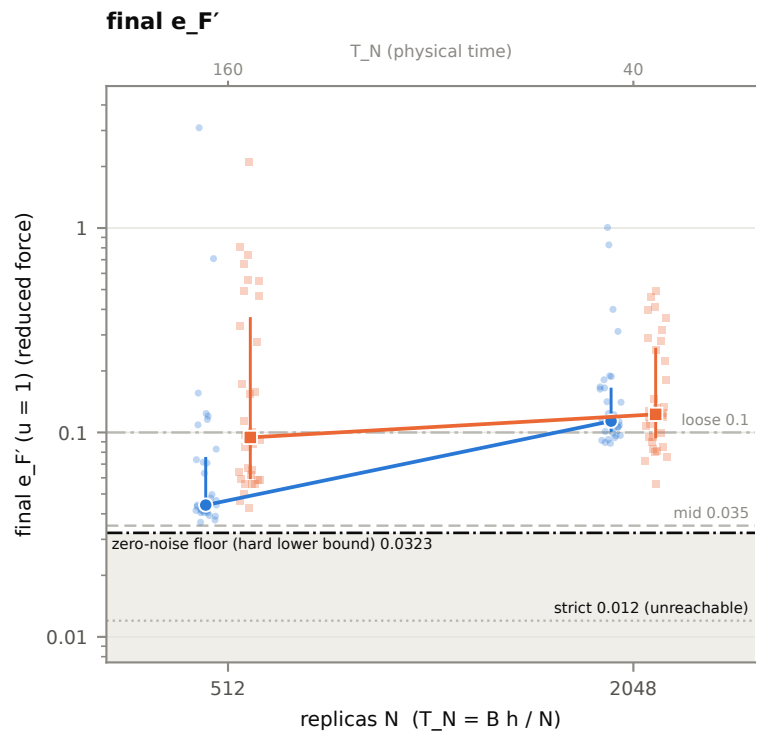


# gateway lam0.1: absolute mean-force error vs N

Equal total budget per arm per seed:  $B = N \times n\_steps = 3.2768e+09$  walker-steps at every  $N$  ( $h = 2.5e-05$ ,  $T\_N = B \cdot h / N$ ); 32 seeds per ( $N$ , method). ABF and ABF + FR: seed median, IQR and per-seed points.

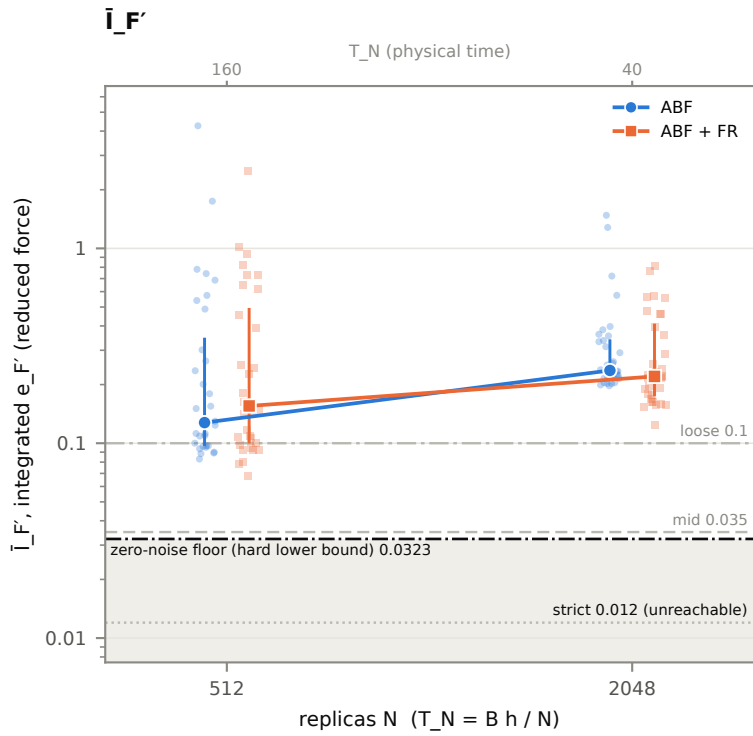

gateway lam0.1 · S2\_mean\_force\_abs\_vs\_N · status: all planned ( $N$ , seed, method) complete · FR is not defined at  $N = 1$  (ABF only, by design).  
Markers: seed median; whiskers: IQR over seeds; faint points: individual seeds. Grey lines: the frozen strict / mid / loose thresholds of  $e(t)$  (shown for scale on the integrated errors as well).  
Reference floors: lbar\_Fp: every estimate lies above the zero-noise floor 0.03227 ( $e^2 = \text{stat}^2 + \text{floor}^2$ ); thresholds below it are unreachable by construction; final\_e\_Fp: every estimate lies above the zero-noise floor 0.03227 ( $e^2 = \text{stat}^2 + \text{floor}^2$ ); thresholds below it are unreachable by construction.  
Source results/mechanism/conditional\_relaxation/lam0.1/analysis/summary.json (generated 2026-10-10T14:19:12Z, eqb\_metrics/2, 10000 bootstrap resamples); plot\_synthesis/2.